



Department of Justice
Federal Bureau of Investigation

Deleted: ¶
Formatted: Right

CRIMINAL JUSTICE INFORMATION SERVICES (CJIS)

**ELECTRONIC BIOMETRIC TRANSMISSION
SPECIFICATION (EBTS)**

XXXXX 99, 9999

Deleted: April 1, 2008

Prepared By:

**Federal Bureau of Investigation
Criminal Justice Information Services Division
1000 Custer Hollow Road
Clarksburg, WV 26306**

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

XXXX 99, 9999

This page is intentionally left blank.

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

CHANGE HISTORY 2008

| Version/ Revision | Description of Change | QA Approval | Date |
|----------------------|--|-------------|--------------|
| EBTS Ver 8.1 | <p>Section 1.2</p> <ul style="list-style-type: none"> • Updated to include all 6 segments (EFCON, III, AFIS, ITN, IDWH, and iDSM). <p>Section 3</p> <ul style="list-style-type: none"> • Changed ‘EFTS’ entries to ‘EBTS’ entries in figures 2-7 • Renumbered tables 1-13. • Updated body to agree with previous changes to Table D-3 • Updated to reflect changes and additions to Appendix C <p>Section 3.9.4</p> <ul style="list-style-type: none"> • Updated to include that CJIS will accept 1000 ppi images <p>Appendix C</p> <ul style="list-style-type: none"> • Updated Appendix to agree with previous changes to Table D-3 • Addition of following tags: Firearms Flag (scheduled with DSPE) DNA Flag (scheduled for F10.1) DNA Location (scheduled for F10.1) CODIS Flag, DNA located in CODIS (scheduled for F10.1) Seal Arrest Indicator (SPCR 28051) (schedule TBD) • Update citizenship field to allow up to 10 entries (SPCR 24049) (scheduled for F10.1) • Removal of SPC items , previously marked as “Internal Use Only” • Remove Section 3.12 and renumber remaining sections • Correct section numbering in Tables L-3 and L-4 • Remove all references to SPC TOTs in | | July 2, 2008 |

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

| Version/ Revision | Description of Change | QA Approval | Date |
|----------------------|---|-------------|------|
| | <p>acronym list and other places</p> <ul style="list-style-type: none"> • Revised Rap Back Services to include was APB previously approved and removed all specific definitions that need to wait until NGI design phase • Removed all wording in “Requirements for Logical Record Types” sections in the various parts of the body as Tables L-3 and L-4 have a better representation • Revised Table C-1 <ul style="list-style-type: none"> ○ contains of all possible Type-2 fields ○ corrected field sizes and min/max occurrences • Removal of duplicate tables, because of updated Table C-1 and Table D-3: <ul style="list-style-type: none"> ○ Remove Tables D-1 and D-2 ○ Revised Table I-1 (from detail to summary) ○ Remove Tables K-1 -> K-4, summarized in Table I-1 • Made revisions to Appendix E, updated latent entries in Tables E-1 and E-2 • Removal of ‘Internal Use Only’ error codes in Table M-1 • Divide EBTS into 2 parts: Part I is original SMTP message (ANSI/NIST-ITL Part I) and Part II is NEIM/XML version (ANSI/NIST-ITL Part II) | | |

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

TABLE OF CONTENTS

| | |
|---|-----|
| CHANGE HISTORY..... | iii |
| TABLE OF CONTENTS..... | v |
| LIST OF TABLES..... | ix |
| LIST OF FIGURES..... | x |
| LIST OF APPENDICES..... | xi |
| PREFACE..... | i |
| How To Use This Document..... | i |
| SECTION 1 INTRODUCTION..... | 1 |
| 1.1 Background..... | 1 |
| 1.2 Contents of Specification..... | 2 |
| 1.2.1 File format..... | 3 |
| 1.3 Change Control..... | 3 |
| 1.4 Tagged Fields..... | 4 |
| 1.4.1 Interpretation of Tags..... | 4 |
| 1.4.2 Use of Separator Characters..... | 4 |
| 1.5 Error Handling..... | 5 |
| 1.6 Identifying Previous Transactions..... | 6 |
| 1.7 Data Storage in the IAFIS Database..... | 6 |
| 1.8 Guidance on ORI and CRI Usage..... | 6 |
| SECTION 2 SCOPE..... | 1 |
| SECTION 3 DESCRIPTION OF OPERATIONAL CONCEPTS..... | 3 |
| 3.1 Electronic Fingerprint Identification Submissions..... | 5 |
| 3.1.1 Type of Transaction Definitions..... | 7 |
| 3.1.1.1 Criminal Tenprint Submission (Answer Required) (CAR)..... | 7 |
| 3.1.1.2 Criminal Tenprint Submission (No Answer Necessary) (CNA)..... | 8 |
| 3.1.1.3 Criminal Fingerprint Card Direct Route (CPDR)..... | 8 |
| 3.1.1.4 Criminal Fingerprint Card Processing Non-Urgent (CPNU)..... | 9 |
| 3.1.1.5 Department Order Channeling Electronic (DOCE) (Future Capability to be implemented in the F.9.0 IAFIS Build)..... | 9 |
| 3.1.1.6 Electronic Disposition Reporting (DSPE) (Future Capability)..... | 9 |
| 3.1.1.7 Electronic In/Manual Out (EMUF)..... | 10 |
| 3.1.1.8 Federal Applicant (No Charge) (FANC)..... | 10 |
| 3.1.1.9 Federal Applicant User Fee (FAUF)..... | 10 |
| 3.1.1.10 Electronic Fingerprint Disposition Submission (FDSP) (Future Capability).... | 11 |
| 3.1.1.11 Federal No Charge Direct Route (FNDR)..... | 11 |
| 3.1.1.12 Non-Federal No Charge Direct Route (NNDR)..... | 11 |
| 3.1.1.13 Non-Federal Advanced Payment (NFAP)..... | 12 |
| 3.1.1.14 Non-Federal Applicant User Fee (NFUF)..... | 12 |
| 3.1.1.15 Miscellaneous Applicant Civil (MAP)..... | 12 |
| 3.1.1.16 Known Deceased (DEK)..... | 13 |
| 3.1.1.17 Unknown Deceased (DEU)..... | 13 |
| 3.1.1.18 Missing Person (MPR)..... | 13 |
| 3.1.1.19 Amnesia Victim (AMN)..... | 13 |

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

| | | |
|----------|---|----|
| 3.1.1.20 | Major Case Print Collection in Conjunction with Tenprint Submissions..... | 14 |
| 3.1.1.21 | Non-Federal User-fee Expedite (NFUE) | 21 |
| 3.1.1.22 | Rapid Print Image Search (RPIS) and Response (RPSR) (Future Capability).. | 22 |
| 3.1.1.23 | International Terrorist File Request (ITF) and Response (ITFR) (Future Capability)..... | 22 |
| 3.1.1.24 | Submission Results – Electronic (SRE)..... | 22 |
| 3.1.1.25 | Disposition Response (DSPR) (Future Capability) | 24 |
| 3.1.1.26 | Fingerprint Verification Report (FVR) (Future Capability) | 25 |
| 3.1.1.27 | Tenprint Transaction Error (ERRT)..... | 25 |
| 3.1.2 | Requirements for Logical Record Types | 25 |
| 3.2 | Investigative Fingerprint Searches..... | 25 |
| 3.2.1 | Type of Transaction Definitions | 27 |
| 3.2.1.1 | Tenprint Fingerprint Image Searches (TPIS)..... | 27 |
| 3.2.1.2 | Tenprint Fingerprint Features Search (TPFS)..... | 27 |
| 3.2.1.3 | Search Results – Tenprint (SRT) | 28 |
| 3.2.1.4 | Tenprint Transaction Error (ERRT)..... | 28 |
| 3.2.1.5 | Tenprint Rap Sheet Searches (TPRS) and Response (TPRR) | 28 |
| 3.2.2 | Requirements for Logical Record Types | 28 |
| 3.3 | Electronic Submission of Latent Prints..... | 29 |
| 3.3.1 | Type of Transaction Definitions | 31 |
| 3.3.1.1 | Latent Fingerprint Image(s) Submission (LFS)..... | 31 |
| 3.3.1.2 | Comparison Fingerprint Image(s) Submission (CFS) (For use by FBI only) | 31 |
| 3.3.1.3 | Major Case Image(s) Submission (MCS) (For use by FBI only) | 32 |
| 3.3.1.4 | Evaluation Latent Fingerprint Submission Request (ELR) (For use by FBI only) | 32 |
| 3.3.1.5 | Latent Submission Results (LSR)..... | 32 |
| 3.3.1.6 | Notification of Action Response (NAR)..... | 32 |
| 3.3.1.7 | Latent Transaction Error (ERRL)..... | 33 |
| 3.3.2 | Requirements for Logical Record Types | 33 |
| 3.4 | Latent Fingerprint Searches | 33 |
| 3.4.1 | Type of Transaction Definitions | 36 |
| 3.4.1.1 | Latent Fingerprint Image(s) Search (LFIS) | 36 |
| 3.4.1.2 | Latent Fingerprint Features Search (LFFS) | 37 |
| 3.4.1.3 | Search Results – Latent (SRL)..... | 37 |
| 3.4.1.4 | Unsolved Latent Match Response (ULM)..... | 37 |
| 3.4.1.5 | Latent Penetration Query (LPNQ)..... | 38 |
| 3.4.1.6 | Latent Penetration Query Response (LPNR)..... | 38 |
| 3.4.1.7 | Latent Search Ident Response (LSIR)..... | 38 |
| 3.4.1.8 | Transaction Error (ERRL) | 38 |
| 3.4.2 | Requirements for Logical Record Types | 38 |
| 3.5 | Latent File Maintenance Requests..... | 39 |
| 3.5.1 | Type of Transaction Definitions | 40 |
| 3.5.1.1 | Unsolved Latent Record Delete Request (ULD) | 40 |
| 3.5.1.2 | Unsolved Latent Add Confirm Request (ULAC)..... | 40 |
| 3.5.1.3 | Unsolved Latent Add Confirm Response (ULAR)..... | 40 |
| 3.5.1.4 | Unsolved Latent Delete Response (ULDR)..... | 40 |

Deleted: 28

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

- 3.5.1.5 Unsolicited Unsolved Latent Delete (UULD) 40
- 3.5.1.6 Latent Transaction Error (ERRL) 40
- 3.5.2 Requirements for Logical Record Types 41
- 3.6 Requests For Images 41
 - 3.6.1 Type of Transaction Definitions 42
 - 3.6.1.1 Image Request (IRQ) 42
 - 3.6.1.2 Image Request Response (IRR) 42
 - 3.6.1.3 Image Summary Response (ISR) 43
 - 3.6.1.4 Image Transaction Error (ERRI) 43
 - 3.6.2 Requirements for Logical Record Types 44
- 3.7 Electronic Requests To Upgrade Fingerprint Images 44
 - 3.7.1 Type of Transaction Definitions 44
 - 3.7.1.1 Fingerprint Image Submission (FIS) 44
 - 3.7.1.2 Fingerprint Image Submission Response (FISR) 45
 - 3.7.2 Requirements for Logical Record Types 45
- 3.8 Error Message Format 46
- 3.9 Other Special Requirements for Communicating With IAFIS 47
 - 3.9.1 Electronic Fingerprint Images 47
 - 3.9.2 Fingerprint Image Compression/Decompression Algorithm 47
 - 3.9.3 Fingerprint Image Quality Specifications 48
 - 3.9.4 Fingerprint Image Size Requirements 48
- 3.10 Electronic Subject Photo Services 49
 - 3.10.1 Type of Transaction Definitions 50
 - 3.10.1.1 Subject Photo Request (CPR) 50
 - 3.10.1.2 Subject Photo Delete Request (CPD) 50
 - 3.10.1.3 Photo Responses 50
 - 3.10.2 Requirements for Logical Record Types 51
- 3.11 Latent Administrative Queries, Requests and Responses 51
 - 3.11.1 Type of Transaction Definitions 51
 - 3.11.1.1 Latent Repository Statistics Query (LRSQ) 51
 - 3.11.1.2 Latent Search Status and Modification Query (LSMQ) 51
 - 3.11.1.3 Latent Repository Statistics Response (LRSR) 52
 - 3.11.1.4 Latent Search Status and Modification Response (LSMR) 53
 - 3.11.1.5 Administrative Transaction Error (ERRA) 53
 - 3.11.2 Requirements for Logical Record Types 53
- 3.12 Palmprint Services (Future Capability) 53
 - 3.12.1 Type of Transaction Definitions 53
 - 3.12.1.1 Palmprint Enrollment (PPE) and Response (PPR) (Future capability) 53
 - 3.12.2 Requirements for Logical Record Types 54
- 3.13 Facial Recognition Services (Future Capability) 54
- 3.14 Iris Services (Future Capability) 54
 - 3.14.1 Type of Transaction Definitions 54
 - 3.14.1.1 Iris Image Enrollment (IIE) and Response (IIER) (Future Capability) 54
 - 3.14.2 Requirements for Logical Record Types 55
- 3.15 Rap Back Services (Future Capability) 55
 - 3.15.1 Rap Back Enrollment Requests 55

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

3.15.1.1 Indirect Enrollment Requests (Future Capability)..... 55
3.15.1.2 Direct Enrollment Requests (Future Capability) 55
3.15.2..... 55
Rap Back Activity Notification (Future Capability)..... 55
3.15..... 56
3 Rap Back Maintenance Request (Future Capability)..... 56
3.15.4 Requirements for Logical Record Types 56
3.16 Other Biometric Services (Future Capability) 56

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"
Deleted: 002
Deleted: APRIL 1, 2008

LIST OF TABLES

| | |
|--|------|
| Table 3-0 Major Case Print Codes..... | 19 |
| Table 3-1 Values of NAM, UCN and SID Returned in the SRE..... | 22 |
| Table 3-2 Compression Algorithm Values | 50 |
| Table 3-3 Maximum Size for Fingerprint..... | 51 |
| Table 3-4 Type-99 CBEFF biometric data record layout | 61 |
| Table A-1 Priorities..... | A-1 |
| Table B-1 Field List for Type-1 (Transaction) Logical Records | B-5 |
| Table C-1 Field Edit Specifications for Type-2 Elements | C-26 |
| Table D-1 Field List for Tenprint, Answer-Required (CAR) Transaction | D-2 |
| Table D-2 Field List for Tenprint Response, Electronic (SRE) Transactions | D-7 |
| Table D-3 Summary Field List for Tenprint Transactions | D-13 |
| Table E-1 Summary Field Lists for Latent Transactions (Part 1 of 2) | E-1 |
| Table E-2 Summary Field Lists for Latent Transactions (Part 2 of 2) | E-4 |
| Table F-1 Preferred Capture Sizes | F-3 |
| Table F-2 MTF Requirement Using Sine Wave Target..... | F-6 |
| Table F-3 CTF Requirement Using Bar Target (Nominal Test Frequencies) | F-6 |
| Table F-5 Fast Track Certification Procedures (Common Scenarios)..... | F-20 |
| Table H-1 Field List for Type-7 (Miscellaneous Image) Logical Records | H-3 |
| Table I-1 Field List of Image Request (IRQ) Transaction..... | I-1 |
| Table I-2 Field List for Image Request Response (IRR) Transaction | I-2 |
| Table I-3 Field List for Image Error Response (ERRI) Transaction | I-4 |
| Table I-4 Field List for Fingerprint Image Submission (FIS) Transaction..... | I-5 |
| Table I-5 Field List for Fingerprint Image Submission Response (FISR)..... | I-6 |
| Table I-6 Field List for Image Submission Response (ISR) Transaction | I-7 |
| Table J-1 Field List for Type-9 (Minutiae) Native-Mode Tenprint Logical Record..... | J-11 |
| Table J-2 Field List for a Type-9 (Minutiae) Native-Mode Latent Logical Record..... | J-16 |
| Table K-1 Field List for Subject Photo Request (CPR) Transaction..... | K-5 |
| Table K-2 Field List for Subject Photo Delete Request (CPD) Transaction | K-6 |
| Table K-3 Field List for Subject Photo Request Response (PRR) Transaction..... | K-7 |
| Table K-4 Field List for Subject Photo Delete Request Response (PDR) Transaction..... | K-8 |
| Table K-5 Field List for Type-10 (Photo) Logical Records | K-9 |
| Table L-1 Complete Element Cross-Reference List by ID..... | L-2 |
| Table L-2 Complete Element Cross-Reference List by Tag Number..... | L-9 |
| Table L-3 <u>Record set</u> Requirements Summary by Type of Transaction | L-21 |
| Table L-4 <u>Record set</u> Requirements Summary by Type of Response | L-23 |
| Table M-1 Transaction Error Messages..... | M-2 |
| Table N-1 Finger Position Code and Maximum Size..... | N-2 |
| Table N-2 Finger Impression Type | N-3 |
| Table N-3 Field List for Flats Civil Check Type-14 Record | N-5 |

Deleted: Recordset

Deleted: Recordset

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

LIST OF FIGURES

| | |
|---|----|
| Figure 1 Electronic Fingerprint Identification Submissions | 5 |
| Figure 2 FBI Standard Fingerprint Card (DF-249)..... | 15 |
| Figure 3 FBI Standard Palmprint Card (FD-884) Front | 16 |
| Figure 4 FBI Standard Palmprint Card (FD-884) Reverse | 17 |
| Figure 5 FBI Standard Supplemental Finger/Palmprint Card - Front..... | 18 |
| Figure 6 FBI Standard Supplemental Finger/Palmprint Card - Reverse | 19 |
| Figure 7 Distal, Medial, and Proximal Joints | 21 |
| Figure 8 Investigative Fingerprint Searches | 26 |
| Figure 9 Electronic Latent Submission..... | 30 |
| Figure 10 Investigative Latent Searches | 35 |
| Figure 11 Electronic Requests to Delete Unsolved Latent Fingerprint Records | 39 |
| Figure 12 Fingerprint Image Request | 43 |
| Figure 13 Electronic Requests to Upgrade Fingerprint Images..... | 45 |

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

LIST OF APPENDICES

Appendix A: Transaction Priorities A-1
Appendix B: Descriptors and Field Edit Specifications for Type-1 Logical
Records B-1
Appendix C: Descriptors and Field Edit Specifications for Type-2 Logical
Records C-1
Appendix D: Logical Record Layouts for Type-2 (Tenprint) D-1
Appendix E: Summary Field Lists for Latent Transactions.....E-1
Appendix F: IAFIS Image Quality Specifications F-1
Appendix G: RESERVED G-1
Appendix H: Descriptors and Field Edit Specifications for Type-7 Logical
Records H-1
Appendix I: Logical Record Layout for Type-2 (Image) Records I-1
Appendix J: Descriptors and Field Edit Specifications for Type-9 Logical
Records J-1
Appendix K: Descriptors and Field Edit Specifications for Type-10 Logical
Records and Logical Record Field List for Type-2 (Photo)
Records K-1
Appendix L: Summary TablesL-1
Appendix M: Transaction Error MessagesM-1
Appendix N: Civil Background Checks Using Flat Impressions Descriptors And
Field Edit Specifications for Type-14 Logical Records N-1

Appendix AC: Acronyms AC-1

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

PREFACE

How To Use This Document

The appendices of this document contain all the information needed regarding a particular type of electronic transaction when communicating with the FBI. Definitions for transaction types can be found in Section 3. Appendix A briefly presents priorities for each transaction type. Appendix B is the field list for Type-1 records ([Header Information](#)). Appendix C contains the definitions of fields used for the Type-2 records ([Transaction Descriptive, Demographic, and Biographic Information](#)). Type-2 field lists can be found in Appendix D for tenprint transactions and in Appendix E for Latent searches and submissions. Appendix F gives IAFIS Image Quality Specifications for fingerprint scanners, both for traditional rolled prints and “Identification Flats,” and printers, and gives Fast Track Certification procedures. Appendix G is currently Reserved for Future Use. Appendix H presents the Type-7 ([Tenprint Fingerprint Card Images](#)) logical record field list, including descriptors and edit specifications. Appendix I presents Type-2 record layouts for image retrieval and maintenance transactions. Appendix J gives the Type-9 ([Fingerprint Minutiae Information](#)) logical record field list, including descriptors and edit specifications. Appendix K details the Type-10 ([Photo Images](#)) logical record field list and the Type-2 (Photo) transaction field lists. Appendix K also gives considerable detail concerning photos and Type-2 descriptor information for Scars, Marks, and Tattoos. Appendix L provides a complete cross-reference of elements and their tag numbers and lists logical record requirements for each EBTS transaction type. Appendix M contains error message details. Appendix N provides definition descriptors and field edits of Type-14 ([Flat ‘Civil’ Fingerprint Images](#)) records for Civil Background Checks using flat impressions.

For example, to obtain information for sending a Criminal Tenprint Submission, (Answer Required) (CAR), refer to Section 3 for CAR definition, Appendix B for Type-1 logical record field list, Appendix D for the Type-2 CAR transaction field list, and Appendix C for field definitions.

Formatted: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border)

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

Deleted: ¶

This page is intentionally left blank.

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

SECTION 1 INTRODUCTION

1.1 Background

For nearly 100 years, fingerprint cards have been accepted as the standard means for recording and storing fingerprint identification data. Over that period, the content, format, and quality of fingerprint cards have been revised and refined. Fingerprint cards have evolved into an accepted international standard for the exchange of fingerprint, identification, and arrest data between criminal and non-criminal justice agencies.

Formatted: Left

Historically fingerprint cards were physically transported and processed; therefore, substantial delays were recognized in the identification cycle. The IAFIS was developed to support the paperless submission of fingerprint information. This improved the speed and accuracy of the fingerprint identification process and eliminated the need for contributing agencies to create and transport paper fingerprint cards to the FBI.

Formatted: Left

In support of the development of the IAFIS and in accordance with the recommendations of the National Crime Information Center (NCIC) Advisory Policy Board (APB) (currently known as the CJIS APB) Identification Services Subcommittee, the FBI has developed a standard for electronically encoding and transmitting fingerprint image, identification, and arrest data. ANSI/NIST-ITL was established in conjunction with the National Institute of Standards and Technology (NIST) and the fingerprint identification community. This specification is the American National Standards Institute (ANSI) standard titled the "Data Format for the Interchange of Fingerprint, Facial, and Other Biometric Information" (ANSI/NIST-ITL 1-2007).

Formatted: Left

The original intent of the ANSI standard was to define the content, format, and units of measurement for the exchange of information that may be used in the fingerprint identification of a subject. The ANSI standard was intended for use in the interchange between criminal justice administrations or organizations that use an Automated Fingerprint Identification System (AFIS) and to provide a common interface for other AFIS and related systems worldwide. Later revisions to this standard have added information regarding additional biometric modes of identification, such as palm, facial, and iris recognition.

Formatted: Left

While the aforementioned ANSI standard provides the guidelines for the exchange of biometric information between various federal, state, local, tribal, and international systems, the FBI's Electronic Biometric Transmission Specification (EBTS) defines requirements that agencies must adhere to when electronically communicating with the FBI's IAFIS. The FBI EBTS and its future revisions will inherit the basic requirements for logical records set forth in the ANSI standard. However, the FBI-specific requirements for the ANSI/NIST implementation of logical records Type-2, Type-7, Type-9, Type-10, Type-13, Type-14, Type-15 and other record types are contained in the EBTS.

Formatted: Left

The FBI CJIS Division is moving toward a system that will contain a complete biometric and biographic profile of the subject records in its databases. It is also the FBI's intent to move toward a capability that will facilitate multi-modal biometric searching of its databases. Though fingerprints will continue to be the FBI's primary mode of identification for the near future, the

Formatted: Left

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

XXXX 99, 9999

FBI EBTS document describes the technical specifications for the submission of the additional biometric modalities to provide this future multi-modal biometric search capability.

The scope of the EBTS has been expanded over previous versions to include additional biometric modalities (e.g., palmprint, facial, and iris) in recognition of the rapidly developing biometric identification industry. The most recent update of the ANSI/NIST-ITL 1-2000 standard (ANSI/NIST-ITL 1-2007) includes new record types to facilitate data sharing for new biometric modalities. The FBI EBTS will integrate biometric data in accordance with the ANSI/NIST Standard Part 1. Additionally, a logical record Type-99 was created to contain and exchange biometric data that is not supported by other ANSI/NIST-ITL logical record types (e.g., voice records), thus providing a basic level of interoperability and harmonization with the ANSI INCITS (International Committee for Information Technology Standards) biometric image interchange formats. This is accomplished by using a basic record structure that is conformant with INCITS 398-2005, the Common Biometric Exchange Formats Framework (CBEFF) and a biometric data block specification registered with the International Biometrics Industry Association (IBIA).

Formatted: Left

Deleted: s

The Type-99 logical record type was created for "exotic" biometric data types and should not be used for existing ANSI/NIST data types. IAFIS will provide identification services for many of these evolving biometric modalities at some time in the future.

Formatted: Left

1.2 Contents of Specification

While the ANSI standard referenced in Section 1.1 will allow all AFISs and related systems to communicate, the purpose of this document is to specify certain requirements to which agencies must adhere to communicate electronically with the FBI's IAFIS. IAFIS has six segments: (1) Identification, Tasking, and Networking (ITN/FBI), (2) Automated Fingerprint Identification System (AFIS/FBI), (3) the Interstate Identification Index (III/FBI), (4) Electronic Fingerprint Conversion (EFCON), (5) the interim Data Sharing Model (iDSM), and (6) the IAFIS Data Warehouse (IDWH). III/FBI electronic communications do not include fingerprints, and the requirements are contained in appropriate NCIC manuals. This specification covers the remainder of the IAFIS electronic transmissions involving fingerprints, palmprints, photographs, iris, and other future types of biometric data. The basic requirements for logical records Type-1 (Header Information), Type-2 (Transaction Descriptive, Demographic and Biographic Information), Type-4 (Fingerprint Image Descriptive Information), Type-7 (Tenprint Fingerprint Card Images), Type-9 (Fingerprint Minutiae Information), Type-10 (Photo Images), Type-13 (Supplemental Fingerprint and Palmprint Images), Type-14 (Flat 'Civil' Fingerprint Images), Type-15 (Palmprint Images), Type-17 (Iris Images), and Type-99 set forth in the ANSI standard are also applicable to transmissions to the FBI. However, the FBI-specific requirements for the contents and format of logical records Type-2, Type-7, Type-9, Type-10, Type-13, Type-14, Type-15, and Type-17, as well as for any special requirements for the other record types, are contained in this specification.

Formatted: Left

Deleted: three

Deleted: and

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

1.2.1 File format

A file shall contain one or more logical records pertaining to a single subject. The data in the Type-1 record shall always be recorded in variable-length fields using the 7-bit American National Standard Code for Information Interchange (ASCII) as described in ANSI X3.4-1986 and Annex A. For purposes of compatibility, the eighth (leftmost) bit shall contain a value of zero.

Formatted: Keep lines together

Formatted: Keep with next, Keep lines together

Formatted: Left, Keep with next, Keep lines together

The text or character data in the Type-2, Type-9, and tagged-field records will normally be recorded using the 7-bit ASCII code in variable-length fields with specified upper limits on the size of the fields. For data interchange between non-English-speaking agencies, character sets other than 7-bit ASCII may be used in textual fields contained in the Type-2, Type-9, and tagged-field records. UTF-8 is the preferred method of storing textual data that cannot be represented as 7-bit ASCII. This method supports international character sets for all user-defined fields in all record types. By definition, UTF-8 and other international character exchange methods are not applicable to record Type-1 and Types 3-8.

Formatted: Left

The first field in all tagged-field records shall be labeled as field "1" and contain the length in bytes of the record. The second field shall be labeled as field "2" and contain the image designation character. The remaining textual fields may occur in any order and contain the information as described for that particular numbered field. For tagged-field image records Type-10 through Type-99, the last and concluding field shall have a tagged ASCII field number identifier "999" followed by the image data.

Formatted: Left

For the binary image Type-3, Type-4, Type-5, Type-6, and Type-8 logical records, the content and order of the recorded fields are specified by this standard. With the exception of the first two fields, the remaining fields of the Type-7 logical image record are all user-defined. All fields and data in these record types shall be recorded as binary information.

Formatted: Left

1.3 Change Control

The Electronic Biometric Transmission Specification (EBTS) defines the interface between IAFIS and the states', tribes', international, and other federal organizations' (OFO) systems. Any changes to the data fields or formats within the EBTS must honor previously published protocols to ensure that the states' and OFO's systems are not adversely affected. Since IAFIS and the states'/OFO's systems were developed independently, a process has been established that provides for coordinated enhancements within the various systems while maintaining reliable interoperability. This process is based on the tagged field structure defined in the 2000 ANSI standard and a few "business rules." The rules simply state that field definitions cannot change over time or from system to system. If a change is needed, a new field is defined and assigned a new tag number. The new field cannot be made mandatory for established functionality, but merely *enhances* functionality for those systems wishing to incorporate the new definition. With this process in place, every system on the network has the opportunity to enhance its own system on its own schedule, yet no system is ever forced to make a change in order to maintain current functionality.

Formatted: Left

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

1.4 Tagged Fields

1.4.1 Interpretation of Tags

In the construction and interpretation of the logical record, the tag number should not be taken as having a fixed number of digits. The format for each field consists of the logical record type number followed by a period ".", a field number followed by a colon ":", followed by the information appropriate to that field. The tagged-field number can be any one to nine-digit number occurring between the period "." and the colon ":". It shall be interpreted as an unsigned integer field number. This implies that a field number of "2.123" is equivalent to and shall be interpreted in the same manner as a field number of "2.00000123".¹

For example, in this version of the standard, Type-2 logical record field tags are always shown as having three digits between the decimal point and colon (2.NNN:data...). However, in future versions, Type-2 field tag numbers may be expanded to four or more digits (2.NNNN:data...). To accommodate such possibilities, the field numbers should be parsed as all digits between the period and colon.

Formatted: Left

In the construction and interpretation of the logical record, there is no requirement that the tagged fields be present within the logical record in any given order, with the exception of the Length (LEN) and Image Designation Character (IDC), which must be in the first and second position in the record, respectively. Thus, for example, a State Identification Bureau could add the State Identification Number (SID) to the end of a Type-2 record created at the booking station. However, for those record types conveying image data (e.g., 13.999: DAT), the data field will always be the last field in the string.

Formatted: Left

1.4.2 Use of Separator Characters

Separator characters may best be understood by considering them necessary for what follows them, not what precedes them. Thus, when a tagged field includes subfields² (e.g., the ASL field contains subfields DOO and AOL), and another subfield is still to follow, the following one must be separated from the one preceding it by the *unit separator* character. If what is to follow is a repetition of a field or group of subfields, a *record separator* must separate the preceding field or group of subfields from the repetition to follow. If what is to follow is a new field, then the *group separator* character is used. If the record is complete after the previous field, the *file separator* is used.

Formatted: Left

Per NIST, successive separator characters now **may** be used with no intervening blank or other character when a subfield is missing. In Type-2 records, IAFIS recognizes the following

Formatted: Left

¹ ANSI/NIST-ITL 2007

² The EBTS' use of the term *subfield* is synonymous with the term *information item* found in the ANSI standard.

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

sequences as meaning that a subfield is missing: <US><US>, <US><RS>, <US><GS>, and <US><FS>. These are needed to obviate the need for IAFIS to validate each subfield in a grouped field to see whether it contains valid data or is merely a blank. This will keep invalid data out of IAFIS databases.

1.5 Error Handling

Error processing takes on two primary forms within IAFIS. These are front-end error detection and internal process error detection and correction. The front-end process examines every incoming transaction from a security and mandatory data perspective. Potential security violations are rejected and transferred immediately to a system administrator. Transactions lacking mandatory data, or that are incomplete in referenced content, are rejected. All mandatory data and all optional data fields are edit checked for length and type of data included. Optional data failing this validation check are ignored. Mandatory data that fail this validation check are passed to a Quality Control (QC) Service Provider for resolution. If the service provider can correct the data, the transaction will be forwarded for further processing. If the service provider cannot resolve the issue, the transaction can either be rejected or sent forward for attempted resolution later in the process.

Formatted: Left

Secondary edit checks are performed any time an IAFIS segment attempts to utilize incoming data to perform a search or update a database. Any such action will check the field according to length and type as well as content. Some data values are content-sensitive. That is, they can only be examined with respect to the databases against which they are to be applied. Errors in submissions detected at that time will generally be forwarded to a logic error resolution service provider. At that point, appropriate actions can be taken to correct the discrepancy, and an internal resubmission of the transaction can take place. Alternatively, if the service provider cannot resolve the issue, the transaction can be rejected.

Formatted: Left

In the interpretation of the logical record, tags that are not defined for the requested transaction are to be ignored; their inclusion is not to be considered an error. This rule makes it possible to use a single transmission format, for example, to control both intrastate and interstate transmissions.

Formatted: Left

Fields should not be transmitted when there is no value present (*e.g.*, ... 2.033:<GS> ...). However, receipt of such an empty field, if the field is not mandatory, should not result in rejection of the record or issuance of an error message. Rejection will occur, however, when missing or incorrect data would frustrate processing of the transaction. The following list illustrates these types of errors.

Formatted: Left

- A mandatory field is missing in a submitted record set (*e.g.*, NAM is missing in T2CAR) and would result in immediate rejection;
- The format of a mandatory field is incorrect (*e.g.*, an alpha character is discovered in the SOC field) and would result in an attempt to correct the data;

Formatted: Left

Deleted: 002
Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

- The range of data of a mandatory field is incorrect (*e.g.*, a DOB of 18871332 was submitted—century, month, and day are all out of range) and would result in an attempt to correct the data;
- Incorrect data are discovered that cannot be corrected by a service provider and without which the transaction processing cannot proceed will result in the transaction being rejected.

Appendix M lists the current set of error messages that are pertinent to the EBTS user (*i.e.*, IAFIS internal errors are not listed).

Formatted: Left

1.6 Identifying Previous Transactions

The user may wish to refer to previous transactions for the purpose of follow-up or resubmission. The pertinent information is contained in two Type-1 fields, **1.09 Transaction Control Number (TCN)** and **1.10 Transaction Control Reference (TCR)** (See Appendix B).

Formatted: Left

Upon submitting a transaction to the FBI, the submitter places his control number in the TCN field in the Type-1 record. For submissions not requiring reference to a prior transaction, the TCR field is omitted. When the FBI has completed processing the transaction and generates the response, it places the submitter's control number (the received TCN) into the TCR field of the response as a reference number the submitter can use to mate the response with the original submission. The FBI also places its own internal identifier for that transaction (the ICN, or IAFIS Control Number, a 20-character alphanumeric field) in the TCN field of the response.

The TCN in the response can be used by the submitter should he have to reopen the transaction for any purpose. For example, if the FBI rejected the first submission of a user-fee transaction (which the submitter is entitled to resubmit one time free of charge if the rejection was due to poor quality fingerprint images), the user would place this number in the TCR field of the resubmitted transaction to enable the FBI to verify the user's authorization to resubmit at no-charge.

1.7 Data Storage in the IAFIS Database

Data submitted in IAFIS transactions may or may not be stored in the IAFIS database. Data not stored is considered to be user-defined. It is carried in transactions as an aid to the submitter in interpreting or routing the FBI's response to the submission and is returned verbatim to the user. Data stored in IAFIS are always converted to uppercase prior to storage. Therefore, if this data is returned as part of the response to a subsequent submission (or an III inquiry), it may differ (in *case* only) from the originally submitted data.

1.8 Guidance on ORI and CRI Usage

The following description offers some guidance for the use of the CRI field to provide appropriate authorization to perform file maintenance within IAFIS. We develop this scenario by examining how an electronic submission might be formed by a contributor and passed to

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

IAFIS for evaluation. This is intended as an example since there are many other requirements that might influence the final design. Ultimately, the contributors manage the use of the CRI field.

Assume a print is obtained by a local agency, passed to a county agency for processing, and subsequently to the CJIS Systems Agency (CSA) for transmission to the FBI. In such a case, the transmission of ORIs and CRIs might appear as follows:

| | | |
|--------------|----------------------|------------------|
| | | <u>STATE CSA</u> |
| | <u>COUNTY AGENCY</u> | ORI |
| <u>LOCAL</u> | ORI -----> | CRI2 |
| ORI -----> | CRI1 -----> | CRI1 |

When generated at the local level, no CRI need exist since this ORI is the originator. On receipt by the county agency and subsequent transmission to the state CSA, the original ORI is entered as the first instance of the CRI and the county ORI replaces the local ORI in the ORI field. On receipt by the state CSA and for subsequent retransmission to the FBI, the local ORI is retained as CRI1, the county ORI is entered as CRI2, and the ORI of the state CSA is entered in the ORI field. The transaction is then forwarded to the FBI via the CJIS WAN or the Internet. CRI1, the local ORI, is then used as the authority for action and thus retains 'ownership' of the transaction. Then, only CRI1 can modify, cancel, confirm, or delete a latent transaction. In the response, the transaction is sent to the ORI from which it was sent, and it is the responsibility of the state CSA to route it properly to the county agency identified in CRI2. The county agency, in turn, would route the response to the local agency as appropriate.

Formatted: Left

Deleted: 002
 Formatted: Tabs: 6.38", Right +
 Not at 4.63" + 5.72"
 Deleted: APRIL 1, 2008

SECTION 2 SCOPE

This document specifies the file and record content, format, and data codes necessary for the exchange of fingerprint, palmprint, facial, and iris information between federal, state, and local users and the FBI. It provides a description of all requests and responses associated with electronic fingerprint and other identification services. These services include the following:

1. Tenprint Services
2. Latent Services
3. Image Services (Future Capability)
4. Palmprint Services (Future Capability)
5. Photo Services
6. Facial Recognition Services (Future Capability)
7. Iris Services (Future Capability)
8. Rap Back Services (Future Capability)
9. Other Biometric Services (Future Capability)

Formatted: English (U.S.)

The services that are labeled 'Future Capability' are included in this standard to allow users the opportunity to see what is in the future for the FBI. As design moves forward with these initiatives, the TOTs assigned to these services may change along with the mandatory and optional fields.

Tenprint services can be accessed through electronic tenprint submissions and searches. Electronic submissions involve processing and evaluation judgments by FBI personnel. Searches are transactions that interface with automated equipment without human intervention by FBI personnel. Tenprint services also include requests to update current fingerprint images. Latent services are composed of electronic latent submissions handled by FBI latent examiners and automatic searches of the FBI databases. Finally, image requests are used to solicit fingerprint and other types of images stored by the FBI. All transactions and messages are compliant with the ANSI standard for exchange of fingerprint, facial, scars/marks/tattoos, and other biometric information.

The scope of the EBTS has been expanded over previous versions to include additional biometric modes of identification (*e.g.*, facial and iris recognition) in recognition of the rapidly developing biometric identification industry. The most recent update to the ANSI/NIST-ITL 1-2007 standard includes new record types to provide for the sharing of data for these new biometric modalities. The FBI will accept biometric data for these new types of records in accordance with the ANSI/NIST standard. IAFIS will provide identification services for these biometric identification modalities in the near future.

Section 3 gives a description of the types of transactions in the electronic environment. It also establishes error messages, specific compression algorithms for the exchange of fingerprint image information, and image quality assurance methods. Appendix A establishes the priorities of incoming transactions. Appendix B includes field edit specifications and a sample field list for the Type-1 record. Appendix C contains the descriptors and field edit specifications for the

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

XXXX 99, 9999

Type-2 records. Appendix D summarizes tenprint transactions, listing in more detail the Criminal Tenprint Answer Required (CAR) and Search Results, Electronic (SRE) transactions.

Appendix E summarizes Type-2 records for latent transactions. Appendix F provides the image quality specifications for IAFIS equipment. Appendix G is reserved for future use. Appendix H is the field edit specifications and a sample field list for Type-7 records. Appendix I includes Type-2 record samples of each image type of transaction. Appendix J includes field edit specifications and a sample field list for the Type-9 record.

Appendix K includes field edit specifications and sample field lists for the Type-2 (photo) and the Type-10 records, which are defined in the ANSI/NIST-ITL 1-2007 Data Format for the Interchange of Fingerprint, Facial, & Scar Mark & Tattoo (SMT) Information. The ANSI/NIST-ITL 1-2007 defines a standard for transmitting mug shots. Appendix L provides cross-references, both by name and by ID, for all elements, Type-1 through Type-10, and also provides a summary of record set requirements for submission and response TOTs. Appendix M is a listing of error messages that might be received in response to a submission. Appendix N provides definition descriptors and field edits of Type-14 records for civil background checks using flat impressions.

Deleted: recordset

Appendix AC is a listing of acronyms and abbreviations used in this document.

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

Rap Back Delete Flag Request
Rap Back Verification Request

Other Biometric Services (Future Capability)
CBEFF Type-99 records

Details of the individual types of transaction are provided in the paragraphs below.

| IAFIS-DOC-01078-8.1

4

XXXXXX 99, 9999

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

3.1 Electronic Fingerprint Identification Submissions

Electronic fingerprint identification submissions will originate from live-scan booking terminals or card scanners at either the federal, state, or local level. [Figure 1 illustrates the process used for the submission.](#) Local submissions may be processed by a local AFIS and electronically transmitted to a State Identification Bureau for processing. If an identification is made at the state level, an Ident response will be transmitted back to the local agency and, if it is a criterion offense, it is to be forwarded to the FBI. The processing flow for a civil electronic fingerprint identification submission is similar to the criminal submission flow, except that, in the event of state-level Ident response, the submission may still be forwarded to the FBI for processing under federal and/or state statutory authority.

Figure 1 Electronic Fingerprint Identification Submissions

Deleted: Figure 1 Electronic Fingerprint Identification Submissions
Formatted: Caption

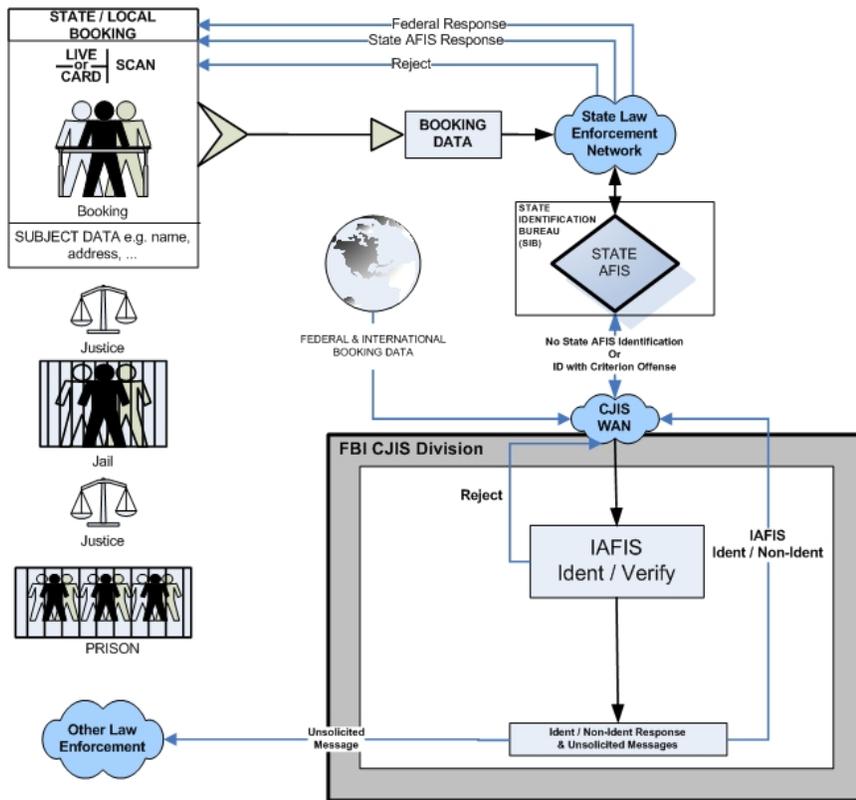


Figure 1 Electronic Fingerprint Identification Submissions

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

If no identification is made, the data will be forwarded via the CJIS WAN to the FBI for processing by IAFIS. Transmitted data will be automatically edited, and a search will be conducted of the FBI's fingerprint files utilizing the III segment's subject search and the AFIS segment's features search capabilities. The identification of fingerprint images of any viable file candidates will be verified by at least one FBI fingerprint examiner. Electronic responses³ from IAFIS to the contributor will be electronically routed via the CJIS WAN through the State Identification Bureau (the ORI). Subsequent routing to the arresting agency is made by the State Ident Bureau using the CRI. Additional copies are routed by the State Identification Bureau using the SCO or other related information (see Appendices B and C for detailed ORI, SCO, and CRI definitions). Responses to submissions or searches by OFOs, tribal, or international agencies will be transmitted directly to the submitting agencies.

Deleted:

Electronic criminal transactions will have a nominal 15-minute turnaround within IAFIS. Exceptional cases, upon agreement with the FBI, will be provided rapid responses ranging from 10 seconds to 10 minutes. Civil transactions, and card-based transactions, once received, will receive processing dependent upon the priority of the types of transaction, ranging from 15 minutes to days. The turnaround times, by type of transaction, are specified in Appendix A. In the future, the Rapid Print Image Search Response may return an SRF value corresponding to the match results of the tenprint search (i.e., red, yellow, or green). Similar to the Tenprint Rap Sheet Response, the Rapid Print Image Search Response will return criminal history (and the most recent full frontal photo if requested and on file) for a red response. Additionally, further information describing the SRF value will be provided to the contributor in the Action to be Taken (ACN) field of the response. No fingerprint images will be returned for either the Tenprint Rap Sheet Response or the Rapid Print Image Search Response.

There are several types of electronic fingerprint identification submissions that will be accepted by the FBI. The particular type of submission is identified in the Type of Transaction (TOT) field in the Type-1 record that is used with each transaction. The following are the TOTs for tenprint submissions:

| <u>TOT</u> | <u>TRANSACTION</u> |
|------------|--|
| CAR | Criminal Tenprint Submission (Answer Required) |
| CNA | Criminal Tenprint Submission (No Answer Necessary) |
| CPDR | Criminal Fingerprint Card Direct Route |
| CPNU | Criminal Fingerprint Card Processing Non-Urgent |
| DSPE | Electronic Disposition Reporting (Future Capability) |
| DOCE | Department Order Channeling Electronic (Future Capability) |
| EMUF | Electronic (In)/Manual (Out) User Fee Submission |

³ Established procedures for sending unsolicited messages to State Identification Bureaus in response to fingerprint cards from Interstate Identification Index (III) participating states will not be affected.

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

| | |
|-------------|---|
| FANC | Federal Applicant (No Charge) |
| FAUF | Federal Applicant User Fee |
| FDSP | Electronic Fingerprint Disposition Submission (Future Capability) |
| FNDR | Federal No Charge Direct Route |
| FVR | Fingerprint Verification Report (Future Capability) |
| NNDR | Non-Federal No Charge Direct Route |
| NFAP | Non-Federal Advanced Payment |
| NFUE | Non-Federal User-fee Expedite |
| NFUF | Non-Federal Applicant User Fee |
| MAP | Miscellaneous Applicant Civil |
| <u>RPIS</u> | <u>Rapid Print Identification Search (Future Capability)</u> |
| <u>ITF</u> | <u>International Terrorist File Request (Future Capability)</u> |
| DEK | Known Deceased |
| DEU | Unknown Deceased |
| MPR | Missing Person |
| AMN | Amnesia Victim |

The FBI's responses to electronic submissions will provide search results or indicate an error via the following TOTs:

| <u>TOT</u> | <u>RESPONSE TRANSACTION</u> |
|-------------|--|
| SRE | Submission Results – Electronic |
| <u>DSPR</u> | <u>Disposition Response (Future Capability)</u> |
| ERRT | Tenprint Transaction Error |
| <u>RPSR</u> | <u>Rapid Print Image Search Response (Future Capability)</u> |
| <u>ITFR</u> | <u>International Terrorist File Response (Future Capability)</u> |

Formatted: English (U.S.)

Formatted: English (U.S.)

3.1.1 Type of Transaction Definitions

3.1.1.1 Criminal Tenprint Submission (Answer Required) (CAR)

This transaction is a criminal arrest fingerprint submission for which the requester desires that a response be returned. It contains ten rolled and four plain impressions of all ten fingers, as well as information relative to an arrest or to custody or supervisory status. Optionally, these transactions may include palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The biographical data and fingerprint images are used to determine potential candidates with criminal records at the FBI. This TOT is also used for an inquiry on a criminal suspect or informant, in which case arrest, custody, or supervisory data may or may not be present (Retention Code set to "N"). Requirements for the use of the Arrest Segment Literal (ASL) and Court Segment Literal (CSL) fields in these cases are discussed in Appendix C. The fingerprint images of those candidates are then compared with those in the submission and an identification or non-identification decision is determined. The criminal records are updated (if the Retention Code is set to "Y"), the photos are added to the file, and a response is returned to

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

the contributor. The response will always contain the Ident/Non-Ident decision and will contain the electronic rap sheet if requested. Table D-1 gives the logical record layout for the CAR TOT. [Edit specifications for the fields that are used may be found in Table C-1.](#)

In the future, criminal submissions will have the ability to request a simultaneous search of other repositories, such as Canada's Real-Time ID System or Department of Homeland Security (DHS) IDENT, submitters will enter the appropriate values for the desired destination in the Name of Designated Repository (2.098 NDR) field in the Type-2 record.

Deleted: ¶

3.1.1.2 Criminal Tenprint Submission (No Answer Necessary) (CNA)

This transaction is a criminal arrest fingerprint submission for which the requester desires that no response be transmitted back. Otherwise, it is identical to the CAR request described above, containing ten rolled and four plain impressions, arrest, custody or supervisory status data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. Processing is also identical except that no response is returned. However, a communication protocol acknowledgment will be returned to the contributor to confirm receipt of the transaction. The Retention Code for this transaction must be set to "Y." The CNA TOT is summarized in Table D-3. [Edit specifications for the fields that are used may be found in Table C-1.](#)

Deleted: i

Deleted: s

3.1.1.3 Criminal Fingerprint Card Direct Route (CPDR)

This transaction is a criminal arrest fingerprint submission that will be directly routed to a CJIS internal log application for processing. The submission contains ten rolled and four plain impressions, arrest data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. It is identical to the CAR request described above with the inclusion of a mandatory TSR field. IAFIS will ensure the required EBTS fields and a Type of Search Requested (TSR) of "C" are present; otherwise, the submission will be rejected. If the TSR of "C" is present and the TOT is other than CPDR, NNDR, or FNDR, the submission will be rejected. The CPDR TOT is summarized in Table D-3. [Edit specifications for the fields that are used may be found in Table C-1.](#)

Formatted: Font: 12 pt

In the future, criminal submissions will have the ability to request a simultaneous search of other repositories, such as Canada's Real-Time ID System or DHS IDENT, submitters will enter the appropriate values for the desired destination in the Name of Designated Repository (2.098 NDR) field in the Type-2 record.

Note: CPDR is a limited-use TOT that requires coordination with FBI prior to use.

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.1.1.4 Criminal Fingerprint Card Processing Non-Urgent (CPNU)

This transaction is a criminal arrest fingerprint submission that will differ from urgent criminal transactions in response time and in online (response) notifications. The submission contains ten rolled and four plain impressions, arrest data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. Processing is identical to the CAR request described above except, instead of receiving a 15-minute response, the response due time is set to 30 days to prevent prioritization ahead of the urgent criminal or civil submissions. Internal FBI CPNU submissions may contain the TSR of "H," which will allow the online responses triggered due to the positive identification against a Want or Sex Offender Registry (SOR) entry to be suppressed. Currently, CPNU submissions from external contributors do not have the option to use a TSR of "H"; however, the use of CPNU for criminal submissions not requiring an immediate response is available. The CPNU TOT is summarized in Table D-3. [Edit specifications for the fields that are used may be found in Table C-1.](#)

Formatted: Keep lines together

Formatted: Keep with next, Keep lines together

Formatted: Font: 12 pt

In the future, criminal submissions will have the ability to request a simultaneous search of other repositories, such as Canada's Real-Time ID System or DHS IDENT, submitters will enter the appropriate values for the desired destination in the Name of Designated Repository (2.098 NDR) field in the Type-2 record.

Note: CPNU is a limited-use TOT that requires coordination with FBI prior to use.

3.1.1.5 Department Order Channeling Electronic (DOCE) (Future Capability to be implemented in the F.9.0 IAFIS Build)

This transaction deals with 'Individuals seeking their own criminal history record pursuant to DO 556-73.' The Channeling Agencies will be responsible for the verification/authentication of the individual requesting the criminal history information from the IAFIS. The FBI will only accept the submissions and process them as current electronic, civil transactions from Channeling Agencies. There will be no requester paperwork versus fingerprint card verification/authentication performed via the FBI. An electronic response should be sent to the Channeling Agency indicating ident, non-ident, or rejection and a rapsheet, if the response is ident. The DOCE TOT is summarized in Table D-3. [Edit specifications for the fields that are used may be found in Table C-1.](#)

3.1.1.6 Electronic Disposition Reporting (DSPE) (Future Capability)

This transaction gives the requester an electronic option to submit dispositional information. The Court Segment Literal (CSL) or dispositional data may be obtained from the arresting agency, the court system, the penal system, or any other local, state, or federal entity that may render final adjudication in a criminal case. The DSPE may be used to submit from one (1) to forty (40) CSL transactions per date of arrest (DOA). An electronic response (DSPR) will be sent to the requester.

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.1.1.7 Electronic In/Manual Out (EMUF)

These submissions are for non-criminal justice purposes in which the contributor is charged a fee whose response is manual instead of electronic. The submission contains either ten rolled and four plain impressions or three identification flat impressions, biographic descriptor data, optional palmprint and iris images, and up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The palmprint and iris images and the photos are allowed only if the retention field (2.005 RET) is set to "Y." The EMUF TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1. See Section 1.6 for a discussion of the use of TCN and TCR in no-charge resubmission of user-fee submissions that the FBI has rejected. Such resubmissions are allowed only when the fingerprint image quality of the original submission was unacceptable. When the FBI completes processing, it will print a Non-Ident or Ident response report and mail it to the requester.

Deleted: i
Deleted: s
Deleted: also
Deleted: The EMUF TOT is summarized in Table D-3.

Note: EMUF is a limited-use TOT that requires coordination with FBI prior to use.

3.1.1.8 Federal Applicant (No Charge) (FANC)

This transaction pertains to an individual who is fingerprinted in connection with applying for criminal justice employment with the federal government. The submission contains either ten rolled and four plain impressions or three identification flat impressions, biographic descriptor data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The palmprint and iris images and the photos are allowed only if the retention field (2.005 RET) is set to "Y." When this TOT is used, there is no charge assessed to the contributor. Federal agencies that are considered "User Fee" contributors must not use this TOT, but use "FAUF" instead (see description below). The FANC TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

3.1.1.9 Federal Applicant User Fee (FAUF)

These submissions come from: (1) any of the branches of the U. S. military in connection with individuals enlisting or being considered for Officers' Candidate School; and (2) federal agencies in connection with employment, security updates, or contract personnel. The submission contains either ten rolled and four plain impressions or three identification flat impressions (see Appendix N), biographic descriptor data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The palmprint and iris images and the photos are allowed only if the retention field (2.005 RET) is set to "Y." The FAUF TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1. See Section 1.6 for a discussion of the use of TCN and TCR in no-charge resubmission of user-fee submissions that the FBI has rejected. Such resubmissions are allowed only when the fingerprint image quality of the original submission was unacceptable.

Deleted: i
Deleted: s
Deleted: also
Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

3.1.1.10 Electronic Fingerprint Disposition Submission (FDSP) (Future Capability)

This transaction will use the same process as the DSPE above, except it will have the AMP and fingerprint images as mandatory fields. A comparison will be done between the FNU/UCN supplied and the fingerprint images provided to determine positive identification. Any disposition submission that establishes a new FBI record or any disposition submission where submission data matches the existing FBI record will be disseminable in responses from the FBI. An electronic response (DSPR) will be sent to the requestor.

3.1.1.11 Federal No Charge Direct Route (FNDR)

This transaction is an applicant fingerprint card submission from a federal agency that will be directly routed to a CJIS internal log application for processing. The submission contains either ten rolled and four plain impressions or three identification flat impressions, biographic descriptor data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The palmprint and iris images and the photos are allowed only if the retention field (2.005 RET) is set to "Y." The FNDR is similar to the FANC transaction with the addition of a mandatory TSR field. IAFIS will ensure the required EBTS fields and a TSR of "C" are present; otherwise the submission will be rejected. If the TSR of "C" is present and the TOT is other than CPDR, NNDR, or FNDR, the submission will be rejected. The FNDR TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Formatted: Font: 12 pt

Note: FNDR is a limited-use TOT that requires coordination with FBI prior to use.

Deleted: ¶

3.1.1.12 Non-Federal No Charge Direct Route (NNDR)

This transaction is an applicant fingerprint card submission from a non-federal agency that will be directly routed to a CJIS internal log application for processing. The submission contains either ten rolled and four plain impressions or three identification flat impressions, biographic descriptor data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The palmprint and iris images and the photos are allowed only if the retention field (2.005 RET) is set to "Y." The NNDR is similar to the FANC transaction with the addition of a mandatory TSR field. IAFIS will ensure the required EBTS fields and a TSR of "C" are present; otherwise the submission will be rejected. If the TSR of "C" is present and the TOT is other than NNDR, FNDR, or CPDR, the submission will be rejected. The NNDR TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

Note: NNDR is a limited-use TOT that requires coordination with FBI prior to use.

3.1.1.13 Non-Federal Advanced Payment (NFAP)

These submissions are for non-criminal justice purposes in which the contributor is charged a fee in advance. The submission contains either ten rolled and four plain impressions or three identification flat impressions. Examples of the types of contributors for this TOT are federal citizenship and immigration services (such as training candidate check programs). The purpose for submitting such requests is to ascertain whether individuals who have applied for training through the contributor organizations have any past criminal histories. The NFAP TOT is summarized in Table D-3. Edit specifications for the fields NFAP uses may be found in Table C-1. See also Section 1.6 for a discussion of the use of TCN and TCR in no-charge resubmission of user-fee submissions that the FBI has rejected. Such resubmissions are allowed only when the fingerprint image quality of the original submission was unacceptable.

Formatted: Keep lines together
Formatted: Keep with next, Keep lines together

Note: NFAP is a limited-use TOT that requires coordination with FBI prior to use.

3.1.1.14 Non-Federal Applicant User Fee (NFUF)

These submissions are for non-criminal justice purposes in which the contributor is charged a fee. The submission contains either ten rolled and four plain impressions or three identification flat impressions, biographic descriptor data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The palmprint and iris images and the photos are allowed only if the retention field (2.005 RET) is set to "Y." Examples of the types of contributors of this type of transaction are federal and state banking institutions and regulatory agencies (such as stock exchanges, bankers' associations, securities dealers, Nuclear Regulatory Commission, Securities and Exchange Commission, racing or gaming control boards, etc.). Their purpose for submitting such requests is to ascertain whether individuals who have applied for training through the contributor organizations have any past criminal histories. The NFUF TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1. See also Section 1.6 for a discussion of the use of TCN and TCR in no-charge resubmission of user-fee submissions that the FBI has rejected. Such resubmissions are allowed only when the fingerprint image quality of the original submission was unacceptable.

Deleted: i
Deleted: s

3.1.1.15 Miscellaneous Applicant Civil (MAP)

These no-charge submissions are for non-federal law enforcement and criminal justice employment. The submission contains either ten rolled and four plain impressions or three identification flat impressions, biographic descriptor data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The palmprint and iris images and the photos are allowed only if the retention field (2.005 RET) is set to "Y." The MAP TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s
Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

3.1.1.16 Known Deceased (DEK)

Deleted: ¶

These transactions are submitted for a deceased individual whose identity is known to the contributor. The submission contains either ten rolled and four plain impressions or three identification flat impressions, and optionally palmprint and iris images along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. If the fingerprints are determined to be identical to those of a subject in the FBI's criminal files, the subject's FBI record will be marked as deceased. The ICO field in this submission may be filled with the text "DECEASED." The DEK TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

Deleted: ¶

3.1.1.17 Unknown Deceased (DEU)

This transaction is submitted with fingerprints taken from an individual who was deceased at that time but whose identity was not known to the contributor. The submission contains either ten rolled and four plain impressions or three identification flat impressions, and optionally palmprint and iris images along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. If the fingerprints are determined to be identical to those of a subject in the FBI's criminal files, the subject's FBI record will be marked as deceased and the contributor will be notified of the results. Should no identification result from a search of the criminal file, a search of the civil file will be performed. The subject will be added to the criminal file when no identification results, in order to be identified with missing person's reports. The DEU TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

3.1.1.18 Missing Person (MPR)

These non-criminal submissions pertain to persons reported as missing. The submission contains either ten rolled and four plain impressions or three identification flat impressions and optionally up to 4 photos of the subject. Their submission causes a search of the FBI files and may result in the placement of a "stop" in FBI automated files to create the possibility of a future fingerprint submission (of any type) hitting against the original set of fingerprints and establishing the person's whereabouts. Should no identification result from a search of the criminal file, a search of the civil file will be performed. These subjects are added to the Criminal File when no identification is made to an existing record. The Action to be Taken (ACN) field of the response will indicate if a "stop" has been established. The ICO field in this submission may be filled with the text "MISSING PERSON." The MPR TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: an unlimited number of photos

Deleted: These subjects are added to the Criminal File.

Deleted: i

Deleted: s

3.1.1.19 Amnesia Victim (AMN)

These non-criminal submissions pertain to persons known to have amnesia who are unaware of their own identity. The submission contains either ten rolled and four plain impressions or three identification flat impressions, and optionally up to 4 photos of the subject.

Deleted: an unlimited number of photos

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008


The submission causes a search of the FBI files and may result in the placement of a “stop” in FBI automated files to create the possibility of a future fingerprint submission (of any type) hitting against the original set of fingerprints and establishing the person’s identity. Should no identification result from a search of the criminal file, a search of the civil file will be performed. These subjects are added to the Criminal File when no identification is made to an existing record. The ACN field of the response will indicate if a “stop” has been established. The ICO field in this submission may be filled with the text “AMNESIA VICTIM.” The AMN TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

3.1.1.20 Major Case Print Collection in Conjunction with Tenprint Submissions

In the future, Tenprint Identification submissions that also include FBI-approved palmprint and supplemental finger/palmprint cards are referred to as Major Case Print Collections (to be differentiated from Major Case Print Submissions in connection to latent case investigations). Best practices for a Major Case Print Collection are defined as one FBI Standard Fingerprint Card, two FBI Standard Palmprint Cards, and two FBI Standard Supplemental Finger/Palmprint Cards, for a total of five cards per subject. ANSI/NIST-ITL 1-2007 provides the finger position codes and maximum image sizes. The FGP field of the Type-14 image record shall contain “19” from Table 12 finger position code & maximum image dimensions, indicating Major Case Prints. Figure 2 represents the FBI Standard Tenprint Card, FD-249 (reverse not shown).

Deleted: T
Deleted: , is represented below

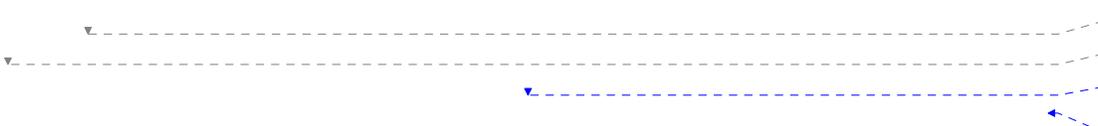

Deleted: ¶
Deleted: ¶
Deleted: Figure 3.1.1.20-1 FBI Standard Fingerprint Card (FD-249)
Formatted: Caption, Centered, Don't keep with next, Don't keep lines together

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

Figure 2 FBI Standard Fingerprint Card (DF-249)

| | | | | | | | | | | | |
|--|--|--|--|------------------------|--|------------|------|---|--------|-------------|------|
| LEAVE BLANK | | CRIMINAL | | (STAPLE HERE) | | | | LEAVE BLANK | | | |
| STATE USAGE | | SUBMISSION | | APPROXIMATE CLASS | | AMPUTATION | | SCAR | | STATE USAGE | |
| STATE USAGE | | LAST NAME, FIRST NAME, MIDDLE NAME, SUFFIX | | | | | | | | | |
| SIGNATURE OF PERSON FINGERPRINTED | | | | SOCIAL SECURITY NO. | | | | LEAVE BLANK | | | |
| ALIASES/MAIDEN LAST NAME, FIRST NAME, MIDDLE NAME, SUFFIX | | | | | | | | | | | |
| FBI NO. | | STATE IDENTIFICATION NO. | | DATE OF BIRTH MM DD YY | | SEX | RACE | HEIGHT | WEIGHT | EYES | HAIR |
| 1. R. THUMB | | 2. R. INDEX | | 3. R. MIDDLE | | 4. R. RING | | 5. R. LITTLE | | | |
| 6. L. THUMB | | 7. L. INDEX | | 8. L. MIDDLE | | 9. L. RING | | 10. L. LITTLE | | | |
| LEFT FOUR FINGERS TAKEN SIMULTANEOUSLY | | | | L. THUMB | | R. THUMB | | RIGHT FOUR FINGERS TAKEN SIMULTANEOUSLY | | | |

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

Figure 3 and Figure 4 contain the front and reverse sides of the FBI Standard Palmprint Card, FD-884.

Deleted: The
Deleted: is represented below

Figure 3 FBI Standard Palmprint Card (FD-884) Front


Formatted: Caption, Centered

Deleted: Figure 3.1.1.20-2 FBI Standard Palmprint Card (FD-884) Front

Formatted: Caption, Centered

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

Figure 4 FBI Standard Palmprint Card (FD-884) Reverse

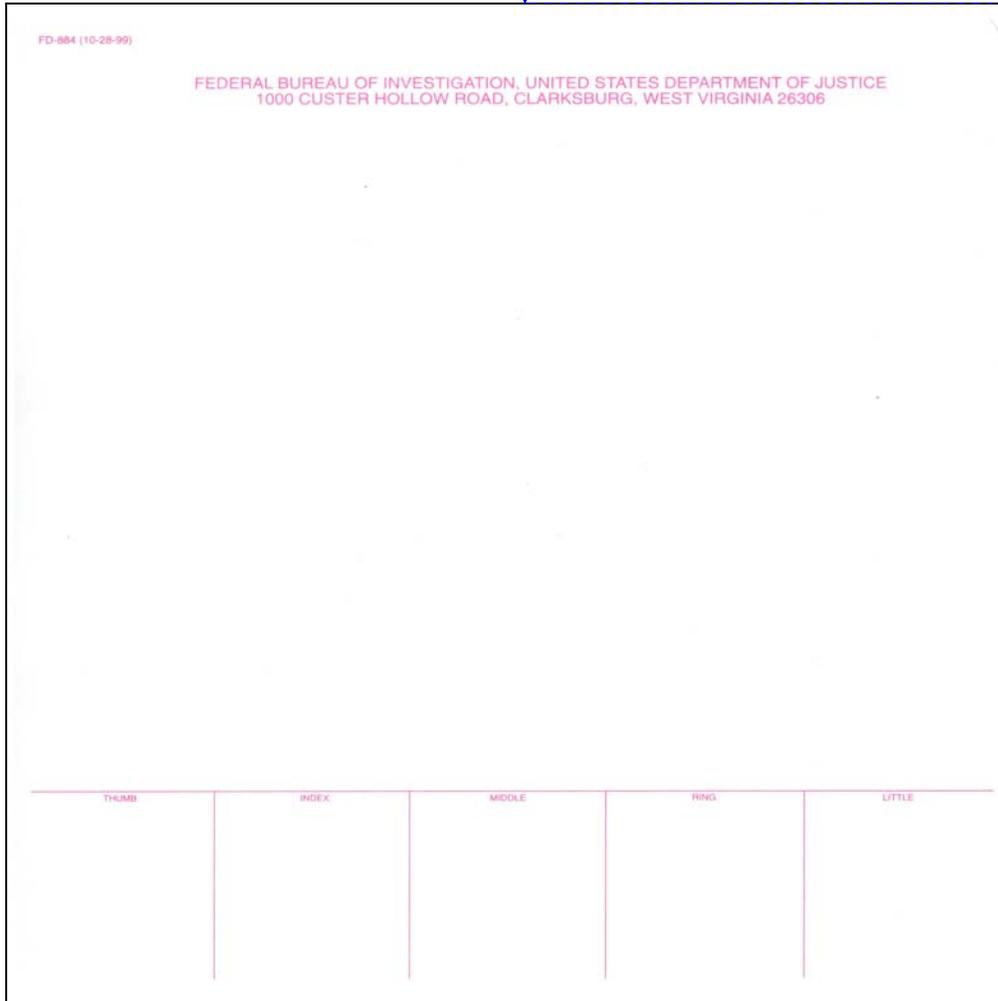

Deleted: Figure 3.1.1.20-3 FBI Standard Palmprint Card (FD-884) Reverse

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008


Figure 5 and Figure 6 illustrate the newly defined FBI Standard Supplemental Finger/Palmprint Cards, FD-884A. It will contain additional areas of friction ridge capture, including joint prints (distal, medial, and proximal), rolled finger tips, and rolled thenar area for each hand as shown in the images below.

Deleted: The
Deleted: ,

Figure 5 FBI Standard Supplemental Finger/Palmprint Card - Front

Formatted: Caption, Centered

| | | | | | | | | | | | |
|--|--|----------------------|-------------------------------------|------------------------------|--|-------------|-----------|------------|-------------------|------------|--|
| IDENTIFICATION NO. | | LAST NAME | | FIRST NAME | | MIDDLE NAME | | SID NUMBER | | FBI NUMBER | |
| DATE PRINTED | | | SIGNATURE OF OFFICIAL TAKING PRINTS | | | | ID NUMBER | | CONTRIBUTOR (ORI) | | |
| <input type="checkbox"/> LEFT <input type="checkbox"/> RIGHT 2h x 2.5w | | 3h x 1w INDEX TIP | | 4h x 4.5w | | | | | | | |
| THUMB TIP 1h x 2.5w | | | | | | | | | | | |
| THUMB 4h x 3.5w | | | | INDEX THENAR 3h x 4.5w | | | | | | | |




Deleted: Figure 3.1.1.20-4 FBI Standard Supplemental Finger/Palmprint Card (FD-884A) Front¶

Deleted: ¶
Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

Figure 6 FBI Standard Supplemental Finger/Palmprint Card - Reverse

Formatted: Caption, Centered, Tabs: Not at 0"

Deleted: Figure 3.1.1.20-5 FBI Standard Supplemental Finger/Palmprint Card (FD-884A) Reverse

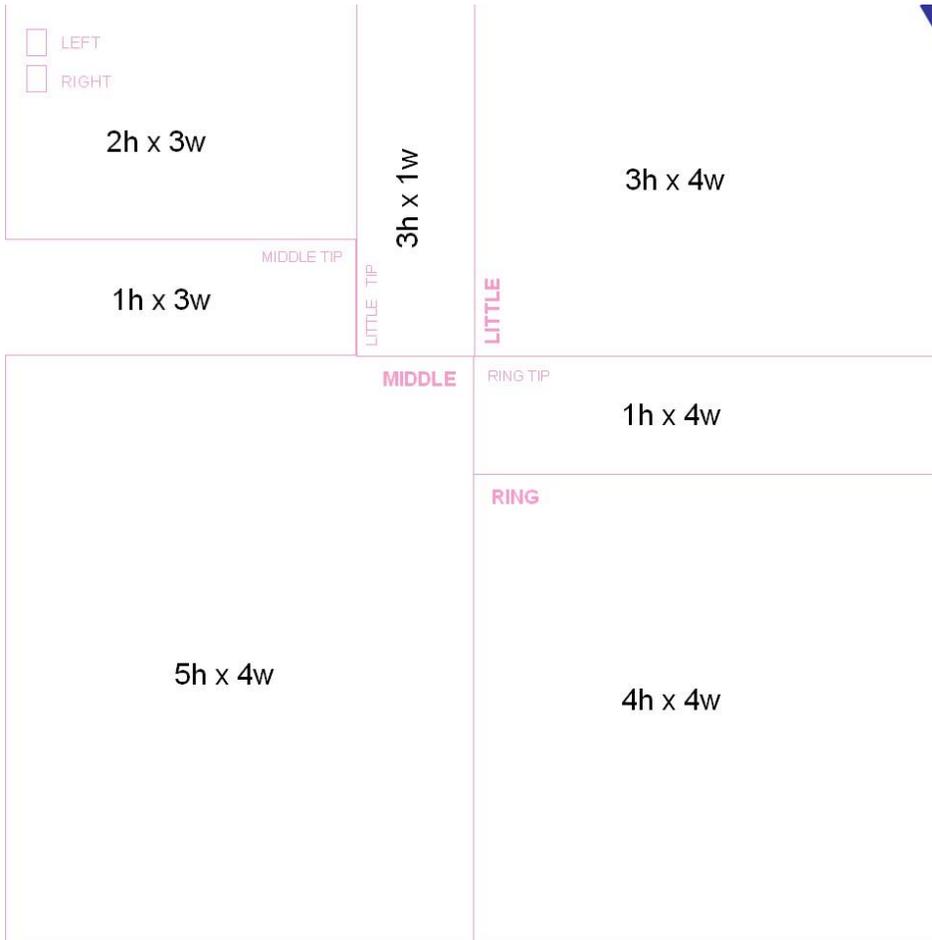

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

The table below lists the Major Case Print Codes to be used in the Type-13 and -14 records.

Table 3-0 Major Case Print Codes

| Type of Major Case Print Image | Image Code |
|-------------------------------------|-----------------------|
| Entire Joint Image | EJI |
| Rolled Tip | TIP |
| Full Finger View | FVx $x = \{1,2,3,4\}$ |
| Proximal, Distal, or Medial Segment | PRX, DST, MED |

The types of Major Case Print images are further defined as:

- Joint Prints (later broken down into distal, medial, and proximal)
 - *Rolled Joint Print: a single recording of the friction ridge skin on the distal, medial (except thumbs), and proximal areas of each finger. This type of impression is taken in one motion, similar to the taking of a rolled fingerprint impression.*
- Rolled Tips
 - *A single recording of the friction ridge skin on the tip of the end joint of a finger. This type of impression is taken by placing the end joint of the finger on one side and rolling the finger across the tip such that the fingernail is in constant contact (or near constant contact) with the sheet of paper until the other side of the finger is reached.*
- Rolled Thenar
 - *The large cushion of the palm located at the base of the thumb opposite of the Writer's Palm or Hypothenar.*

The rolled joint segments are labeled in [Figure 7](#). In the figure, image 1 is the rolled middle finger, images 2 and 4 are the pressed sides of the middle finger, and 3 is the pressed surface of the middle finger.

Deleted: the image below

Deleted: where


Formatted: Caption, Centered

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

Figure 7 Distal, Medial, and Proximal Joints

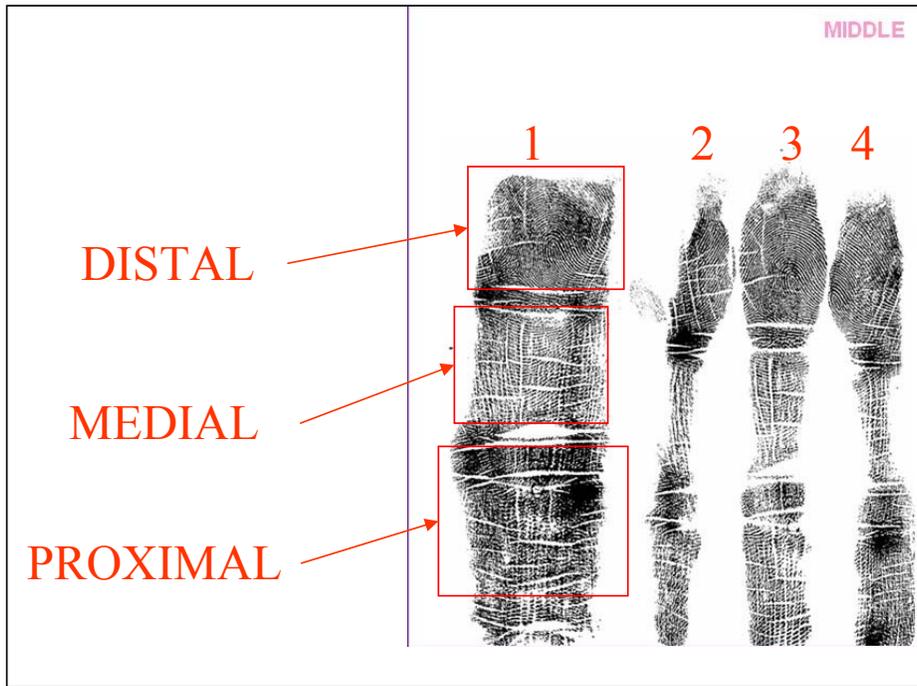

Deleted: Figure 3.1.1.20-6 Distal, Medial and Proximal Joints

Deleted: ¶
¶
<sp>¶
¶
¶

The image records of the entire joint image (EJI) are contained in Type-14 records. Offsets to the locations of image segments containing the full finger view, proximal, distal, or medial areas are included with the image records further defined in the Type-14 record field specifications.

3.1.1.21 Non-Federal User-fee Expedite (NFUE)

These non-federal civil applicant submissions are fee-based, high-priority fingerprint transactions that require an expedited search and response. The submission contains either ten rolled and four plain impressions or three identification flat impressions (see Appendix N), biographic descriptor data, optional palmprint and iris images, along with up to 4 photos of the subject. In the future, these transactions will be able to optionally include any other major case print information. The palmprint and iris images and the photos are allowed only if the retention field (2.005 RET) is set to "Y." The NFUE TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1. See Section 1.6 for a discussion of the use of TCN and TCR in no-charge resubmission of user-fee submissions that the FBI has rejected. Such resubmissions are allowed only when the fingerprint image quality of the original submission was unacceptable.

Deleted: i

Deleted: s

Deleted: also

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.1.1.22 Rapid Print Image Search (RPIS) and Response (RPSR) (Future Capability)

This transaction is provided by the FBI to enable rapid fingerprint searches implemented as part of the FBI's Repository for Individuals of Special Concern (RISC). RISC provides the capability to perform a rapid fingerprint search (with from two to ten rolled or flat fingerprint images) against a special file containing the most wanted individuals, including, among others, identified terrorists, wanted aliens, or other international subjects identified as a threat to the United States. Rapid Print Image Search (RPIS) transactions will provide a 10-second or less response to searches from authorized agencies; the response transaction (RPSR) consists of a red/yellow/green-light indicator corresponding to the match results against IAFIS tenprint repositories. Red indicates a hit has been made against an identified threat subject. Green indicates there are no disseminable hits. Yellow indicates a need for further investigation. As stated in paragraph 3.1, for a red light response, a criminal history will be returned for any candidates (similar to TPRR), as well as the most recent full frontal photo if requested, on file and disseminable. Additionally, further information describing the SRF value will be provided to the contributor in the Action to be Taken (ACN) field of the response.

Note: RPIS is a limited-use TOT that requires coordination with FBI prior to use.

3.1.1.23 International Terrorist File Request (ITF) and Response (ITFR) (Future Capability)

Similar to a RPIS request, an ITF request provides participating International Agencies with the capability to search the RISC Repository. However, the ITF request is different from a RPIS request in the following ways: allows for multi-tiered enrollment into the RISC repository, does not provide a "lights out" search, forwards the ITF request to other participating International Organizations, and provides a positive or negative Identification decision.

Note: ITF is a limited-use TOT that requires coordination with FBI prior to use.

3.1.1.24 Submission Results – Electronic (SRE)

This transaction is returned by the FBI in response to tenprint submissions. The response will always contain the Ident/Non-Ident decision and will contain the electronic rap sheet if requested. Table 3-1 describes which NAM, FBI number, and SID are returned in the SRE for Criminal, Civil and Humanitarian submissions, and for Non-Ident and Ident results. A non-matching NAME is returned in the electronic rap sheet (ERS) if one was requested. The following fields, which are not stored in IAFIS, are always returned exactly as submitted: ATN, SCO, EAD, OCP, RES, and TAA. A single electronic response will be sent to the contributor through the State Identification Bureau via the CJIS WAN. In the case that circumstances delay processing an EBTS request, the requestor will receive a preliminary electronic response coded as a Non-Ident with an ERS. The ERS will contain a report explaining results are not available due to a delay. When the FBI completes processing, it will print a Non-Ident or Ident response

Formatted: Right: 0", Line spacing: single

Deleted: 2

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

report and mail it to the requestor. Table D-2 gives the logical record layout for the SRE TOT. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

In the future, criminal submissions which denote Canada's RTID System as a search destination, the submitter will receive two SRE transactions. The first will contain the results of the IAFIS search. The second will contain the results of the Canada RTID search. The TCR field in the Type-1 header record of the second response will contain the TCN value from the Type-1 header record of the first response to enable correlation of the two responses. The Type-2 record of the second SRE will also contain the unique identifier and biographic data of a subject in the RTID repository if there is a hit.

In the future, criminal submissions may also be cascaded to other external databases such as DoD ABIS, DHS IDENT/US-VISIT, etc., via use of multiple values of the Type-2 record field NDR (see Appendix C description). Responses returned within the specified response times for the IAFIS transactions will be combined into a single response. Responses that would result in a delay will be returned in a separate response similar to a submission searching the Canada system.

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

Table 3-1. Values of NAM, FBI and SID Returned in the SRE

| Type of Submission | Result | Value of Returned Field | | | Special Exceptions |
|--------------------------------|----------------------|-------------------------|------------|---------------|--------------------|
| | | Name | FBI | SID | |
| Criminal, No FBI Submitted | Non-Ident Non-Retain | NAM Submitted | None | SID Submitted | |
| Criminal, No FBI Submitted | Non-Ident Retain | NAM Submitted | Master FBI | SID Submitted | |
| Criminal, No FBI Submitted | Ident Non-Retain | Master NAM | None | Master SID | |
| Criminal, No FBI Submitted | Ident Retain | Master NAM | Master FBI | Master SID | |
| Criminal, FBI Submitted | Non-Ident Non-Retain | NAM Submitted | None | Submitted SID | STD in RAP SHEET |
| Criminal, FBI Submitted | Non-Ident Retain | NAM Submitted | Master FBI | Submitted SID | STD in RAP SHEET |
| Criminal, FBI Submitted | Ident Non-Retain | Master NAM | Master FBI | Master SID | STD in RAP SHEET |
| Criminal, FBI Submitted | Ident Retain | Master NAM | Master FBI | Master SID | STD in RAP SHEET |
| Civil, No FBI Submitted | Non-Ident Non-Retain | NAM Submitted | None | None | |
| Civil, No FBI Submitted | Non-Ident Retain | NAM Submitted | CRN | None | |
| Civil, No FBI Submitted | Ident Non-Retain | Master NAM | Master FBI | Master SID | |
| Civil, No FBI Submitted | Ident Retain | Master NAM | Master FBI | Master SID | |
| Civil, FBI Submitted | Non-Ident Non-Retain | NAM Submitted | None | None | STD in RAP SHEET |
| Civil, FBI Submitted | Non-Ident Retain | NAM Submitted | CRN | None | STD in RAP SHEET |
| Civil, FBI Submitted | Ident Non-Retain | Master NAM | Master FBI | Master SID | STD in RAP SHEET |
| Civil, FBI Submitted | Ident Retain | Master NAM | Master FBI | Master SID | STD in RAP SHEET |
| Humanitarian, No FBI Submitted | Non-Ident | NAM Submitted | Master FBI | None | |
| Humanitarian, No FBI Submitted | Ident | Master NAM | Master FBI | None | |
| Humanitarian, FBI Submitted | Non-Ident | NAM Submitted | Master FBI | None | STD in RAP SHEET |
| Humanitarian, FBI Submitted | Ident | Master NAM | Master FBI | None | STD in RAP SHEET |

Under certain circumstances, the SRE will contain Special Table Data (STD). For example, this would be included in a Non-Ident Report (NIDR) if a Universal Control Number (UCN) was submitted. It would be included in an Ident Report (IDRR) if a submitted UCN did not match the UCN in the Master File for subject. It would be included in an IDRR or NIDR, as appropriate, if the Master File UCN was marked expunged, deleted, or consolidated.

3.1.1.2.5 Disposition Response (DSPR) (Future Capability)

This transaction is returned by the FBI in response to dispositional type related submissions (DSPE). The response will be based on whether the transaction is processed as submitted. The DSPR will contain an IAFIS identifying number (TCN) from the submission, the submitted biographical data, and response information. The response information may be "Record Updated" if the record is successfully updated with the submitted CSL, "Manual Processing Required" if subsequent analysis of the submitted CSL is necessary, or "Rejected"

- Deleted: ¶
- Formatted ... [1]
- Formatted ... [2]
- Formatted ... [3]
- Formatted ... [4]
- Formatted ... [5]
- Formatted ... [6]
- Formatted ... [7]
- Formatted ... [8]
- Formatted ... [9]
- Formatted ... [10]
- Formatted ... [11]
- Formatted ... [12]
- Formatted ... [13]
- Formatted ... [14]
- Formatted ... [15]
- Formatted ... [16]
- Formatted ... [17]
- Formatted ... [18]
- Formatted ... [19]
- Formatted ... [20]
- Formatted ... [21]
- Formatted ... [22]
- Formatted ... [23]
- Formatted ... [24]
- Formatted ... [25]
- Formatted ... [26]
- Formatted ... [27]
- Formatted ... [28]
- Formatted ... [29]
- Formatted ... [30]
- Formatted ... [31]
- Formatted ... [32]
- Formatted ... [33]
- Formatted ... [34]
- Formatted ... [35]
- Formatted ... [36]
- Formatted ... [37]
- Deleted: 3
- Deleted: 002
- Formatted ... [38]
- Deleted: APRIL 1, 2008

and the reason for rejection listed. The response information will be contained in the Action to be Taken field (2.071 ACN). Rejections will be via the ERRT TOT (see below).

3.1.1.2.6 Fingerprint Verification Report (FVR) (Future Capability)

This transaction is used to verify the identity of a subject against a known Universal Control Number (UCN) in the FBI CJIS files. Submission will include a quoted UCN and may include from two to ten fingerprint images, either flat or rolled. If the quoted UCN is not found, an error message (ERRT) will be returned saying "Quoted UCN not found." If the UCN is found but not identified, a Non-Ident Response will be returned. If the submitted images are identified against the quoted UCN, an Ident Response will be returned including a current RAP sheet.

3.1.1.2.7 Tenprint Transaction Error (ERRT)

This transaction is returned by the FBI to indicate a transaction error. It includes a message field (MSG) indicating the type of error detected. Error responses are described in Section 3.8. The ERRT TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1. Currently defined error messages are detailed in Appendix M.

3.1.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

3.2 Investigative Fingerprint Searches

To conduct an investigative tenprint search of the FBI's database, the sending agency will electronically transmit fingerprint images and classification information as required by the AFIS/FBI (i.e., the AMP, when needed) or user-extracted fingerprint characteristics. Fingerprint characteristics include classification, fingerprint features, and any other derived data required by AFIS/FBI. If the originator is a local agency, the request will go through their State Identification Bureau. The subsequent FBI search will be conducted automatically with no additional manual editing or processing. If candidates are identified, no identification decision is made by the FBI. Instead, up to 25 candidates' FBI numbers are returned to the transmitting agency along with fingerprint images from the highest scoring candidate. The user can request specific finger images, up to all 14 fingerprint images, via the Fingerprint Number(s) Requested (FNR) field. This process differs from electronic tenprint submission processing in that there is no manual intervention on the part of the FBI.

The sender must designate the TOT in the Type-1 record to specify the type of search request. The following list of TOTs is applicable to tenprint searches transmitted to the FBI:

- Deleted: 4
- Deleted: 5
- Deleted: i
- Deleted: s
- Deleted: Submissions: The types and quantities of logical records required in an electronic tenprint submission are as follows:¶
- ¶
- . X . 1 Type-1 Header Record¶
- . X . 1 Type-2 Record¶
- ¶
- . Nominally either,¶
- . X . For criminal justice purposes (e.g., CAR, CNA, CPDR, CPNU, and optionally DSPE)¶
- ¶
- . X . 14 Type-4 or Type-14 records as follows:¶
- . . . 10 Rolled Impressions¶
- . . . 4 Sets of Plain Impressions¶
- ¶
- X . 0-20 Type-13 Supplemental Finger/Palmprint images (Future Capability)¶
- ¶
- X . 0-8 Type-15 Palmprint Records¶
- ¶
- X . 0-4 Type-10 Records containing photos¶
- ¶
- X . 0-2 Type-17 Iris image records¶
- ¶
- X . 0-N Type-99 CBEFF records (Future Capability)¶
- ¶
- Or¶
- ¶
- For non-criminal justice purposes (e.g., FAUF, FANC, FNDR, NFUF, NFAP, NNDR, MAP) and with FBI coordination and authorization,¶
- Either,¶
- . X . 14 Type-4 or Type-14 records as follows:¶
- . . . 10 Rolled Impressions¶
- . . . 4 Sets of Plain Impressions¶
- ¶
- . Or,¶
- X . 3 Type-14 records (refer to Appendix N) as follows:¶
- 2 Plain Simultaneous Four Finger Impressions¶
- 1 Plain Left and Right Thumb Impression¶
- ¶
- . Or, for FVR,¶
- ¶
- . X . 2-10 Type-4 or Type-14 flat [39]
- Deleted: 002
- Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
- Deleted: APRIL 1, 2008

| | |
|------------|--|
| <u>TOT</u> | <u>Transaction</u> |
| TPIS | Tenprint Fingerprint Image Searches |
| TPFS | Tenprint Fingerprint Features Searches |
| TPRS | Tenprint Rap Sheet Request |


Formatted: Keep with next, Keep lines together

A hierarchical approach to tenprint searches must be adhered to (*i.e.*, for TPIS and TPFS). Searches submitted by local agencies must be processed by the local AFIS (if available) and electronically transmitted to a state AFIS (if available) before submitting a search to the FBI. If an identification decision is made at any of the previous levels, the Ident response will be transmitted to the originating agency and there will be no further processing of the request at a higher level.

Deleted: RPIS Rapid Print Image Search (Future Capability)¶


The processing flow for tenprint searches (TPIS/TPFS) is shown in [Figure 8](#).

Figure 8 Investigative Fingerprint Searches

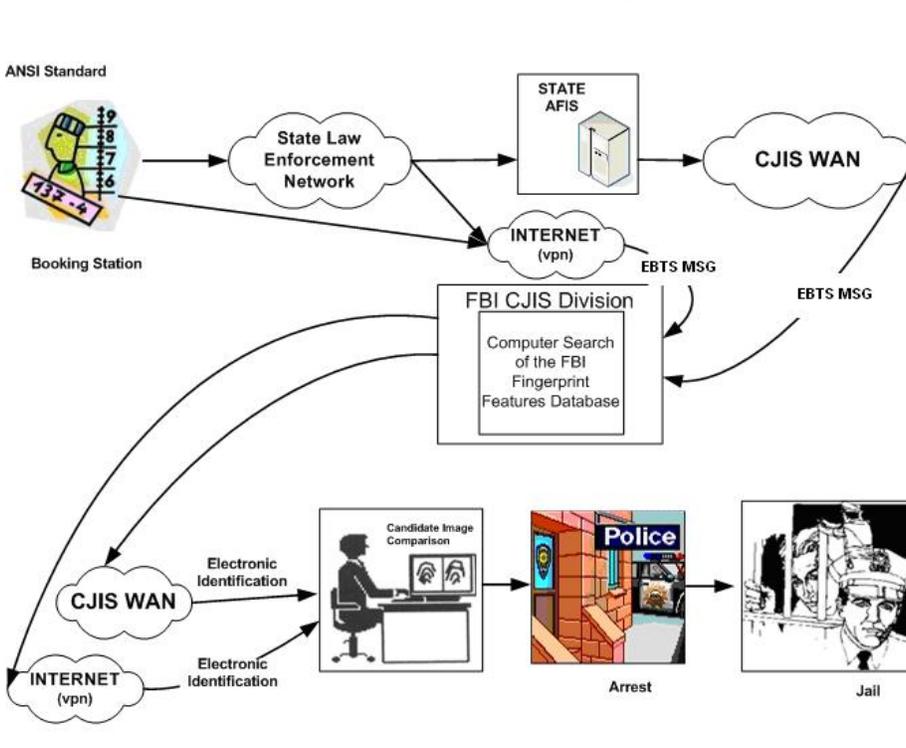

Deleted: Figure 2, "Investigative Fingerprint Searches."

Formatted: Caption, Centered, Line spacing: single, Tabs: Not at 0" + 0.5" + 1" + 1.5" + 2" + 2.5" + 3" + 3.5" + 4" + 4.5" + 5" + 5.5" + 6" + 7" + 7.5" + 8" + 8.5" + 9"

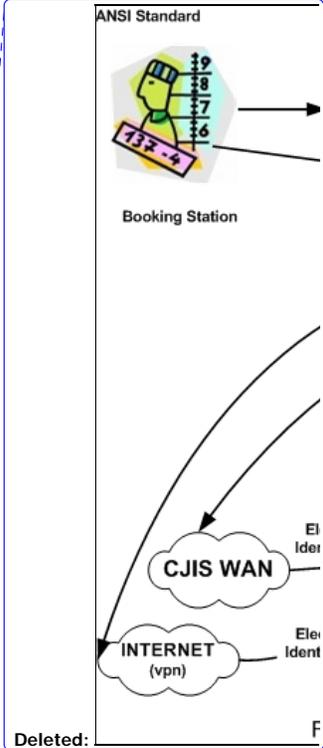

Deleted:

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

All electronic transactions between the FBI and the originating state agency will be routed via the CJIS WAN or the Internet. State and local agencies must handle the continuance of these transactions among themselves through the state network. For OFOs, tribal, or international agencies, routing of search and response will be via their connection to the CJIS WAN or the Internet.

Deleted: ¶
¶ <sp>¶

The following are the potential responses to tenprint fingerprint searches:

| <u>TOT</u> | <u>RESPONSE TRANSACTION</u> |
|------------|-----------------------------|
| SRT | Search Result – Tenprint |
| ERRT | Tenprint Transaction Error |
| TPRR | Tenprint Rap Sheet Response |

The Search Result Tenprint (SRT) response will include a candidate list and the fingerprint images of the highest scoring candidate who potentially matches the submitted fingerprints. Retrieval of the additional images is accomplished through separate image retrieval requests. The Tenprint Rap Sheet Response will contain candidates and their criminal history, but no fingerprint images.

Deleted: RPSR . . . Rapid Print Image Search Response (Future Capability)¶

3.2.1 Type of Transaction Definitions

3.2.1.1 Tenprint Fingerprint Image Searches (TPIS)

The tenprint fingerprint images are transmitted along with any required fingerprint classification information and descriptors by the originator. The PAT field is to be included for every amputated or unprintable finger. The fingerprint characteristics will be automatically extracted from the image at the FBI with no human intervention. There will be no manual editing of fingerprint characteristics. The search process of the criminal fingerprint files is conducted and the results transmitted to the originator. The response consists of the match report including the identification of matching candidates and the corresponding fingerprint images of the candidate with the highest score. Images for the remaining candidates may be retrieved through separate image retrieval requests. The TPIS TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: In the future, the Rapid Print Image Search Response may return an SRF value corresponding to the match results of the tenprint search (i.e., red, yellow, or green). Similar to the Tenprint Rap Sheet Response, the Rapid Print Image Search Response will return criminal history (and the most recent full frontal photo if requested and on file) for a red response. Additionally, further information describing the SRF value will be provided to the contributor in the Action to be Taken (ACN) field of the response. No fingerprint images will be returned for either the Tenprint Rap Sheet Response or the Rapid Print Image Search Response.

Deleted: ¶

3.2.1.2 Tenprint Fingerprint Features Search (TPFS)

The fingerprint characteristics, including classification, are extracted and transmitted by the originator along with search criteria. The search process uses this information to generate the candidate list. The response is similar to those for TPIS transactions. The TPFS TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

Deleted: i
Deleted: s
Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

Note: The fingerprint characteristics referred to here are the native-mode fingerprint characteristics of the FBI's AFIS; *i.e.*, the fingerprint characteristics' data transmitted will be in a format used or accepted by AFIS/FBI. The originating agency must have the capability to extract and encode fingerprint characteristics data in the FBI native mode in order to use this TOT.

3.2.1.3 Search Results – Tenprint (SRT)

This transaction is returned by the FBI in response to a TPIS or TPFS request. It includes a candidate list composed of the names and FBI numbers of up to 25 subjects selected by AFIS/FBI as potential matches to the fingerprint images or features that were submitted. The fingerprint image(s) of the first candidate on the candidate list will also be included. The fingerprint images in the response may be specified by finger position in the search request. The SRT TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

3.2.1.4 Tenprint Transaction Error (ERRT)

This transaction is returned by the FBI to indicate a transaction error. It includes a message field (MSG) indicating the type of error detected. Error responses are described in Section 3.8. The ERRT TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

3.2.1.5 Tenprint Rap Sheet Searches (TPRS) and Response (TPRR)

The tenprint fingerprint images are transmitted along with any required fingerprint classification information and descriptors by the originator. The PAT field is to be included for every amputated or unprintable finger. The fingerprint characteristics will be automatically extracted from the images at the FBI with no human intervention. There will be no manual editing of fingerprint characteristics. The search process of the criminal fingerprint files is conducted and the results transmitted to the originator. The response consists of rap sheets for up to the top twenty candidates. Images are not returned as part of this process. The TPRS TOT is summarized in Table D-3. Edit specifications for the fields that are used may be found in Table C-1.

Note: TPRS is a limited-use TOT that requires coordination with FBI prior to use.

3.2.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

Formatted: Don't keep with next, Don't keep lines together

Deleted: i

Deleted: s

Deleted: i

Deleted: s

Deleted: i

Deleted: s

Deleted: 3.2.1.6 Rapid Print Image Search (RPIS) and Response (RPSR) (Future Capability)¶

¶ This transaction is provided by the FBI to enable rapid fingerprint searches implemented as part of the FBI's Repository for Individuals of Special Concern (RISC). RISC provides the capability to perform a rapid fingerprint search (with from two to ten rolled or flat fingerprint images) against a special file containing the most wanted individuals, including, among others, identified terrorists, wanted aliens, or other international subjects identified as a threat to the United States. Rapid Print Image Search (RPIS) transactions will provide a 10-second or less response to searches from authorized agencies; the response transaction (RPSR) consists of a red/yellow/green-light indicator corresponding to the match results against IAFIS tenprint repositories. Red indicates a hit has been made against an identified threat subject. Green indicates there are no disseminable hits. Yellow indicates a need for further investigation. As stated in paragraph 3.2, for a red light response, a criminal history will be returned for any candidates (similar to TPRR), as well as the most recent full frontal photo if requested, on file and disseminable. Additionally, further information describing the SRF value will be provided to the contributor in the Action to be Taken (ACN) field of the response. Edit specifications for the fields used may be found in Table C-1. [40]

Formatted: Don't keep with next

Formatted: Don't keep with next, Don't keep lines together

Deleted: Input: The types and quantities of logical records required to submit a fingerprint investigative ... [41]

Formatted: Don't keep with next

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.3 Electronic Submission of Latent Prints

Electronic latent print submissions to the FBI will originate from the agency having legal jurisdiction of the case, federal, state, or local. These submissions, as differentiated from latent searches (see Section 3.4), are strictly for the purpose of submitting crime scene information to the FBI for processing in support of law enforcement investigations. The crime scene evidence will be processed and the desired latent prints will be electronically captured. The term “latent prints” includes fingerprints, palmprints, toe prints, and footprints. Investigation of latent cases may also generate tenprints used for comparison purposes (*e.g.*, suspect, victim, or other personnel with authorized access to the crime scene). The sender must designate the TOT in the Type-1 record to specify which process is to be followed. The following TOTs are applicable to electronic latent print submissions to the FBI:

| <u>TOT</u> | <u>TRANSACTION</u> |
|------------|--|
| LFS | Latent Fingerprint Image(s) Submission |
| CFS | Comparison Fingerprint Image(s) Submission |
| MCS | Major Case Image(s) Submission |
| ELR | Evaluation Latent Fingerprint Submission Request |

Figure 9 illustrates the processing flow for electronic latent transactions.

Formatted: Keep lines together
Formatted: Keep with next, Keep lines together

Deleted: The
Deleted: s is illustrated in Figure 3, “Electronic Latent Submission.”

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

The FBI's response to a latent fingerprint image submission (*i.e.*, LFS) contains a TOT of "LSR" (denoting "Latent Submission – Results") in the Type-1 Record. It includes the identification of a subject with matching fingerprints or a non-identification decision. If the response to an LFS transaction is a non-identification, the latent case may be stored in the Unsolved Latent File. If there is an error in the submittal, an ERRL response will be returned. Search results will be returned as e-mail attachments to the address derived from the search e-mail using SMTP processing. The return address must be on the CJIS WAN or the LEO VPN.

The responses to ELR submissions contain a TOT of "NAR" (denoting "Notification of Action Response"). It defines the action taken based on the analysis of the submitted latent images. For an ELR submission, the NAR may indicate that a latent case will be established.

There will be no IAFIS responses other than communication protocol acknowledgments for the transaction types CFS and MCS. However, a latent report may be generated and provided to the contributor.

Note: This report is not an automated report and will **not** be transmitted electronically through IAFIS.

3.3.1 Type of Transaction Definitions

3.3.1.1 Latent Fingerprint Image(s) Submission (LFS)

A Latent Fingerprint Image Submission is intended solely for the purpose of executing an AFIS search, and is to be used by state, local, or other federal agencies not able to extract IAFIS-compatible minutiae. The latent fingerprint images are transmitted along with the search criteria by the originator. Latent fingerprint specialists will perform comparisons of the search latent fingerprint image(s) against the candidate(s) selected and make the Ident/non-Ident decision(s). The Ident/non-Ident decision(s) will be transmitted as a response (*i.e.*, LSR), including the name and FBI number of the identified subject. The LSR will include the full set of 14 tenprint images if an identification has been made. The latent search image(s) will be stored in the Unsolved Latent File if requested in the submission by the originator. The LFS TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

3.3.1.2 Comparison Fingerprint Image(s) Submission (CFS) (For use by FBI only)

This TOT provides for the transmission of tenprint fingerprint images or other known prints from individual(s) who could have caused the latent impressions associated with a case. The CFS is intended solely for internal FBI use. The comparison prints may consist of the following:

1. Suspect known prints
2. Victim known prints
3. Known prints from individuals being compared for purposes of elimination
4. Other individuals involved in the case

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

The submittal may include all the fingerprints normally enclosed in a tenprint submittal plus optional additional prints (e.g., palmprints), if applicable. The known print images will be stored and accessible to the fingerprint specialist for comparison and analysis. Elimination prints for several individuals must be sent as individual submittals for each. No electronic response other than communication protocol acknowledgment of receipt is returned for this TOT. The CFS TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s
Deleted: ¶

3.3.1.3 Major Case Image(s) Submission (MCS) (For use by FBI only)

This TOT provides for the submittal of fingerprints normally enclosed in a tenprint submittal plus additional images of the extreme tips, sides, and lower joints of the fingers, and surface and extreme sides of palms for possible use in comparisons for a case. The MCS is intended solely for internal FBI use in conjunction with a Latent Print Unit investigation. The submitted prints will be added to the Major Case Image File. In addition, the tenprints may be searched against the criminal fingerprint databases and, providing that all required data are submitted, it may be used to establish a new record in the criminal subject databases or to update existing records on the subject. No electronic response other than communication protocol acknowledgment of receipt is returned for this TOT. The MCS TOT is summarized in Table E-1. Edit specifications for the fields it uses may be found in Table C-1.

3.3.1.4 Evaluation Latent Fingerprint Submission Request (ELR) (For use by FBI only)

This is a transaction to be used solely for FBI purposes, including FBI field office consultations with the LPU (Latent Print Unit) examiners. The contents of the submission are similar to a latent submission (i.e., LFS). The transaction will result in a reply (e.g., NAR) indicating the action to be taken. The action could be the establishment of a latent case, a request for additional information, or an evaluation of the case feasibility and recommendations for further actions. The ELR TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: F
Deleted: S

Deleted: i
Deleted: s

3.3.1.5 Latent Submission Results (LSR)

This transaction is in response to a latent fingerprint submission (LFS transactions). It includes a Search Results Findings (SRF) field indicating an identification or non-identification decision and, if the LFS results in an identification, it returns a name, FBI number, and full set of 14 tenprint images of the identified subject. The LSR TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

3.3.1.6 Notification of Action Response (NAR)

This transaction will be in response to an evaluation request (ELR transaction). The response may include a message field (MSG) indicating the results of the evaluation or recommendations for further actions included in the Action to be Taken (ACN) field. The NAR

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

3.3.1.7 Latent Transaction Error (ERRL)

This transaction is returned by the FBI in response to a transaction that contained errors such as search exceeding the penetration threshold, missing or inadequate quality fingerprints, missing mandatory information, or invalid contents. The MSG field shall include additional information on the causes for the rejection. Error responses are described in Section 3.8. The ERRL TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

3.3.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

3.4 Latent Fingerprint Searches

An IAFIS user may transmit one or more latent fingerprint images or corresponding features sets assumed to be from the same subject to be searched against the FBI's Tenprint Criminal Features Master File (a Latent Cognizant search). This latent fingerprint search request will originate from the agency having legal jurisdiction of the case, either federal, state, or local. The crime scene evidence will be processed and the desired latent fingerprints will be electronically captured. To conduct a latent fingerprint search, the originating agency will electronically transmit latent fingerprint images and/or FBI native-mode fingerprint features. These images or features may be stored in the Unsolved Latent File (ULF) through use of the ULF flag, which is included in the search request. If the ULF flag is set to "yes," the submitted fingerprint image(s) and/or features will be added to the ULF (the default setting of the ULF flag is "no"). The biographic descriptor data contained in the Type-2 records, T2LFFS and T2LFIS, are used as search parameters to narrow the search penetration so that the penetration threshold is not exceeded. The same descriptors may be submitted in a separate Latent Penetration Query prior to initiating the search to determine the penetration.

Deleted: . Submission: The types and quantities of logical records required in electronic latent submissions and requests are as follows:¶
¶
. X . 1 Type-1 Header Record¶
. X . 1 Type-2 Record¶
X . 1-14 Type-4 or Type-13 Fingerprint Image Records. (1-10 records for latent submissions, 14 records for comparison tenprint fingerprint submissions, or an optional set of 14 images for major case submissions), or¶
X . 1 or more Type-7 records containing miscellaneous (e.g., palmprints as part of a CFS or MCS) or high resolution (greater than 500 dpi) latent images. The LFS and ELR submissions are limited to 10 Type-7 or Type-13 records. The MCS may have more than 10.¶
¶
. Response: In response to a latent submission (LFS), the following logical records will be returned (in the LSR):¶
¶
. X . 1 Type-1 Header Record¶
. X . 1 Type-2 Record¶
. X . 0-14 Type-4 or Type-14 Fingerprint Image Records containing the tenprint fingerprint images corresponding to the finger of positions of the submitted latent images (optional for LSR responses at the discretion of the originator).¶

IAFIS will accept latent searches as attachments to e-mails where the file name of the attachment may correspond to information associated with the owner of the search and case information. The IAFIS front-end (EFCO) will perform the necessary conversion within IAFIS to facilitate successful completion of the search transaction (e.g., TEH1234.LFFS) and will then ensure that any response (e.g., SRL, ERRL) carries the filename corresponding to the search transaction (e.g., TEH1234.SRL). This implementation is designed to facilitate association of the response transaction with the original search (previous methodology returned all responses with a filename of EBTS.SRL, making it difficult to differentiate one response from another).

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

In the future, latent searches will have the ability to request a simultaneous search of other repositories, such as Canada’s RTID System or DHS IDENT, submitters will enter the appropriate values for the desired destination in the Name of Designated Repository (2.098 NDR) field in the Type-2 record.

The latent fingerprint search process differs from the electronic latent submissions in that there will be no human intervention on the part of the FBI. The sender must designate the TOT to specify which process is to be followed. The following list of TOTs is applicable to latent fingerprint searches transmitted to the FBI:

| <u>TOT</u> | <u>TRANSACTION</u> |
|------------|--------------------------------------|
| LFIS | Latent Fingerprint Image(s) Searches |
| LFFS | Latent Fingerprint Features Searches |
| LPNQ | Latent Penetration Query |
| LSIR | Latent Search IDENT Response |

A hierarchical approach to AFIS searches must be adhered to. Transactions generated by local agencies must be processed by the local AFIS (if available) and electronically transmitted to a state AFIS (if available) before submitting a search to the FBI. If an identification decision is made as a result of processing at any of the previous levels, there will be no further processing of the request at a higher level.

In addition to the search-related transactions, a latent candidate comparison response is also provided. The FBI CJIS Division has a requirement to collect statistics regarding system performance to ensure IAFIS is performing at its peak accuracy. The Latent Search Ident Response (LSIR) is the transaction by which users will inform IAFIS of the results of their latent search results comparisons of candidates in the SRL response. These results will fall into the categories of Ident (I), Non-Ident (N), or Pending (P). The LSIR transaction is sent to IAFIS immediately upon completion of the comparison process when authorized by the user.

All electronic transactions between the FBI and the originating agency will be routed via the CJIS WAN or the Internet.

The following are the potential responses to latent fingerprint transactions:

| <u>TOT</u> | <u>RESPONSE TRANSACTION</u> |
|------------|--------------------------------|
| SRL | Search Result – Latent |
| LPNR | Latent Penetration Response |
| ULM | Unsolved Latent Match Response |
| ERRL | Latent Transaction Error |

The response to a valid latent search transaction will contain a TOT of “SRL” (denoting “Search Results – Latent”) in the Type-1 record. It will also include the (up to NCR) fingerprint


Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"
Deleted: 002
Deleted: APRIL 1, 2008

image(s) of the finger(s) that potentially matches the latent fingerprint. If the latent search includes more than one finger, the image corresponding to the highest matched score for each candidate will be returned. The search parameters must limit the search to no more than 30 percent of the population of the file being searched. A Latent Penetration Query may be sent to determine the percentage of repository penetration prior to initiation of a search. The results will be returned in a Latent Penetration Response. Any search request for the latent cognizant repository that does not include sufficient search parameters to limit the search to 30 percent will result in a Latent Transaction Error (ERRL) response. The response will include the (two digit) percentage of the repository penetration determined from the submitted parameters in the Status/Error Message (MSG) field of the Type-2 record. Detection of errors will also cause a Latent Transaction Error (ERRL) response.

The ULM may be a delayed response to an LFFS or LFIS (Appendix L, Table L-4). If a tenprint submission made after an LFFS or LFIS that has added a latent fingerprint image to the Unsolved Latent File matches that latent print, a ULM will be sent to the latent print contributor.

The processing flow for latent fingerprint image transactions is illustrated in [Figure 10](#).

Figure 10 Investigative Latent Searches

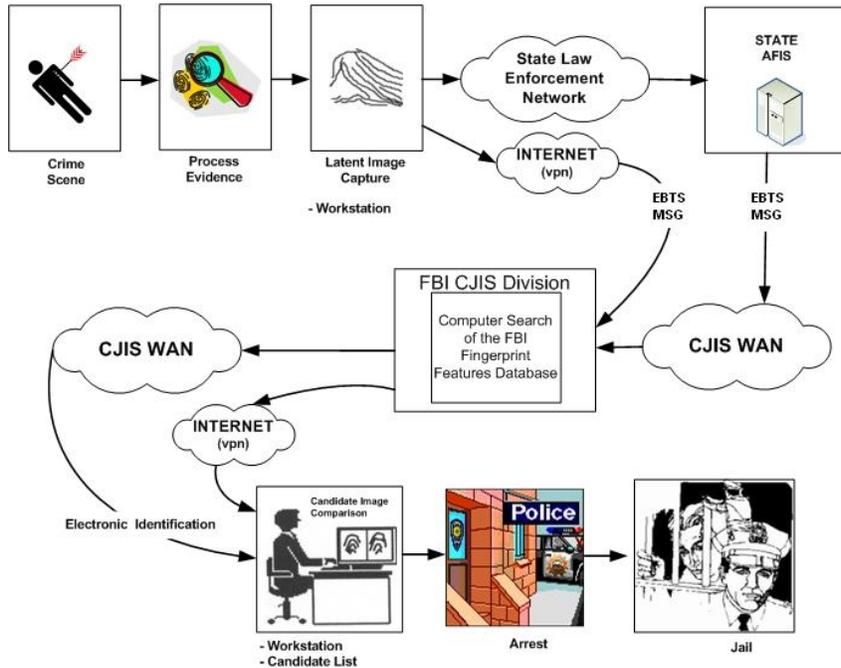

Deleted: Figure 4, "Investigative Latent Searches."

Formatted: Caption, Centered, Line spacing: single, Tabs: Not at 0" + 0.5" + 1" + 1.5" + 2" + 2.5" + 3" + 3.5" + 4" + 4.5" + 5" + 5.5" + 6" + 7" + 7.5" + 8" + 8.5" + 9"

Deleted: <sp>

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.4.1 Type of Transaction Definitions

3.4.1.1 Latent Fingerprint Image(s) Search (LFIS)

The latent fingerprint image(s) are transmitted along with the search criteria by the originator. The fingerprint features will be automatically extracted from the images with no human intervention. There will be no manual editing of fingerprint characteristics. IAFIS will conduct a search of the Latent Cognizant repository and will transmit the results to the originator. In the event that images are of insufficient quality for AFIS/FBI to be able to extract features and perform a search, IAFIS will respond with a Latent Transaction Error message.

Multiple fingerprint images may be searched if the submitter believes the images are from a single subject. Multiple images must be accompanied by a finger position for each image. Only this set of finger numbers will be searched.

If, in submitting a single latent image, the finger position of the image is unknown, the submitter may use the PAT (2.034) and FGP (2.074) fields as follows to indicate that the position is unknown while allowing speculation on the finger position: (1) set the Finger Number subfield of PAT to "00" to indicate UNKNOWN while supplying the Pattern Classification Code as usual; (2) in conjunction, submit one or more instances of the FGP field containing the finger position guesses; and (3), in the FGP field of the Type-7 record, send a binary "0." If many finger guesses for a single finger search are provided, the PAT/RCD1/RCD2 fields should be entered only for the first finger guess and will be automatically duplicated by IAFIS for all other finger guesses. The FGP field in the Type-13 record shall contain one or more of the possible finger or palm positions that may match the latent image. The decimal code number corresponding to the known or most probable finger position shall be taken from Table 12 or the most probable palm position from Table 34 and entered as a one- or two-character ASCII subfield. Additional finger and/or palm positions may be referenced by entering the alternate position codes as subfields separated by the "§" separator character. The code "0" for "Unknown Finger" shall be used to reference every finger position from one through ten. The code "20" for "Unknown Palm" shall be used to reference every listed palmprint position. Code "19" shall be used to reference major case prints for latent print impression areas.

Deleted: RS

Latent fingerprints submitted for searches may be added to the Unsolved Latent File as discussed in Paragraph 3.3.1.1. One or two Type-2 records may be submitted in the search message. IAFIS will automatically use the descriptive data in the first Type-2 record for the search. If originators desire to store descriptive data with the unsolved latent that are different from those provided for the purpose of limiting the search penetration of the Latent Cognizant repository, they may include a second Type-2 record. In either case, the first Type-2 received with the ULF flag set to "Y" will be used to add descriptors to the Unsolved Latent File.

The LFIS TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.4.1.2 Latent Fingerprint Features Search (LFFS)

The latent fingerprint features are extracted and transmitted along with the search criteria by the originator. The search process of the Latent Cognizant repository will be conducted and the results transmitted to the originator as described for the LFIS transaction. The fingerprint features referred to here are the native-mode fingerprint features of the FBI's AFIS; *i.e.*, the fingerprint features information transmitted will be in a format used or accepted by AFIS/FBI.

Originators may add the latent features from a features search message and, if desired, the latent fingerprint images corresponding to those features to the Unsolved Latent File as described in Paragraph 3.4.1.1. Multiple-finger searches and searches where the finger position is not known are to be treated in the same manner as the LFIS.

The originating agency must have the capability to extract and encode fingerprint features in the FBI native-mode to use this TOT. The LFFS TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: ¶

Deleted: i

Deleted: s

3.4.1.3 Search Results – Latent (SRL)

This transaction is returned by the FBI in response to a latent search request. It will include a candidate list composed of names and FBI numbers of each candidate and the corresponding fingerprint image(s) of the number of candidates specified in the NCR field of the search message. Up to 99 candidates, their match scores, and the finger positions of the images on file that matched may be included in the response. In addition, if the search included an indication that the latent image should be stored in the Unsolved Latent File, the SRL will return the AFIS Segment Control Number (SCNA) of the stored latent image. The SRL TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

3.4.1.4 Unsolved Latent Match Response (ULM)

This transaction is issued by IAFIS when a newly submitted criminal, civil, or latent fingerprint search matches an unsolved latent case previously submitted by a state, local, federal, international, or tribal agency. This transaction is an unsolicited response to the sponsor of the unsolved latent fingerprint, not to the submitter of the criminal, civil, or latent search images. The response will include the FBI number (if criminal transaction), name, personal identifiers, and fingerprint images of the subject or case and contact information (*e.g.*, CIN/CIX, ATN) in the case of a latent search image that was matched with the unsolved latent fingerprint and the images of the unsolved latent fingerprint. Up to 10 images can be returned in this transaction when a tenprint record hits against multiple latents in the ULF stored by a multi-finger search. The "owner" of the unsolved latent case is responsible for conducting the comparison. The ULM TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.4.1.5 Latent Penetration Query (LPNQ)

The Latent Penetration Query allows the user to receive a percentage of the Latent Cognizant repository that will be accessed by a latent fingerprint search. The query contains the search parameters that will be defined in either the LFIS or LFFS search request except for the Type-4 or -7 image or Type-9 features records. This will allow setting the search parameters to ensure that the maximum penetration allowed is not exceeded. Penetration tables developed by AFIS/FBI may be used as an aid to help the user determine expected penetration. This transaction applies only to a single finger even if the original transaction included multiple fingers. The LPNQ TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

3.4.1.6 Latent Penetration Query Response (LPNR)

The response to a penetration query will contain the estimated size for the repository search based on the transaction-defined characteristics. The response will indicate the percent penetration to allow further refinement of the search criteria. The LPNR TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

3.4.1.7 Latent Search Ident Response (LSIR)

This transaction provides an indication to the FBI's IAFIS of the comparison results from latent candidates contained in an SRL response message. The comparison results are classified as Ident (I), Non-Ident (N), or Pending (P). In addition, information will be provided to indicate the transaction number of the original search and response, as well as which candidate from the SRL matched the search image, if any. Edit specifications for the fields contained in the LSIR may be found in Table C-1, while the LSIR transaction is summarized in Table E-2. SRF for LSIR transactions will contain "IDENT," "Non-IDENT," or "PENDING."

3.4.1.8 Transaction Error (ERRL)

This transaction is returned by the FBI to indicate a transaction error. It includes a message field (MSG) in dictating the type of error detected. Error responses are described in Section 3.8. The ERRL TOT is summarized in Table E-1. Edit specifications for the fields it uses may be found in Table C-1.

3.4.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

Deleted: i

Deleted: s

Deleted: i

Deleted: s

Deleted: Requests: The types and quantities of logical records required to submit a latent search request are as follows:¶

¶

<#>1 Type-1 Header Record¶

X . 1-2 Type-2 Record¶

X . 1-10 Type-4, Type-7, Type-13, or Type-9 Record each containing the image of a latent fingerprint or the native-mode characteristics of a latent fingerprint. (Type-4, Type-7, and Type-13 records may not be combined in any single search message. However, Type-4, Type-7, or Type-13 records may accompany Type-9 records in a features search message.)¶

¶

Note: The Latent Penetration Query (LPNQ) and Latent Search IDENT Response (LSIR) do not require the Type-4, Type-7, Type-13, or Type-9 submission.¶

¶

. Response: In response to a latent search, the following logical records will be returned:¶

¶

X . 1 Type-1 Header Record¶

X . 1 Type-2 Record¶

X . 0-NCR Type-4 or Type-14 Fingerprint Image Records where NCR is the maximum number of candidate images the user has specified in the search message (see Appendix C regarding the NCR field - 2.079). The actual number of images returned may be fewer than NCR if fewer candidates resulted in the search. For example, if the user submits three fingers to be searched against the repository, specifying an NCR of 7 and only five candidates are returned, the user will receive five images: the top-scoring finger from each candidate. The image of the top-scoring latent match score fingers will be returned.¶

. The remaining candidates' fingerprints may be retrieved via a request for fingerprint images using the IRQ transaction.¶

¶

. For the Latent Penetration Query Response, the penetration data will be in the Type-2 record. There is no response from the FBI to an LSIR transact(... [42])

Deleted: 002


Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.5 Latent File Maintenance Requests

An IAFIS user will transmit file maintenance messages to specify transactions related to the unsolved latent file; specifically, an Unsolved Latent Record Delete Request (ULD) or an Unsolved Latent Add Confirm Request (ULAC). The processing flow for electronic requests to delete unsolved latent fingerprint records is illustrated in [Figure 11](#).

Figure 11 Electronic Requests to Delete Unsolved Latent Fingerprint Records

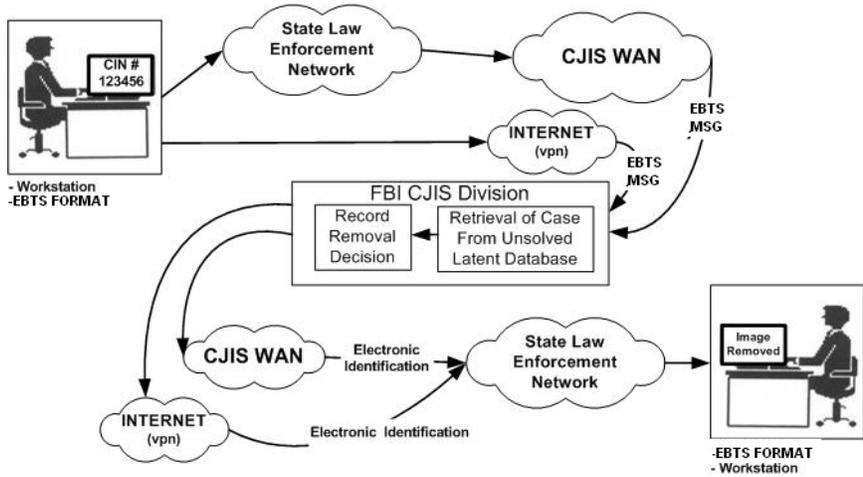

Deleted: Figure 5
 Deleted: , "Electronic Requests to Delete Unsolved Latent Fingerprint Records."
 Formatted: Caption, Centered, Line spacing: single, Tabs: Not at 0" + 0.5" + 1" + 1.5" + 2" + 2.5" + 3" + 3.5" + 4" + 4.5" + 5" + 5.5" + 6" + 7" + 7.5" + 8" + 8.5" + 9"
 Formatted: Normal, Tabs: Not at 7" + 7.5" + 8" + 8.5" + 9"

The following TOTs are latent file maintenance transactions transmitted to the FBI:

Deleted: <sp>

| TOT | TRANSACTION |
|------|---------------------------------------|
| ULD | Unsolved Latent Record Delete Request |
| ULAC | Unsolved Latent Add Confirm Request |

The FBI's responses to latent maintenance transactions are as follows:

| TOT | RESPONSE TRANSACTION |
|------|--------------------------------------|
| ULAR | Unsolved Latent Add Confirm Response |
| ULDR | Unsolved Latent Delete Response |
| UULD | Unsolicited Unsolved Latent Delete |
| ERRL | Latent Transaction Error |

Deleted: 002
 Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
 Deleted: APRIL 1, 2008

3.5.1 Type of Transaction Definitions

3.5.1.1 Unsolved Latent Record Delete Request (ULD)

This TOT is used to request that unsolved latent file records be removed from the FBI's Unsolved Latent files. If a set of unsolved latent images were added from a multi-finger latent search, the ULD applies to the entire set of images added. The ULD TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

3.5.1.2 Unsolved Latent Add Confirm Request (ULAC)

This TOT is used to request that unsolved latent file records be semi-permanently added (since the ULF is a FIFO) to the FBI's Unsolved Latent files. This TOT must be received within 14 days of receipt of the IAFIS response to an LFIS or LFFS transaction. If a set of unsolved latent images were added from a multi-finger latent search, the ULAC applies to the entire set of images added. The ULAC TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

3.5.1.3 Unsolved Latent Add Confirm Response (ULAR)

This transaction is used to provide confirmation that an unsolved latent file record has been permanently added to the FBI's Unsolved Latent files. The ULAR TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

3.5.1.4 Unsolved Latent Delete Response (ULDR)

This transaction is used to indicate that a record has been deleted from the FBI's Unsolved Latent files in response to a ULD message. The ULDR TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

3.5.1.5 Unsolicited Unsolved Latent Delete (UULD)

This transaction is used to indicate that a record has been deleted from the FBI's Unsolved Latent files because the FBI did not receive an Unsolved Latent Add Confirm Request (ULAC) transaction for that record within the 14 days allowed or because the Unsolved Latent File (ULF) (or a particular subfile of the ULF) contained the maximum number of allowable records when an attempt was made to add a record and the record deleted was the oldest record in the file/subfile. If a set of unsolved latent images were added from a multi-finger latent search, the UULD applies to the entire set of images added. The UULD TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: ¶

Deleted: i

Deleted: s

3.5.1.6 Latent Transaction Error (ERRL)

This transaction is returned by the FBI to indicate a transaction error. It includes a message field (MSG) indicating the type of error detected. Error responses are described in

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

Section 3.8. The ERRL TOT is summarized in Table E-1. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

3.5.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

3.6 Requests For Images

Image services include a transaction for requesting images on file at the FBI and to request updates of existing images (see Table 3-3 Maximum Sizes for Fingerprint).

To initiate a request for image(s) from the FBI's database, the sending agency electronically transmits the unique record identifier of the subject (*i.e.*, FBI number or other identifier, such as Universal Control Number (UCN)). Images that reside in the FBI's Unsolved Latent File may also be requested by providing the AFIS Segment Control Number (SCNA) of the latent record. This request will be routed to the FBI, processed, and returned to the requester through the CJIS WAN or the Internet. If the requester is a local agency, the request and response will be interfaced with the CJIS WAN through the state law enforcement network or the Internet. There will be no manual intervention on the part of the FBI.

Deleted: . Request: The types and quantities of logical records required to submit an electronic request to perform maintenance in the Unsolved Latent Fingerprint file records are as follows:
¶
X . 1 Type-1 header record¶
X . 1 Type-2 record.¶
¶
. Response: The response to an electronic request to perform maintenance in the Unsolved Latent Fingerprint file records will include the following logical records:
¶
X . 1 Type-1 header record¶
X . 1 Type-2 record.¶

Requests for a set of images will be submitted to the FBI under the IRQ TOT (denoting Image Request) in the Type-1 record. The FBI's response will contain an IRR TOT (denoting Image Request Response) in the Type-1 record. The processing flow for image requests is illustrated in Figure 12, "Image Request."

Deleted: Figure 6

After completing the image retrievals and responses of a multiple-set request, the FBI will respond with a Fingerprint Image Response Summary listing all requested FBI numbers and their response status. The FBI's response will contain an ISR TOT in the Type-1 record.

The following TOTs are applicable for requests for fingerprint images:

| TOT | TRANSACTION |
|-----|---------------|
| IRQ | Image Request |

The FBI's response to requests for images is as follows:

| TOT | RESPONSE TRANSACTION |
|------|-------------------------|
| IRR | Image Request Response |
| ISR | Image Response Summary |
| ERRI | Image Transaction Error |

Deleted: ¶
¶
Formatted: Keep with next, Keep lines together
Formatted: English (U.S.)
Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

3.6.1 Type of Transaction Definitions

3.6.1.1 Image Request (IRQ)

This transaction enables users to retrieve images from the FBI databases so a comparison can be made by the requester at user facilities. The requester identifies the FBI number(s) (for criminal records) of the subject(s) whose fingerprint images are being requested. In the future, the requester will be able to identify civil record number(s), or other subject identifier (e.g., Universal Control Number (UCN)) of the subject(s) whose biometric images are being requested. Up to 1,000 subjects' records may be requested per transaction. Specific fingerprint images or the complete set may be requested. In the future, other biometrics (such as palmprints, photos, and iris images) that are associated with that record may also be requested. The transaction will be processed, and requester-selected fingerprint images on file at the FBI will be transmitted in the response. Each subject record identifier number in the request will be addressed in a separate Image Request Response (IRR). If the request contains any errors, an Image Error Response (ERRI) will be returned, including the reason for the return in a message field (MSG). Errors associated with individual record identifier numbers, such as an image set not being on file, will be reported in the Fingerprint Image Response Summary (ISR). The remaining valid subject identifier numbers will result in individual IRR responses. The mandatory and optional fields for the IRQ TOT are summarized in Table I-1 and the Field Edit Specifications for the fields that are used may be found in Table C-1.

Deleted: Logical Record Layout for the IRQ TOT is given

In the future, image request transactions will indicate requests for images other than criminal tenprint fingerprints by including the appropriate value in the Name of Designated Repository (NDR) Field (see NDR 2.098 description in Appendix C) in the Type-2 record.


For any IRQ, the submitter of the transaction may indicate the desire for IAFIS to return the Type-9 features records associated with the returned images. The Type-9 features records may be used for comparison purposes by overlaying the features on the image records. For IRQ transactions requesting multiple sets of images, the request to return features records must apply equally to all identified sets of images. Otherwise, individual IRQ transactions must be submitted.

3.6.1.2 Image Request Response (IRR)

This transaction is returned by the FBI to provide requested images on file at the FBI to the requester. Each subject record identifier number in the request having images available causes a separate response. The response will include the subject record identifier number and the requested Type-4 or Type-14 fingerprint images. The specified fingerprint images will be transmitted in the response. If requested, the Type-9 features records will be included as well. The mandatory and optional fields for the IRR TOT are summarized in Table I-1 and the Field Edit Specifications for the fields that are used may be found in Table C-1.


Deleted: 002
Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

Figure 12 Fingerprint Image Request

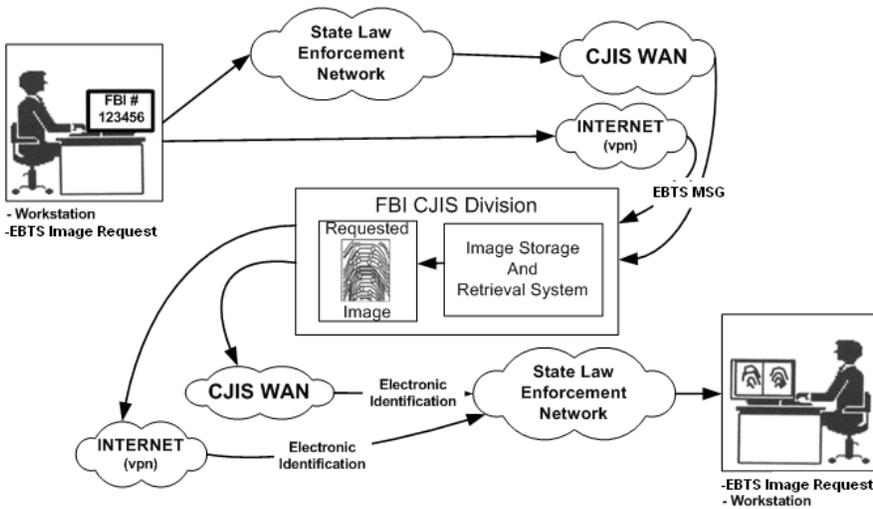

Formatted: Caption, Centered, Line spacing: single, Tabs: Not at -0.75" + -0.5" + 0" + 0.5" + 1" + 1.5" + 2" + 2.5" + 3" + 3.5" + 4" + 4.5" + 5" + 5.5" + 6" + 6.5" + 7" + 7.5" + 8"

Formatted: Line spacing: single, Tabs: Not at -0.75" + -0.5" + 0" + 0.5" + 1" + 1.5" + 2" + 2.5" + 3" + 3.5" + 4" + 4.5" + 5" + 5.5" + 6" + 6.5" + 7" + 7.5" + 8"

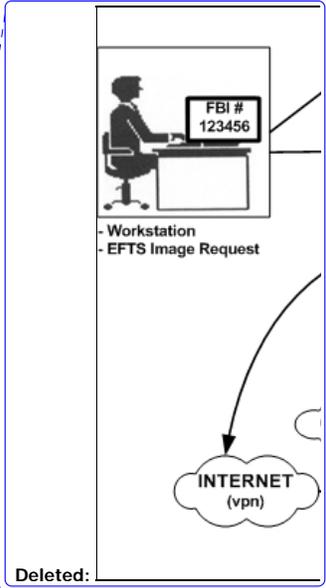

Deleted:

Deleted: ¶

Deleted: 3.6.1.2 Image Request Response (IRR)¶

¶ This transaction is returned by the FBI to provide requested images on file at the FBI to the requester. Each subject record identifier number in the request [...] [43]

Deleted: The Logical Record Layout for the IRR TOT is given in Table I-2.

Deleted: ¶

Deleted: Summary

Deleted: The Logical Record Layout for the ISR TOT is given in Table I-6.

Deleted: The Logical Record Layout for the ERRI TOT is given in Table I-3.

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.6.1.3 Image Summary Response (ISR)

This transaction is returned by the FBI to summarize the results of the image request processing. Each subject record identifier number in the original request (e.g., UCN or FNU) is listed, along with its related process status. Status may be image request success, invalid subject record identifier number, or requested image(s) not on file. The mandatory and optional fields for the ISR TOT are summarized in Table I-1 and the Field Edit Specifications for the fields that are used may be found in Table C-1.

The current IAFIS implementation will drop from the list any candidate for which there is no image, and will not generate any external error condition, although there is an internal indicator that there may be an out-of-sync condition. The response process is not interrupted, and there is currently no other indication of such a problem in the messaging. The only external indication that an out-of-sync condition exists is that the list of returned images differs from the request.

3.6.1.4 Image Transaction Error (ERRI)

This transaction is returned by the FBI to indicate a transaction error. It includes a message field (MSG) indicating the type of error detected. Error responses are described in Section 3.8. The mandatory and optional fields for the ERRI TOT are summarized in Table I-1.

3.6.2 Requirements for Logical Record Types

Deleted: ¶

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

3.7 Electronic Requests To Upgrade Fingerprint Images

Fingerprint image update transactions are to be used particularly by states participating in the National Fingerprint File (NFF) when they obtain fingerprints from subjects already on file that are of substantially better quality or include different characteristics than the existing ones, e.g., a new scar. The new fingerprints are submitted to the FBI for evaluation and inclusion in the FBI files.

Fingerprint Image Submissions (FIS) will use an FIS TOT. All 14 fingerprint images must be accounted for in the update request to verify identification and finger sequence. The FBI will determine whether to update the master fingerprint images. The processing flow for electronic requests to upgrade fingerprint images is illustrated in [Figure 13](#), “Electronic Requests to Upgrade Fingerprint Images.”

The FBI’s responses to fingerprint image submissions will provide upgrade results or indicate an error as follows:

| | |
|------------|---------------------------------------|
| <u>TOT</u> | <u>TRANSACTION</u> |
| FIS | Fingerprint Image Submission |
| <u>TOT</u> | <u>RESPONSE TRANSACTION</u> |
| FISR | Fingerprint Image Submission Response |
| ERRI | Image Transaction Error |

Deleted: Request: The types and quantities of logical records required to submit an image request are as follows:¶

- ¶
- ..X . 1 Type-1 header record¶
- ..X . 1 Type-2 record.¶
- ¶
- ..Response: The response to an image request will include the following logical records:¶
- ¶
- ..X . 1 Type-2¶
- ..X . 0-14 Type-4 or Type-14 fingerprint image records in the IRR transaction only¶
- ..X . 0-14 Type-9 features records corresponding to the requested images¶
- ..X . 0-8 Type-15 palmprint images¶
- ..X . 0-2 Type-17 iris images¶
- ..X . 0-1 Type-7 or Type-13 latent images.¶

Formatted: English (U.S.)

Deleted: Figure 7

3.7.1 Type of Transaction Definitions

3.7.1.1 Fingerprint Image Submission (FIS)

This transaction is used to submit electronic fingerprint images that are candidates for upgrading the FBI fingerprint image files. It is intended primarily for use by NFF states when it is determined that a second or subsequent arrest provides fingerprints of significantly better quality than those previously submitted to the FBI, or when it is determined there are new fingerprint characteristics such as scars or amputations. The transaction submits the new fingerprints to the FBI for evaluation and possible inclusion in the FBI files. All 14 fingerprints, rolled and plain, must be accounted for to verify the identification and confirm fingerprint positions. The mandatory and optional fields for the FIS TOT are summarized in Table I-1 and the Field Edit Specifications for the fields that are used may be found in Table C-1.

Deleted: The Logical Record Layout for the FIS TOT is given in Table I-4.

Deleted: 002


Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.7.1.2 Fingerprint Image Submission Response (FISR)

This transaction is returned by the FBI to acknowledge a valid fingerprint image submission and specify which finger image(s) were updated. The mandatory and optional fields for the FISR TOT are summarized in Table I-1 and the Field Edit Specifications for the fields that are used may be found in Table C-1.

Figure 13 Electronic Requests to Upgrade Fingerprint Images

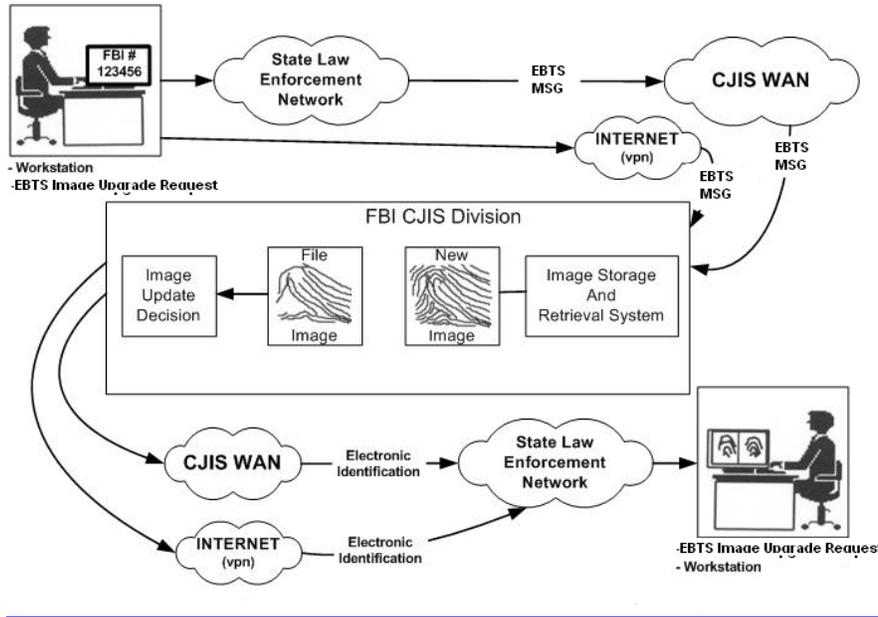

Deleted: The Logical Record Layout for the FISR TOT is given in Table I-5.

Formatted: Caption, Centered, Line spacing: single, Tabs: Not at -0.75" + -0.5" + 0" + 0.5" + 1" + 1.5" + 2" + 2.5" + 3" + 3.5" + 4" + 4.5" + 5" + 5.5" + 6" + 6.5" + 7" + 7.5" + 8"

Deleted: <sp>

Formatted: Keep with next, Keep lines together

Deleted: The Logical Record Layout for the ERRI (images) TOT is given in Table I-3.

Deleted: Submission: The types and quantities of logical records required to submit an electronic request to update fingerprint images are as follows:¶

¶ .X . . 1 Type-1 header record¶
 .X . . 1 Type-2 record¶
 .X . . 14 Type-4 or Type-14 fingerprint image records.¶

¶ Response: The response to an electronic request to update fingerprint images will include the following logical records:¶

¶ .X . . 1 Type-1 header record¶
 .X . . 1 Type-2 record.¶

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.7.1.3 Image Transaction Error (ERRI)

This transaction is returned by the FBI to indicate a transaction error. It includes a message field (MSG) indicating the type of error detected. Error responses are described in Section 3.8. The mandatory and optional fields for the ERRI TOT are summarized in Table I-1 and the Field Edit Specifications for the fields that are used may be found in Table C-1.

3.7.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

3.8 Error Message Format

When a transmission is rejected because a data field(s) does not pass internal editing criteria, an error response will be transmitted back to the submitting agency. Each reason for rejection will be detailed in the status/message (MSG) field. Up to 11 errors for a transaction can be recorded in the MSG field. MSG will contain an error description relating to the specific discrepancy identified. If the error is related to a field that contains invalid data, the field tag and first 30 characters of the data in the invalid field will be returned.

Errors in incoming transactions can be derived from many sources. IAFIS error handling capabilities will be an evolutionary product. In its initial version, IAFIS will recognize and deal with several hundred identified error conditions. Future versions of IAFIS will develop improved capabilities that support off-nominal or error conditions.

IAFIS will validate all incoming data prior to its use within the system. That is, all received and parsable fields will undergo an appropriate edit check. If any mandatory data are missing the transaction will be rejected. If any mandatory data are included but in error, then an attempt will be made to correct the values manually. If any optional data are in error, the data will be ignored.

The error response will be included in the ERRT, ERRA, ERRI, or ERRL transaction as appropriate. The following is a non-inclusive list of the types of error messages:

- X Mandatory field missing
- X Invalid field for transaction
- X Field discrepancy
- X Field out of range
- X Request not on file
- X Fingerprints do not allow extraction of characteristics
- X Non-standard native-mode fingerprint characteristics

The following are four unique types of error responses:

- X Tenprint Error Response (ERRT)
- X Latent Error Response (ERRL)
- X Image Error Response (ERRI)
- X Administrative Error Response (ERRA)

Formatted: Spanish (Spain-Modern Sort)

Appendix M contains further details on contents of the MSG field for error conditions.

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.9 Other Special Requirements for Communicating With IAFIS

3.9.1 Electronic Fingerprint Images

Electronic fingerprint images must be captured and transmitted to the FBI in accordance with the standard for the electronic interchange of fingerprint information, “ANSI/NIST-ITL 1-2007, American National Standard For Information Systems – Data Format for the Interchange of Fingerprint, Facial, & Scar Mark & Tattoo (SMT) Information,” dated April 20, 2007.

3.9.2 Fingerprint Image Compression/Decompression Algorithm

IAFIS-IC-0010(V3), IAFIS Wavelet Scalar Quantization (WSQ) Grayscale Fingerprint Image Compression Specification, dated December 19, 1997, provides the definitions, requirements, and guidelines for specifying the FBI’s WSQ compression algorithm. The document specifies the class of encoders required, decoder process, and coded representations for compressed image data. Latent images are not compressed.

The specification provides an informative overview of the elements of the algorithm. Refer to it for details.

ISO International Standard 10918-1, Information Technology – Digital Compression and Coding of Continuous Tone Still Images Part 1: Requirements and Guidelines, commonly known as the JPEG (The Joint Photographic Experts Group) algorithm, has been requested for use by the UK Home Office in submitting fingerprint images to IAFIS.

The FBI is responsible for maintaining a registry of approved compression algorithms and assigning a value to each. This value is to be used in the Type-4 or Type-14 Logical Record so the receiving agency can use the appropriate decompression algorithm to decode the image data. The Grayscale compression algorithm (CGA) field is a mandatory one-byte binary field used to specify the compression algorithm used (if any). A binary zero denotes no compression. The following table indicates the acceptable values for this field. The FBI expects 500 ppi scanned Type-4 or Type-14 tenprint images, as well as 500 ppi Type-15 palmprint images, to be compressed with compression algorithm type 1 (WSQ20) with a nominal compression ratio of 15-to-1 and Type-10 photo images to be compressed with compression algorithm type 2 (JPEG). Fingerprint and palmprint images scanned at 1000 ppi must be transcoded down to 500 ppi WSQ files in accordance with the Profile for 1000ppi Fingerprint compression Version 1.1 (http://www.mitre.org/work/tech_papers/tech_papers_04/lepley_fingerprint/lepley_fingerprint.pdf). The table will be updated when new algorithms are approved by the FBI.

Table 3-2 Compression Algorithm Values

| Compression Algorithm | Binary Value | ASCII Code |
|--------------------------|--------------|------------|
| None used (Uncompressed) | 0 | NONE |

Formatted: Default Paragraph Font, Font color: Blue

Deleted:

Deleted:

Deleted:

Deleted:

Deleted:

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

| | | |
|---|---|-------|
| Wavelet Scalar Quantization (WSQ) FBI Revision 2.0 | 1 | WSQ20 |
| JPEG ISO/IEC 10918 (Lossy) | 2 | JPEGB |
| JPEG ISO/IEC 10918 (Lossless) | 3 | JPEGL |
| JPEG 2K ISO/IEC 15444-1 (Lossy) | 4 | JP2 |
| JPEG 2K ISO/IEC 15444-1 (Lossless) | 5 | JP2L |
| Portable Network Graphics | 6 | PNG |

3.9.3 Fingerprint Image Quality Specifications

The IAFIS Image Quality Specifications are provided in Appendix F.

3.9.4 Fingerprint Image Size Requirements

The scanned fingerprint image sizes shown in the following table are consistent with standard fingerprint cards. To accommodate live-scan equipment, where the platen size can exceed these measurements, IAFIS will accept images larger than these. However, when oversized images are returned to a contributor, it is the receiver's responsibility to manage the display of these oversized images.

Table 3-3 Maximum Sizes for Fingerprint

| Fingerprint | Width pixels (inches) | Height pixels (inches) |
|---|--------------------------|---------------------------|
| Rolled Impression Fingers 1-10 (@ 500 ppi) | 800 (1.6) | 750 (1.5) |
| Rolled Impression Fingers 1-10 (@ 1,000 ppi) | 1,600 (1.6) | 1,500 (1.5) |
| Plain Thumb Impression (@ 500 ppi) | 500 (1.0) | 1,500 (3.0) |
| Plain Thumb Impression (@ 1,000 ppi) | 1,000 (1.0) | 3,000 (3.0) |
| 4 Finger Plain Impressions (@ 500 ppi) | 1,600 (3.2) | 1,500 (3.0) |
| 4 Finger Plain Impressions (@ 1,000 ppi) | 3,200 (3.2) | 3,000 (3.0) |

According to ANSI/NIST standards, the IAFIS will receive and store as part of a Tenprint Fingerprint Identification Search: 1,000 pixels per inch (ppi) images, Iris, Palmprint,

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

Photo, Supplemental Fingerprint and Palmprint data, and Type-99 Common Biometric Exchange File Format (CBEFF) biometric data record. At this time, the 1,000 ppi image will be converted to 500 ppi for IAFIS processing and return any subsequent images at 500 ppi. At which time the IAFIS will be able to process 1,000 ppi, the stored images may then be incorporated back into the IAFIS. Therefore, agencies are encouraged to submit 1,000 ppi images for IAFIS storage and collection purposes. The actual processing of 1,000 ppi images is a future capability associated with the FBI's Next Generation Identification (NGI) Program.

Deleted: ¶

Formatted: Font: Not Bold

3.10 Electronic Subject Photo Services

Electronic photo services include a transaction for requesting criminal or civil photo sets on file at the FBI and a transaction to delete photo sets. The file from which the photos are being requested is indicated by providing the appropriate value in the Name of Designated Repository (NDR) field in the Type-2 record.

To initiate a request for a photo set from the FBI's database, the sending agency electronically transmits the FBI number (in the future to be referred to as UCN, universal control number) and optionally a DOA (for criminal records) of the subject. This request will be routed by way of the CJIS WAN or the Internet to the FBI, processed, and returned to the requester via the same path. If the requester is a local agency, the request and response will be interfaced with the CJIS WAN through the state law enforcement network or the Internet. There will be no manual intervention on the part of the FBI.

Requests for a photo set will be submitted to the FBI under the CPR TOT (denoting Criminal or Civil Subject Photo Request) in the Type-1 record. The FBI's response will contain a PRR TOT (denoting "Photo Request Response") in the Type-1 record.

Requests for the deletion of Criminal or Civil Subject Photo Sets are initiated through the CJIS WAN or the Internet and returned through the same path. The request will be submitted to the FBI under the CPD TOT (denoting Criminal or Civil Subject Photo Image Delete Request) in the Type-1 record. The FBI's response will contain a PDR TOT in the Type-1 record.

The following TOTs are applicable for request for Criminal or Civil Subject Photo Images:

| <u>TOT</u> | <u>TRANSACTION</u> |
|------------|------------------------------|
| CPR | Subject Photo Request |
| CPD | Subject Photo Delete Request |

Deleted: 002

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

The FBI's response to requests for Criminal Subject Photo set images are as follows:

| <u>TOT</u> | <u>RESPONSE TRANSACTION</u> |
|------------|-----------------------------|
| PRR | Photo Request Response |
| PDR | Photo Delete Response |

3.10.1 Type of Transaction Definitions

3.10.1.1 Subject Photo Request (CPR)

This CPR TOT enables users to retrieve a criminal or civil photo set from the FBI repository. Each set of photos comprises photos of a subject posed from different views and/or Scars/Marks/Tattoos. Each photo set for a criminal record (identified by an FBI number) is linked to the subject by the date of arrest (DOA). In the future, photo sets for civil subjects will be linked to the UCN and will be stored by the date printed. The most recent frontal photo will be returned in the request as a default. The transaction will be processed, and the requester-selected photo set on file at the FBI will be transmitted in the response. If the request contains any errors, the response code (REC) will be set to "N." This response (PRR) will be returned, including the reason for the rejection in a response explanation field (EXP). The mandatory and optional fields for the CPR TOT are summarized in Table I-1 (from Table K-1) and the Field Edit Specifications for the fields that are used may be found in Table C-1.

Deleted: Table K-1 is the Logical Record Layout for the CPR TOT.

3.10.1.2 Subject Photo Delete Request (CPD)

This TOT of "CPD" transaction enables users to delete a specific photo set associated with a DOA. Only owners of that photo set may delete it. The requester specifies the FBI number of the subject and the DOA, or a subject record identifier. If the request contains any errors, the response code (REC) will be set to "N". This response (PDR) will be returned including the reason for the rejection in a Response Explanation field (EXP). The mandatory and optional fields for the CPD TOT are summarized in Table I-1 (from Table K-2) and the Field Edit Specifications for the fields that are used may be found in Table C-1.

Deleted: Table K-2 is the Logical Record Layout for the CPD TOT.

3.10.1.3 Photo Responses

There are responses for each of the requests. The PRR TOT is a response for a retrieve request and the PDR TOT is the response for the delete request. The two responses are handled in the same way. The transaction is returned by the FBI to indicate the condition of each request. There are two fields in this Type-2 record that give the condition of the request. If the request contains any errors that cannot be parsed: IAFIS will return an FBI=0000000; CRI=XXXXXXXXX; REC="N"; and a Response Explanation field, EXP= the translated message code of the first detected error. The mandatory and optional fields for the PRR and PDR TOTs are summarized in Table I-1 (from Tables K-3 and K-4) and the Field Edit Specifications for the fields that are used may be found in Table C-1.

Deleted: Tables K-3 and K-4 are the Logical Record Layouts for the PRR and PDR TOTs.

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.10.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

3.11 Latent Administrative Queries, Requests and Responses

Two types of administrative requests can be solicited by the users to improve the efficiency of their latent operations. They include the Latent Repository Statistics Query (LRSQ) and the Latent Search Status and Modification Query (LSMQ). LRSQ provides the users with the statistical representation of the FBI Criminal Master File used to estimate latent cognizant repository search penetration. The LSMQ will allow users to determine the status of one fingerprint search or multiple searches previously submitted by the requester's organization. The LSMQ also allows the user to adjust priorities, search order for performing the searches, or cancel previously submitted search requests.

The following TOTs are included in the Latent Administrative Queries:

| TOT | TRANSACTION |
|------|---|
| LRSQ | Latent Repository Statistics Query |
| LSMQ | Latent Search Status and Modification Query |

The following are the responses to the above transactions:

| TOT | RESPONSE TRANSACTION |
|------|--|
| LRSR | Latent Repository Statistics Response |
| LSMR | Latent Search Status and Modification Response |
| ERRA | Administrative Error Response |

3.11.1 Type of Transaction Definitions

3.11.1.1 Latent Repository Statistics Query (LRSQ)

The LRSQ requests the current statistics used to estimate the penetration of the Latent Cognizant Repository by a latent search based on the various input characteristics. This query will provide the users the data required to update the statistical representation used to estimate the repository penetration of a latent search without having to use the Latent Penetration Query defined in Section 3.4.1.5. The LRSQ TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

3.11.1.2 Latent Search Status and Modification Query (LSMQ)

Deleted: ¶
3.10.2.1 Photo Request ¶
 . **Request:** The types and quantities of logical records required to submit a subject photo request are as follows: ¶
 . X . . . 1 Type-1 header record ¶
 <#>1 Type-2 record. If the DOA is not supplied, the photo set with the latest "Date" ¶
 . photo taken" will be sent. ¶
 . **Response:** The response to a subject photo request will include the following logical records: ¶
 . X . . . 1 Type-1 header record ¶
 . X . . . 1 Type-2 (TOT=PRR) record ¶
 . X . . . 1-4 Type-10 image records. ¶
3.10.2.2 Photo Delete Request ¶
 . **Request:** The types and quantities of logical records required to submit a subject photo delete request are as follows: ¶
 . X . . . 1 Type-1 header record ¶
 . X . . . 1 Type-2 record. ¶
 . **Response:** The response to a subject photo delete request will include the following logical records: ¶
 . X . . . 1 Type-1 header record ¶
 . X . . . 1 Type-2 (TOT=PDR) record. ¶

Deleted: 6
Deleted: i
Deleted: s
Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

The LSMQ requests the status of one or multiple previously submitted latent fingerprint searches, requests the priority or order of searches be changed, or requests searches be canceled. Reprioritization cannot be requested in the same message as either reordering or cancellation of searches and should be requested if needed before reordering or cancellation. If the same message is used to both reorder and cancel searches, the entire reorder operation will be performed first, followed by the canceling operation. Therefore, if the canceled search date/time stamp is desired to be retained and exchanged with another search, the canceled search must be listed with the reordered searches as well as in the field listing searches to be canceled. To determine the current status of searches, the user will submit the case number(s) and extension(s) of the fingerprint search(es). The IAFIS response will include the AFIS segment process control number (SCNA) of the referenced search(es) and the estimated time(s) to complete the search(es). The LSMQ TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

For LSMQ information on multiple searches, the requester can define the depth of the query to be at the state level (defined as "S" in Field 2.004 (Query Depth of Detail (QDD)) in Appendix C); it will include all ORIs, all associated case numbers, and all associated case extension numbers. The request can also be at the ORI level (defined as "O") including all case numbers and associated extensions for a particular ORI or at the case level (defined as "C") including the case number and all associated extensions. The response will include the segment control numbers and estimated times to complete for all requested submittals. This transaction can also be used to change the priority of previously submitted searches (see definition of PRI in Appendix C). This request will list the segment control numbers of the searches (determined by previous status query) and their new priorities. In addition, the LSMQ provides the capability to change the order in which the requested searches are processed. A modified rank order of these searches is submitted by including the SCNA of each search in the order in which they are to be searched. AFIS/FBI will reorganize its queue for the requester for all searches that have not been completed or not currently being processed (*i.e.*, only those searches still pending). Finally, the LSMQ provides the capability to cancel a previously submitted search request by including in the Cancel Fingerprint Search field the SCNA of any search to be canceled.

Deleted: Table
Deleted: E-27

3.11.1.3 Latent Repository Statistics Response (LRSR)

LRSR to the LRSQ will provide the users the data required to update the statistical representation used to estimate the repository penetration of a latent search. The LRSR TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i
Deleted: s

Deleted: 002
Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"
Deleted: APRIL 1, 2008

3.11.1.4 Latent Search Status and Modification Response (LSMR)

The LSMR will provide the users with the list of previously submitted searches ranked in order for processing and their associated priorities in response to the request. A search already in progress will not be preempted. The LSMR will include the AFIS segment control number(s) (SCNA) of the referenced search(es) and the estimated time to complete the search(es). The LSMR will also provide notification that IAFIS has processed the cancellations. The SCNA of each search canceled will be returned in the CFS field. The LSMR TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Formatted: Keep lines together

Formatted: Keep with next, Keep lines together

Deleted: i

Deleted: s

3.11.1.5 Administrative Transaction Error (ERRA)

This transaction is returned by the FBI to indicate a transaction error. It includes a message field (MSG) indicating the type of error detected. Error responses are described in Section 3.8. The ERRA (Administrative) TOT is summarized in Table E-2. Edit specifications for the fields that are used may be found in Table C-1.

Deleted: i

Deleted: s

3.11.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

Formatted: Keep lines together

Formatted: Keep with next, Keep lines together

3.12 Palmprint Services (Future Capability)

In addition to the FBI accepting palmprints in conjunction with Major Case Print Collections (see Section 3.1.1.20). In the future, IAFIS will accept legacy palmprint cards for previously enrolled tenprint submissions unassociated with a particular arrest cycle at the time of their submission. Palmprint enrollment may be performed at any time, but each transaction must be for a single subject. To ensure that the palmprint records are associated with the proper tenprint record in IAFIS, the concurrent submission of a tenprint card is mandatory. The functionality provided at this time includes only the storage of palmprint images. In the future, a search capability against the palmprint database will also be provided. The specific criteria for palmprint enrollment are detailed in the following paragraphs.

Deleted: . Request: The types and quantities of logical records required to submit a latent administrative query are as follows:¶

¶ X . . 1 Type-1 header record¶
X . . 1 Type-2 record.¶

¶ . Response: The response to a latent administrative query will include the following logical records:¶

¶ <#>1 Type-1 header record¶
¶ <#>1 Type-2 record¶

Deleted: 3.12 Special Population Cognizant Files ¶

¶ This functionality is not supported by IAFIS and will not be supported in the future by NGI.¶

¶

Deleted: 3

Deleted: 3

Deleted: 3

3.12.1 Type of Transaction Definitions

3.12.1.1 Palmprint Enrollment (PPE) and Response (PPR) (Future capability)

In the future, the FBI will allow law enforcement agencies to enroll palmprints associated with previously enrolled tenprint records. To provide complete assurance that the palmprints are being associated with the proper records, in addition to providing the FBI number of the existing record, submissions must also be accompanied by electronic tenprint fingerprint images for verification. Only one record may be updated with palmprints by each transaction. Palmprint images may be submitted for additional records by submitting additional transactions. The response to this enrollment transaction will be a Palmprint Enrollment Request Response (PPR).

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

As new technology advances become available, other services will be added to the Palmprint Service for the maintenance and searching of palmprints.

3.12.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

Formatted: Keep lines together

Deleted: 3

Formatted: Keep with next, Keep lines together

3.13 Facial Recognition Services (Future Capability)

In the future, the Facial Recognition Service will allow authorized users to submit facial photo images of subjects of interest, whether in conjunction with a criminal arrest or in relation to a terrorist investigation. Facial photo images may be submitted either with the normal tenprint transaction or separately with this service. The Facial Recognition Service will provide enrollment, maintenance, and searches against the FBI Facial photo database.

Deleted: . Request: The types and quantities of logical records required to submit a Palmprint Enrollment Request transaction are as follows:¶

- ¶ . X . 1 Type-1 header record¶
- ¶ . X . 1 Type-2 record¶
- ¶ . X . 0-10 Type-4 or Type-14 fingerprint images (less than ten only for amputations)¶
- ¶ . . . bandaged/unable to print)¶
- ¶ . X . 1-8 Type-15 palmprint records.¶

¶ . Response: The response to a Palmprint Enrollment Request transaction will include the following logical records:¶

- ¶ . X . 1 Type-1 header record¶
- ¶ . X . 1 Type-2 record¶

3.14 Iris Services (Future Capability)

In the future, the Iris Services will allow authorized users to enroll iris images for subjects of interest, whether in conjunction with a criminal arrest or in relation to a terrorist investigation. Iris images not submitted with a normal tenprint transaction may be submitted for enrollment via a separately provided transaction (see 3.14.1 below). The Iris Service will provide enrollment, maintenance, and searches against the FBI Iris image database.

Deleted: 4

Deleted: 5

Deleted: 5

3.14.1 Type of Transaction Definitions

Deleted: 5

3.14.1.1 Iris Image Enrollment (IIE) and Response (IIER) (Future Capability)

Deleted: 5

As stated above, in the future, iris images may be submitted separately from a normal tenprint transaction by using the Iris Image Enrollment (IIE) request. To provide complete assurance that the iris images are being enrolled with the proper record, in addition to providing the FBI number of the existing record, submissions must also be accompanied by electronic tenprint fingerprint images for verification. An agency must have an MOU in place with the FBI prior to sending transactions that do not have fingerprint images attached. The iris images will be stored in an IAFIS database for future searching capability. IAFIS will respond with an Iris Image Enrollment Response (IIER) transaction to show successful receipt and storage of the iris images.

If the IIE transaction matches no FBI number given in the Type-2 record, an error response (ERRT) will be returned to the user.

Deleted: (see Table D-3)

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

3.14.2 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

3.15 Rap Back Services (Future Capability)

In the future, the Rap Back Service will provide authorized users the capability to enroll an individual and subscribe to "Rap Back" in order to receive notification of any subsequent criminal disposition and/or external system activity involving that individual. Under certain circumstances, this service will also provide authorized users the capability to receive notification when subsequent civil submissions are received. The Rap Back Service will also provide the users the capability to receive a prenotification to verify the individual is still of interest prior to releasing the notification.

The Rap Back Service will automatically provide notification of expungement information for those individuals enrolled in Rap Back. The Rap Back service will include subscription registration and maintenance (e.g., registering, unregistering), status checking, activity detection, response generation, and billing. Prior coordination with the FBI will be required prior to Rap Back enrollment.

3.15.1 Rap Back Enrollment Requests

3.15.1.1 Indirect Enrollment Requests (Future Capability)

Requests for Rap Back services will be facilitated through an optional Rap Back request field in the Type-2 record for electronic fingerprint identification submissions regarding individuals the submitting agency desires to enroll. After completion of the NGI design phase, a detailed list of acceptable TOTs will be added to this section. If Rap Back Services are requested for a civil submission, the agency must also request retention of the civil fingerprint or the Rap Back enrollment will be rejected. Rap Back record owners will have several options available, such as: designating a subscription expiration date; receiving a prenotification; monitoring criminal activity, disposition activity, civil activity (if authorized), external system activity; designating to not receive within state triggered events; and listing additional ORIs to receive Rap Back Notifications.

3.15.1.2 Direct Enrollment Requests (Future Capability)

For existing individual with fingerprints on file with the FBI, agencies may request Rap Back Services to be provided without resubmitting fingerprints by providing a valid UCN (although fingerprint images may be submitted with the request).

3.15.2 Rap Back Activity Notification (Future Capability)

In the event that a criminal or civil submission, disposition, or external system activity identifies an individual with an active Rap Back monitoring flag, a Rap Back activity notification

Formatted: Keep lines together

Deleted: 5

Formatted: Keep with next, Keep lines together

Deleted: Request: The types and quantities of logical records required to submit an Iris Image Enrollment Request transaction are as follows:¶

¶
.. X . 1 Type-1 header record¶
.. X . 1 Type-2 record¶
.. X . 1-10 Type-4 or Type-14 fingerprint images¶
.. X . 1-2 Type-17 iris image records.¶

¶
Response: The response to an Iris Image Enrollment Request transaction will include the following logical records:¶

¶
.. X . 1 Type-1 header record¶
.. X . 1 Type-2 record.¶

Deleted: 6

Deleted: is... service...allow ... so the authorized agency will...If not legally prohibited...allow ...cycles are added to an individual's record (... [44])

Deleted: "...i...and ...criminal transmission/routing, (... [45])

Deleted: 6

Formatted: Heading 4, Line spacing: single

Deleted: Rap Back Services

Formatted: Normal, Line spacing: single

Deleted: use of the...R...(2.052 RBR) field...criminal and civil...subjects ...the FBI ...retain and monitor...These submissions will be allowed with the tenprint transactions detailed in Section 3.1 above. ...Prior coordination with FBI is required for use of this field. When the RBR field is included in the transaction, the value in the retention field (2.005 RET) must also be "Y." If RET is populated with "N," the transaction will be rejected via the ERRT transac (... [46])

Formatted (... [47])

Formatted: Tabs: Not at 0.5"

Deleted: .

Deleted: 6...Type of Transaction Definitions¶ (... [48])

Deleted: n arrest record ...a ... (if requested) matches that of a subj (... [49])

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: 002...APRIL 1, 2008 (... [50])

will be sent to the Rap Back record owner and designated recipients. Prior coordination with the FBI will determine the type of notification agencies will receive. The FBI will send a Rap Back expiration notification to the Rap Back record owner 30 days prior to the designated subscription expiration date for each Rap Back enrollment, with an option to renew.

3.15.3 Rap Back Maintenance Request (Future Capability)

The Rap Back Service will provide opportunities for authorized agencies to modify, or delete, the Rap Back enrollment information. Agencies may modify the expiration date, discontinue the Rap Back Service, remove the civil fingerprint associated with the enrollment request, and modify Rap Back recipients.

3.15.4 Requirements for Logical Record Types

Text from this section is being removed as Tables L-3 and L-4 provide greater clarification of the allowed record types for each transaction.

3.16 Other Biometric Services (Future Capability)

The FBI, in consonance with the 2007 revision of the ANSI/NIST-ITL 1-2000 standard, will provide the users of its databases the capability to submit biometric data for which there is not yet an identified ANSI/NIST record type specifically designated. The revised standard defines the Type-99 record as the Common Biometric Exchange File Format (CBEFF).

The Type-99 tagged-field logical record shall contain and be used to exchange biometric data that are not supported by other ANSI/NIST-ITL logical records. These data are exchanged in a format that conforms to INCITS 398-2005, the Common Biometric Exchange File Format.

The CBEFF-conformant Biometric Information Record (BIR) used by the Type-99 logical record includes a common header and a Biometric Data Block (BDB). Two mandatory fields in the CBEFF header are Format Owner and Format Type. The Format Owner field denotes the vendor, standards body, working group, or industry consortium that has defined the format of the biometric data (the data contained in the BDB). A CBEFF requirement is that format owners register with the IBIA for an assigned identifier of the format owner. The values used in the Format Type field are assigned by the format owner and represent a specific BDB format as specified by the format owner. This may be a non-standard, unpublished data format or a data format that has been standardized by an industry group, consortium, or standards body. It is the combined CBEFF Format Owner/Format Type value that uniquely identifies the BDB format.

The Type-99 logical record provides the CBEFF fields necessary for users to send, receive, and interpret biometric data in any registered BDB format (with the exception of biometric data that are exchanged using the other logical records in this standard). The format of the data in the BDB field is identified by the field's BDB Format Owner and BDB Format Type as described by the CBEFF standard. The record layout of the ANSI/NIST-ITL 1-2007 Type-99 record is shown below.

Deleted: (RBHN)

Deleted: all ORIs listed as Rap Back Record owners of record in the Rap Back Record Owner (RBRO) field. The RBHN TOT is summarized in Table D-3. Edit specifications for the fields used may be found in Table C-1.

Deleted: 6

Deleted: 2.2 Rap Back Flag Delete Request (RBFd) (Future Capability)¶ Agencies may request that a Rap Back flag for a subject be deleted, resulting in a discontinuation of Rap Back monitoring, by submitting a Rap Back Flag Delete (RBFd) request. The Subject Record Identifier is a mandatory field. The response to an RBFd request will be a Rap Back Delete Response (RBDR) transaction. Failed requests (e.g., Subject Record Identifier does not exist) will be handled via the ERRT transaction. ¶

Note: This transaction may be rolled into RBM transaction detailed in 3.16.2.4, therefore this transaction may not be used after final design has been completed. ¶

[51]

Deleted: (RBM) and Response (RBMR)

Deleted: It is acknowledged that agencies desiring notification of [52]

Deleted: s

Deleted: the capability to

Deleted: change (i.e., add,

Deleted: , or replace)

Deleted: the ORIs to be notified of a positive hit

Deleted: The Rap Back Maintenance Request (RBM) will be used to p[53]

Deleted: 3.16.2.5 Rap Back Record Enrollment (RBRE) (Future [54]

Formatted: Keep lines together

Deleted: 6

Deleted: 3

Formatted: Keep with next, Keep lines together

Deleted: Request: The types and quantities of logical records requ[55]

Deleted: 7

Deleted: 002

Formatted: Tabs: 6.38", Right + Not at 4.63" + 5.72"

Deleted: APRIL 1, 2008

|

| IAFIS-DOC-01078-8.1

57

XXXXX 99, 9999

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

APPENDIX A

TRANSACTION PRIORITIES

Incoming electronic transactions to IAFIS must have a means to identify the required priority. The ANSI standard establishes nine priority levels in the Transaction Priority (PRY) field of the Type-1 record. The EBTS will use this field to identify the relative processing priority of incoming transactions (Level 1 is the highest priority). The assignment of priorities will be as follows:

Table A-1. Priorities

| Level 1 – Rapid | Level 2 – Urgent Criminal | Level 3 – High Civil⁹ | Level 4 – Routine Criminal | Level 5 – Secondary Criminal | Level 6 – Routine Civil³ | Level 7 – Non-Urgent⁹ | Level 8 – Extended⁹ | Level 9 – Delayed Non-Urgent |
|------------------------|----------------------------------|---|-----------------------------------|-------------------------------------|--|---|---------------------------------------|-------------------------------------|
| 10-second avg response | 2-minute avg response | 15-minute avg response | 15-minute avg response | 2-hour avg response | 24-hour avg response | Next business day | 5 business days | 30-day avg response |
| RPIS ⁸ | TPIS | NFUE | CAR | FIS ² | IRQ ⁵ | CPD | NFAP | CPNU |
| | TPFS | NFAP | CNA | IRQ ⁵ | NFAP | CPR | FANC | |
| | TPRS ⁷ | FANC | AMN | CFS ⁴ | FANC | IRQ ⁶ | FAUF | |
| | | FAUF | DEK | ELR ⁴ | FAUF | IIE | NFUF | |
| | | NFUF | DEU | LFIS ⁴ | NFUF | FNDR | MAP | |
| | | MAP | MPR | LFFS ⁴ | MAP | NNDR | | |
| | | NFUE | CPDR | LFS ⁴ | | DSPE | | |
| | | | | LPNQ | | MAP [▼] | | |
| | | | | LRSQ | | NFUE [▼] | | |
| | | | | LSMQ | | PPE | | |
| | | | | MCS ⁴ | | FVR | | |
| | | | | ULAC | | FANC | | |
| | | | | ULD | | FAUF | | |
| | | | | ▼ | | ▼ | | |
| | | | | ▼ | | ▼ | | |
| | | | | ▼ | | ▼ | | |

- Deleted: RBRE
- Deleted: RBFD
- Deleted: RBM
- Deleted: SPCA
- Deleted: SPCD
- Deleted: SPCM
- Deleted: NFUF
- Deleted: ULAC
- Deleted: MAP
- Deleted: ULD
- Formatted: Tabs: 8.5", Right + Not at 3" + 5.72"
- Deleted: 002
- Deleted:
- Deleted: APRIL 1, 2008

- 1 Reserved.
- 2 Tenprint fingerprint data files shall be updated within two hours of the update decision.
- 3 Default value for Civil transactions will be set to Level 6 – Routine if not specified by the originator.
- 4 Latent submission responses and latent search responses shall be transmitted within one day after initiation of search on IAFIS. Latent responses (*i.e.*, LSR, NAR, ULM) for electronic submissions and responses (*i.e.*, SLR) will be transmitted for the latent searches shown above.
- 5 The response time for retrieval of 100 or fewer fingerprint images shall not exceed one day. The response is transmitted in individual messages.
- 6 The response time for retrieval of 101 to 1,000 fingerprint image sets may exceed 24 hours. The response is transmitted in individual messages.
- 7 For limited use. The response time shall be two minutes or less from time of receipt by IAFIS for 90 percent and three minutes for 100 percent.
- 8 Response time for RPIS transactions shall not exceed an average of ten seconds (measured from the time received at the CJIS WAN or the Internet to the time sent back through the CJIS WAN or the Internet).*
- 9 The Priority for Civil TOTs will be set by the submission originator. Use of Priority 3 High Civil must be requested and approved by the FBI.

*The RPIS transactions are the only submissions initially received by IAFIS RISC.

Reassignment of priorities may be made based on workload conditions and special processing requests. Reassignment has no effect if IAFIS is not busy. An example of a valid reassignment would be a Criminal Tenprint Submission (No Answer Necessary) transaction that is normally a 15-minute turnaround but can be reassigned (or submitted at higher priority) to Level 2 because the contributor is not affected. Additionally, urgent Level 4s may be received, in which case they are reassigned to Level 2 for such cases as certain AMN or special unknown deceased.

Formatted: Tabs: 6.25", Right +
Not at 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

APPENDIX B

DESCRIPTORS AND FIELD EDIT SPECIFICATIONS FOR TYPE-1 LOGICAL RECORDS

The following paragraphs describe the data contained in fields for the Type-1 logical record. Each field shall begin with the number of the record type, followed by a period, followed by the appropriate field number, followed by a colon. Multiple information items within a field or subfield shall be separated by the $\frac{U}{S}$ separator; multiple subfields shall be separated by the $\frac{R}{S}$ separator; and information fields shall be separated by the $\frac{G}{S}$ separator. Immediately following the last information field in the Type-1 logical record, an $\frac{F}{S}$ separator character shall be used to separate it from the next logical record. Table B-2 summarizes the content of each of the fields in the Type-1 record. The information in this appendix has been taken directly from the ANSI Standard, *Data Format for the Interchange of Fingerprint, Facial & Scar Mark & Tattoo (SMT) Information (ANSI/NIST-ITL 1-2007)*. Any information that is underlined is the FBI-specific requirements.

CNT 1.003 – File content. This **mandatory** field shall list each of the logical records in the logical file by record type. It also specifies the order in which the remaining logical records shall appear in the logical file. It shall consist of one or more subfields. Each subfield shall contain two information items describing a single logical record found in the current logical file. The subfields shall be entered in the same order in which the logical records shall be transmitted. When more than one subfield is used, the $\frac{R}{S}$ separator character shall be entered between the subfields. With the addition of the Type-10 record, the first information item of each subfield may now be a one- or two-digit integer (giving the logical record type). The remaining edit specifications pertaining to CNT are unchanged.

Deleted: RS

The first subfield shall relate to this Type-1 transaction record. The first information item within this subfield shall be the single character indicating that this is a Type-1 record consisting of header information (the numeral "1" selected from the ANSI Standard Table 4).

The second information item of this subfield shall be the sum of the Type-2 plus Type-3 plus Type-4 plus Type-5 plus Type-6 plus Type-7 plus Type-8 plus Type-9 plus Type-10 plus Type-13 plus Type-14 plus Type-15 plus Type-17 plus Type-99 records contained in this logical file. This number is also equal to the count of the remaining subfields of Field 1.03. The $\frac{U}{S}$ separator character shall be entered between the first and second information items.

The remaining subfields of Field 1.03 pertaining to Type-2, Type-3, Type-4, Type-5, Type-6, Type-7, Type-8, Type-9, Type-10, Type-13, Type-14, Type-17, and Type-99 records contained in the file shall each be composed of two information items. The first information item shall be one or two characters chosen from the ANSI Standard Table 4, which states the record type. The second information item shall be the IDC associated with the logical record pertaining to that subfield. The IDC shall be a positive integer equal to or greater than zero. The $\frac{U}{S}$ character shall be used to separate the two information items. (Only Type-1, Type-2, Type-4,

Formatted: Tabs: 6.25", Right +
Not at 3" + 5.72"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

B-1

XXXXX 99, 9999

Type-7, Type-9, Type-10, Type-13, Type-14, Type-15, Type-16 Type-17, and Type-99 records will be accepted by the FBI.)

DAI 1.007 – Destination Agency Identifier. This **mandatory** field shall contain the identifier of the administration or organization designated to receive the transmission. The size and data content of this field shall be defined by the user and be in accordance with the receiving agency. This field shall be a nine-byte alphanumeric field.

DCS 1.015 – Directory of Character Sets. This optional field is a directory or list of character sets other than 7-bit ASCII that may appear within this transaction. This field shall contain one or more subfields, each with three information items. The first information item is the three-character identifier for the character set index number that references an associated character set throughout the transaction file. The second information item shall be the common name for the character set associated with that index number. The optional third information item is the specific version of the character set used. In the case of the use of UTF-8, the third optional information item can be used to hold the specific version of the character set used with UTF-8 so that the display terminal can be switched to the correct font family. The table below is copied from the ANSI/NIST standard and lists the reserved named character sets and their associated three-character index numbers. The character shall separate the first information item from the second and the second from the third. The separator character shall be used between the subfields.

- Deleted: T
- Deleted: B-1 which
- Deleted:
- Deleted: US
- Deleted: RS
- Deleted: Table B-1

Directory of Character Sets

| Character Set Index | Character Set Name | Description |
|---------------------|--------------------|-----------------------------------|
| 000 | ASCII | 7-bit English (Default) |
| 001 | ASCII | 8-bit Latin |
| 002 | UNICODE | 16-bit |
| 003 | UTF-8 | 8-bit |
| 004-127 | ----- | Reserved for ANSI/NIST future use |
| 128-999 | ----- | User-defined character sets |

DOM 1.013 – Domain Name. This optional field identifies the domain name for the user-defined Type-2 logical record implementation. If present, the domain name may only appear once within a transaction. It shall consist of one or two information items. The first information item will uniquely identify the agency, entity, or implementation used for formatting the tagged fields in the Type-2 record. An optional second information item will contain the unique version of the particular implementation. The default value for the field shall be the North American Domain implementation and shall appear as “1.013:NORAM{US}{GS}”.

- Deleted: YY
- Deleted: YY
- Formatted: Tabs: 6.25", Right + Not at 3" + 5.72"
- Deleted: 002
- Deleted:
- Deleted: APRIL 1, 2008

DAT 1.005 – Date. This **mandatory** field shall contain the date that the transaction was initiated. The date shall appear as an eight-digit number in the format CCYYMMDD. The CCYY characters shall represent the year of the transaction; the MM characters shall be the tens

IAFIS-DOC-01078-8.1

B-2

XXXXX 99, 9999

and units values of the month; and the DD characters shall be the day in the month. For example, 19920601 represents June 1, 1992. The date of submission shall not exceed the current date except when the submission originates from an international contributor located in a time zone that is earlier than the Eastern Time Zone. This date field shall contain the local date for the region submitting the request. Edit checks on the IAFIS will accept the local date as valid up to one day forward (24 hours) to accommodate the variance between international time zones.

GMT 1.014 – Greenwich Mean Time. This optional field provides a mechanism for expressing the date and time in terms of universal Greenwich Mean Time (GMT) units. If used, the GMT field contains the universal date that will be in addition to the local date contained in Field 1.005 (DAT). Use of the GMT field eliminates local time inconsistencies encountered when a transaction and its response are transmitted between two places separated by several time zones. The GMT provides a universal date and 24-hour clock time independent of time zones. It is represented as “CCYYMMDDHHMMSSZ,” a 15-character string that concludes with a “Z.” The “CCYY” characters shall represent the year of the transaction, the “MM” characters shall be the tens and units values of the month, and the “DD” characters shall be the day of the month; the “HH” characters represent the hour, the “MM” the minute, and the “SS” represents the seconds. The complete date shall not exceed the current date.

Deleted: YY

LEN 1.001 – Logical Record Length. This mandatory ASCII field shall contain the total count of the number of bytes in this Type-1 logical record. Field 1.01 shall begin with “1.01:” followed by the length of the record including every character of every field contained in the record and the information separators. The number of characters added to the record by the LEN field itself shall be included in calculating the value of LEN.

NSR 1.011 – Native Scanning Resolution. This mandatory field shall specify the nominal scanning resolution of the AFIS or other image capture device supported by the originator of the transmission. This field permits the recipient of this transaction to send respond data at a transmitting resolution tailored to the NSR (if it is able to do so) or to the minimum scanning resolution. This field shall contain five bytes specifying the native scanning resolution in pixels per millimeter. The resolution shall be expressed as two numeric characters followed by a decimal point and two more numeric characters (*e.g.*, 20.00). This field is needed because the interchange of fingerprint information between systems of the same manufacturer may, in some instances, be more efficiently done at a transmitting resolution equal to the native scanning resolution of the system rather than at the minimum scanning resolution specified in this standard. This field applies only to fingerprint image data. For those logical files that contain only Type-10 image records, this field shall be set to “00.00.”

NTR 1.012 – Nominal Transmitting Resolution. This mandatory field shall specify the nominal transmitting resolution for the image or images being transmitted. This field shall contain five bytes specifying the transmitting resolution in pixels per millimeter. The resolution shall be expressed as two numeric characters followed by a decimal point and two more numeric characters (*e.g.*, 20.00). The transmitting resolution shall be within the range specified by the transmitting resolution requirement. This field applies only to fingerprint image data. For those logical files that contain only Type-10 image records, this field shall be set to “00.00.”

Formatted: Tabs: 6.25", Right +
Not at 3" + 5.72"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

B-3

XXXXX 99, 9999

ORI 1.008 – Originating Agency Identifier. This **mandatory** field shall contain the identifier of the administration or organization originating the transaction. The size and data content of this field shall be defined by the user and be in accordance with criteria specified by the receiving agency. For EBTS purposes, this field shall be a nine-byte alphanumeric field. The first two characters shall be a valid POB code, and the entire ORI shall validate to an NCIC-authorized ORI. **Note:** In a submission to the FBI, the submitting agency (usually the CJIS Systems Agency (CSA)) is the **ORI** and the FBI is the **DAI**, while the FBI’s response to the submission will show the FBI as the **ORI** and the submitting agency as the **DAI**. (See also Appendix C for the definition of **CRI**.)

PRY 1.006 – Transaction Priority. When this optional field is used, it shall contain a single information character to designate the urgency with which a response is desired. The values shall range from 1 to 9, with “1” denoting the highest priority. The default value shall be “9” if no value is indicated. (See Appendix A for interpretation of the various priority values.)

TCN 1.009 – Transaction Control Number. This **mandatory** field shall contain the Transaction Control Number as assigned by the originating agency. A unique control identifier shall be assigned to each transaction. For any transaction that requires a response, the respondent shall refer to this identifier in communicating with the originating agency. This field shall be a 10- to 40-byte alphanumeric-special (ANS) field.

TCR 1.010 – Transaction Control Reference. This field shall be used in responses only to refer to the Transaction Control Number of a previous transaction involving an inquiry or other action that required a response. This field is **mandatory** for such responses. This field shall be a 10- to 40-byte alphanumeric-special (ANS) field.

TOT 1.004 – Type of Transaction. This **mandatory** field shall contain an identifier, designating the type of transaction and subsequent processing that this logical file should be given.

VER 1.002 – Version Number. This **mandatory** four-byte ASCII field shall be used to specify the version number of the ANSI Standard for Information Systems, ANSI/NIST-ITL 1-2007, *Data Format for the Interchange of Fingerprint, Facial, & Scar Mark & Tattoo (SMT) Information*, implemented by the software or system creating the file. The format of this field shall consist of four numeric characters. The first two characters shall specify the major version number. The last two characters shall be used to specify the minor revision number. The initial revision number for a version shall be “00.” The original 1986 standard would be considered the first version or “0100.” The entry in this field for this 1993 approved standard shall be “0200.” With the addition of the Type-10 logical record by the Addendum to the ANSI Standard, *Data Format for the Interchange of Fingerprint, Facial, & SMT Information (ANSI/NIST-ITL 1a-1997)*, the entry in this field shall be “0201.” For transactions compliant with the ANSI/NIST-ITL 1-2007, the version shall be “0400.”

| |
|--|
| Formatted: Tabs: 6.25", Right + Not at 3" + 5.72" |
| Deleted: 002 |
| Deleted: |
| Deleted: APRIL 1, 2008 |

Table B-1. Field List for Type-1 (Transaction) Logical Records

Deleted: 2

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size per Occurrence | | Occurrences | | Max. Bytes Including Character Separators & Field No. | Example Data | Special Characters Allowed |
|------------|-----------|-----------|---------------------------------|----------------|---------------------------|------|-------------|------|---|--|---|
| | | | | | Min. | Max. | Min. | Max. | | | |
| LEN | M | 1.001 | LOGICAL RECORD LENGTH | N | 3 | * | 1 | 1 | * | 1.001:230<GS> | |
| VER | M | 1.002 | VERSION | N | 5 | 5 | 1 | 1 | 11 | 1.002:0400<GS> | |
| CNT | M | 1.003 | FILE CONTENT | N | 4 | 6 | 2 | * | * | 1.003:1<US>15<RS>2<US>00<RS>4<US>01<RS>4<US>02<RS>4<US>03<RS>4<US>04<RS>4<US>05<RS>4<US>06<RS>4<US>07<RS>4<US>08<RS>4<US>09<RS>4<US>10<RS>4<US>11<RS>4<US>12<RS>4<US>13<RS>4<US>14<GS> | |
| TOT | M | 1.004 | TYPE OF TRANSACTION | A | 4 | 5 | 1 | 1 | 11 | 1.004:CAR<GS> | |
| DAT | M | 1.005 | DATE | N | 9 | 9 | 1 | 1 | 15 | 1.005:20080327<GS> | |
| PRY | O | 1.006 | TRANSACTION PRIORITY | N | 2 | 2 | 0 | 1 | 8 | 1.006:1<GS> | |
| DAI | M | 1.007 | DESTINATION AGENCY | AN | * | * | 1 | 1 | * | 1.007:DCFBWA6Z<GS> | |
| ORI | M | 1.008 | ORIGINATING AGENCY IDENTIFIER | AN | * | * | 1 | 1 | * | 1.008:NY0303000<GS> | |
| TCN | M | 1.009 | TRANSACTION CONTROL NUMBER | ANS | * | * | 1 | 1 | * | 1.009:1234567890<GS> | Any printable 7-bit ASCII character is allowed. |
| TCR | O | 1.010 | TRANSACTION CONTROL REFERENCE | ANS | * | * | 0 | 1 | * | 1.010:1234567890<GS> | Any printable 7-bit ASCII character is allowed. |
| NSR | M | 1.011 | NATIVE SCANNING RESOLUTION | NS | 6 | 7 | 1 | 1 | 13 | 1.011:20.00<GS> | Period allowed. |
| NTR | M | 1.012 | NOMINAL TRANSMITTING RESOLUTION | NS | 6 | 7 | 1 | 1 | 13 | 1.012:20.00<GS> | Period allowed. |
| DOM | O | 1.013 | DOMAIN NAME | AN | * | * | 0 | 1 | * | 1.013:NORAM<GS> | |
| GMT | O | 1.014 | GREENWICH MEAN TIME | AN | 16 | 16 | 0 | 1 | 22 | 1.014:20061025132400Z<GS> | |
| DCS | O | 1.015 | DIRECTORY OF CHARACTER SETS | ANS | * | * | 0 | * | * | 1.015:003<US>UTF-8<FS> | |

Deleted: T

* No limits defined. Under the Condition column: O = optional; M = mandatory; C = conditional; see notes. Under the character type column: A = alpha; B = binary; N = numeric; S = special characters.

Deleted: 002

Formatted: Tabs: 8.75", Right + Not at 3" + 5.72"

Deleted: APRIL 1, 2008

APPENDIX C

DESCRIPTORS AND FIELD EDIT SPECIFICATIONS FOR TYPE-2 LOGICAL RECORDS

1.0 User-Defined Data

Table C-1 summarizes the content of each of the fields in the Type-2 record. The field sizes do not account for any separator characters. The max byte count does account for any separator characters, § and § separators for multiple fields for an element and § separator used for the end of the element marker.

Deleted: However,

Deleted: the byte counts

Some Type-2 elements have their origins as contributor-supplied data. User-defined data is that subset of contributor-supplied data that will not be stored in any IAFIS files for later search or retrieval purposes. User-defined data will not be validated (with several exceptions), and therefore may in general consist of any printable 7-bit ASCII character: *i.e., free text*. This includes the ASCII (decimal) codes 07 (BEL) through 13 (CR) and 32 (SP) through 127 (DEL), inclusive. Separator characters are not part of the printable character set.

The following list gives those Type-2 elements that the FBI treats as being user-defined: ATN, SCO, OCA, SID, OCP, EAD, RES, CRI, IMA, and TAA. In this list, SID and CRI may not always be free-text. In criminal transactions, these fields must contain valid formats, as specified further in this appendix. Occasional other restrictions are specified as required in this data dictionary. If the contributor supplies data in any of these fields in a submission or search, those data will be returned in the corresponding response.

The RAP, RET, REC, TAA, and ULF are flag fields taking values positive = "Y" and negative = "N." The negative value should not, in general, be submitted unless otherwise described in a specific definition.

1.1 Date Fields

Deleted: 2

Date fields are in accordance with that requirement. In general, the format for date fields is the following:

- A date is shown as an 8-digit numeric field of the format CCYYMMDD, where:
- CC (Century) must be 19 or 20
- YY (Year) must be 00 to 99
- MM (Month) must be 01 to 12
- DD (Day) must be 01 to the limit defined by the month and year (*e.g.*, DD may be 29 for MM = 02 in leap years).

Formatted: Bulleted + Level: 1 + Aligned at: 0.25" + Tab after: 0.5" + Indent at: 0.5"

For example 19921201 represents December 1, 1992.

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-1

XXXXX 99, 9999

Since dates find a variety of uses in EBTS transactions, each use may have specific format restrictions or special edits. For specific format restrictions or special edits, see the individual date field entries in this appendix.

2.0 Data Dictionary

ACN 2.071 – Action to be Taken. This field is used to include text answers to submission requests to indicate that a latent case will be established or to indicate recommendations for further actions in either latent or tenprint responses. In response to Rapid Print Image Searches (RPIS), additional information will be provided regarding red or yellow values in the SRF field. This field will also be used to indicate action taken by the FBI in response to electronic document (e.g., disposition) submissions. Commas, hyphens, ampersands, slashes, number signs, and blanks are all allowed as special characters.

AGR 2.023 - Age Range. An estimated age range may be entered using a pair of two-digit numbers. The first two digits shall represent the minimum age, and the second two the maximum age. There shall be no separator character used between the ages.

AKA 2.019 – Aliases. This 3-to-30 alpha-numeric special (ANS) field contains alias names of the subject. Up to ten aliases may be provided, separated from one another by the R_S character. AKA may contain a comma, hyphen, or blank as special characters. The format shall be the surname followed by a comma (,), followed by the given name(s) separated by a space. The following restrictions and exceptions to the general format apply:

1. Minimum length is three bytes in the following sequence: alpha or ampersand, comma, alpha.
2. A comma must be followed by a minimum of one alpha character.
3. A blank before or after comma is invalid.
4. A hyphen in first and last position of any name segment is invalid.
5. Two consecutive blanks or hyphens between characters are invalid.

Formatted: Bullets and Numbering

AMP 2.084 – Amputated or Bandaged. This grouped field contains information about amputated or bandaged fingerprints in an EBTS submission. It is composed of two subfields, Finger Position (FGP), and Amputated Or Bandaged Code (AMPCD). The two-character finger position code is followed by the U_S separator and the amputated or bandaged code. Multiple fingers shall be separated by the R_S separator. This field is to be used any time there are fewer than ten printable fingers in a tenprint submission. A partially scarred finger should be printed and be marked amputated, XX. If the finger's image is missing for any reason, (for example, when the arresting agency did not specify a reason in its submission to the State Identification Bureau), the UP code should be used. This field is used to tell AFIS which finger positions need to be characterized. The UP code should be used for all missing or no image provided for fingerprints in the submission that AFIS should ignore and not include in the matching process. Two characters represent each finger number as follows:

Deleted: forwarding agency is not sure of the reason a

Deleted: ,

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-2

XXXXX 99, 9999

| <u>Finger Position</u> | <u>FGP</u> |
|------------------------|------------|
| Right thumb | 01 |
| Right index | 02 |
| Right middle | 03 |
| Right ring | 04 |
| Right little | 05 |
| Left thumb | 06 |
| Left index | 07 |
| Left middle | 08 |
| Left ring | 09 |
| Left little | 10 |

The following is a list of allowable indicators for the AMPCD:

| <u>Descriptor</u> | <u>AMPCD</u> |
|----------------------------------|--------------|
| Amputation | XX |
| Unable to print (e.g., bandaged) | UP |

The following example indicates that the third finger is amputated and that the ninth finger print was unavailable or not submitted.

2.084:03^U_SXX^R09^U_SUP^G

ASL 2.047 – Arrest Segment Literal. This field is made up of the Date of Offense (DOO) and the Arrest Offense Literal (AOL). The AOL is a free text description of an offense charged on an arrest. The first character of the AOL text must not be blank. Each AOL should have a corresponding date (DOO) if available. The DOO shall appear as an eight-digit number as specified in Section 1.2 of this appendix. The DOO shall not exceed the current date except when the submission originates from an international contributor located in a time zone earlier than the Eastern Time Zone. This date field shall contain the local date for the region submitting the request. Edit checks on the IAFIS will accept the local date as valid up to 24 hours to accommodate the variance between international time zones. Up to 40 occurrences of the ASL are allowed. Each occurrence of the ASL shall be separated by the ^R_S separator character. The DOO shall be separated from the AOL by the ^U_S separator character. A DOO is prohibited without a corresponding AOL offense. If a DOO is not present, a ^U_S character separator shall still be used.

The following is an example of more than one occurrence of the AOL field using DOO:

2.047:19940915^U_SDUI^R19940920^U_SPOSSESSION OF FIREARMS^G

Formatted: Keep with next, Keep lines together

Formatted Table

Formatted: Keep with next, Keep lines together

Formatted Table

Deleted: 002

Deleted: APRIL 1, 2008

ATN 2.006 – “Attention” Indicator. This alphanumeric-special field shall contain a designation of the individual to whose attention a response is to be directed. Periods shall not be used (*e.g.*, Det. J. Q. Public shall be entered as DET J Q PUBLIC). The value of ATN returned to the submitter is the value submitted.

CAN 2.064 - Candidate List. This grouped field shall contain a candidate list. It is composed of two subfields—Universal Control Number (UCN) and Name (NAM)—separated by a ^U_S separator and will be provided for each candidate in the list. Commas, hyphens, and blanks are allowed in the NAM subfield as specified in the NCIC Code Manual. Each UCN and NAM set shall be separated from the next by the ^R_S separator character.

Note: The UCN can contain an FBI number (FNU) if appropriate for that record.

CCN 2.094 – Court Case Number. (Future Capability) This is a unique number assigned by the state or federal court system to identify a specific court event occurrence in a subject criminal history record. The CCN is an optional element that may assist in matching the submitted disposition data to the correct court cycle. If present in the submission, this field should be returned in the response. Any printable 7-bit ASCII character with the exception of a period (.) is acceptable. Embedded blanks are not permitted. A CCN must not begin with a blank.

CFS 2.077 – Cancel Fingerprint Search. This field will contain the information required to cancel a latent fingerprint search previously submitted to IAFIS. This field will contain unique identifier numbers (AFIS/FBI uses the AFIS Segment Process Control Number) for all searches to be canceled. The response to this request will contain the same information for all searches that were canceled. Only searches that are still pending will be canceled (searches completed or in-progress may not be canceled).

CIN 2.010 – Contributor Case Identifier Number. This grouped free-text field is a 48-byte (maximum) alphanumeric-special assigned by the contributor to uniquely identify a latent case. It consists of a literal subfield Contributor Case Prefix (CIN_PRE) of up to 24 characters (*e.g.*, “Incident #,” “Laboratory Number,” “Investigation No.”), followed by the ^U_S separator and the Contributor Case Identifier subfield (CIN_ID) of up to 24 characters.

CIX 2.011 – Contributor Case Identifier Extension. This field is a two-byte to four-byte numeric supplement to the Case Identifier Number that allows multiple searches to be associated with the same case. The CIX shall be used only in conjunction with the CIN.

CRI 2.073 – Controlling Agency Identifier. In Criminal and Civil transactions, the first instance of this field shall contain the originating agency identifier (ORI) of the organization controlling the transaction when that organization is different than the one submitting the transaction (*e.g.*, the CJIS Systems Agency, or CSA). When the controlling agency has the same ORI as the CSA, both the ORI and CRI fields shall be submitted with the same identifier. In criminal transactions, the CRI will usually refer to the booking station that has submitted the subject’s fingerprint card or photo to be transmitted through the CSA to the FBI. For Civil submissions, this field may be user-defined in accordance with predefined parameters and must

Deleted: 002

Deleted: APRIL 1, 2008

be validated through the field specification edits and the format of an NCIC-authorized ORI. The FBI uses the first instance of CRI in any transaction that would modify criminal records as the authority to do so. When a Civil transaction is Ident to a criminal subject and the first instance of the submitted CRI is not an authorized ORI, the ORI of the State Identification Bureau that submitted the transaction will be used in its stead. The second and third instances of CRI, when sent, are treated as user-defined fields. (See also Appendix B for definitions of ORI and DAI.) The CRI returned is otherwise the same as was submitted unless the submitting agency has used a deleted or retired CRI, in which case its replacement will be used. For EBTS purposes, this field shall be a nine-byte alphanumeric field. The first two characters shall be a valid alpha-character POB code, which represents the state or country in which the agency is located, and the entire CRI shall validate to an NCIC-authorized ORI. For federal agencies, the first two characters should coincide with its respective headquarters or office ORI. If an agency is submitting for an entity outside of its respective state, the channeling agency need only ensure that submitted CRIs represent valid ORIs that have been added to the IAFIS Computerized Contributor Address file.

Deleted: If, in
 Deleted: ,
 Deleted: there
 Deleted: Ident against the

CRN 2.085 – Civil Record Number. A unique identifier assigned to each Civil Subject Record.

CSF 2.2006 – Cascaded Search Flag. (Future Capability) This two-digit alpha field is used to flag a Special Population Cognizant (SPC) File record of interest that is to be subjected to cascaded searches from the Criminal File (CR), the Civil File (CI), or Both (BO). In the event a cascaded search record hits a flagged record, a separate response will be sent to the owner (ORI) of the SPC File for candidate image comparison.

CSL 2.051 – Court Segment Literal. The CSL field is made up of the Court Disposition Date (CDD), the Court Offense Literal (COL), and the Other Court Sentence Provision Literal (CPL). The CDD is the date a court count was disposed of by the court. The CDD shall appear as an eight-digit number as specified in Section 1.2 of this appendix. The CDD shall not exceed the current date except when the submission originates from an international contributor located in a time zone earlier than the Eastern Time Zone. This date field shall contain the local date for the region submitting the request. Edit checks on the IAFIS will accept the local date as valid up to 24 hours forward to accommodate the variance between international time zones.

The COL contains free text description of an offense charged in a court count. The first character of the COL must not be a blank. The CPL contains free-text information on sentence provisions. Up to 40 occurrences of the CSL are allowed. Each occurrence of the CSL shall be separated by the ^R_S separator character. A CDD (if available), followed by a COL, followed by a CPL, each separated by a ^U_S separator character must be present for each occurrence of the CSL field. If the CDD is not available, a ^U_S separator character alone shall be used immediately after the field tag or preceding ^R_S separator character. The COL and CPL are always mandatory. When a provision (CPL) is included, then the date the provision was made (CDD) may optionally be given.

The following is an example of the CSL with multiple occurrences:

IAFIS-DOC-01078-8₁ C-5 XXXXX 99, 9999

Deleted: 002
 Deleted: APRIL 1, 2008

2.051:19940930^U§DUI^U§5 DAYS JAIL, PAY COURT COSTS^R19940930^U§POSSESSION OF FIREARMS^U§10 DAYS JAIL, PAY COURT COSTS, \$50^G

The following is an example of the CSL when the first of two CDDs was not available:

2.051:^U§DUI^U§5 DAYS JAIL, PAY COURT COSTS^R19940930^U§POSSESSION OF FIREARMS^U§10 DAYS JAIL, PAY COURT COSTS, \$50^G

When submitting a custody tenprint, use this field for custody information. In the event that there is no arrest information available when submitting a custody tenprint, the COL and CDD must be copied to the corresponding AOL and DOO fields of the Arrest Segment Literal (ASL), which is mandatory in all criminal tenprint submissions.

CSR 2.048 – Civil Search Requested Indicator. This field shall contain a “Y” if a search of the Civil File is desired at the completion of the Criminal File search.

CST 2.061 – Case Title. This field identifies the Latent Case. It will include information concerning the case, and it must include the offense type.

CTZ 2.021 – Country of Citizenship. This field contains the name of the country of which the subject is a citizen. Entry must be a valid country code from Code Table POB in Part IV of the NCIC State and Country Data Code Table.

DMI 2.2013 – Disposition Maintenance Indicator. (Future Capability) An indicator set by the IAFIS user that depicts a set of values that specify the type of maintenance the III segment of IAFIS should perform on a subject criminal history record when disposition data requests are received. The following chart represents the valid DMI Codes:

| <u>External Code</u> | <u>Flag</u> | <u>Literal</u> | <u>Description</u> |
|----------------------|-------------|----------------|---|
| <u>Blank</u> | <u>NULL</u> | <u>Blank</u> | <u>Default to add disposition data (A) from incoming request to a specified DOA.</u> |
| <u>A</u> | <u>ADD</u> | <u>Add</u> | <u>Add disposition data from incoming request to a specified DOA.</u> |
| <u>D</u> | <u>APP</u> | <u>Append</u> | <u>Append disposition data from an incoming request to existing disposition data on a specified DOA.</u> |
| <u>R</u> | <u>RPL</u> | <u>Replace</u> | <u>Replace existing disposition data for a specified DOA with disposition date from incoming request.</u> |
| <u>X</u> | <u>DEL</u> | <u>Delete</u> | <u>Delete existing disposition data for specified DOA.</u> |

Deleted: ¶
 ¶
 DMI Codes ... [56]

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-6

XXXXX 99, 9999

DNAC 2.2018 – DNA in CODIS Flag (Future Capability). This is a one-byte field that will indicate whether the DNA available is located in the CODIS database for the subject identified on the CAR, CNA, and CPNU TOTs. The permissible values are ‘Y’ or ‘N’.

DNAF 2.2016 – DNA Flag (Future Capability). This is a one-byte field that will indicate whether DNA is available for the subject identified on the CAR, CNA, and CPNU TOTs. The permissible values are ‘Y’ or ‘N’.

DOA 2.045 – Date of Arrest. This field contains the date of arrest. The date shall appear as an eight-digit number in the same format as specified in Section 1.2 of this appendix. DOA shall not exceed date of submission except when the submission originates from an international contributor located in a time zone earlier than the Eastern Time Zone. This date field shall contain the local date for the region submitting the request. Edit checks on the IAFIS will accept the local date as valid up to 24 hours forward to accommodate the variance between international time zones.

DOB 2.022 – Date of Birth. This field contains the date of birth. It is entered as an eight-digit number in the same format as specified in Section 1.2 of this appendix. If DOB is completely unknown, enter as 00000000. Partial DOBs are not allowed. DOB shall not exceed date of submission after time zone adjustment.

DORI 2.2017 – DNA Location (Future Capability). This is an alpha-numeric field that will contain the ORI of the contributor which has the DNA available for the subject identified on the CAR, CNA, and CPNU TOTs. The field will be required when the DNAF = ‘Y’.

Formatted: French (France)

DOS 2.046 – Date of Arrest – Suffix. This field contains a code representing the sequence of the subject’s arrests within a given date. The code also indicates the type of fingerprint card on which the Date of Arrest was contained. This field is for internal use within the FBI only.

Formatted: Font: Not Bold, No underline

DPR 2.038 – Date Printed. This field contains the date that the subject was fingerprinted. The format shall be the same as that specified in Section 1.2 of this appendix. DPR shall not exceed date of submission except when the submission originates from an international contributor located in a time zone earlier than the Eastern Time Zone. This date field shall contain the local date for the region submitting the request. Edit checks on the IAFIS will accept the local date as valid up to 24 hours forward to accommodate the variance between international time zones.

EAD 2.039- Employer and Address. The name and address of the subject’s primary employer may be entered into this free-text field. The EAD returned in a response is the same as the one submitted.

EID 2.049 – Employee Identification Number. This field contains the employee identification number (e.g., user ID) for federal agency employees granted privileges relating to Special Population Cognizant (SPC) File searching or maintenance. Maintenance privileges include adding records, updating records, deleting record, or appending additional sets of fingerprint images to an existing SPC record.

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-7

XXXXX 99, 9999

ERS 2.075 – Electronic Rap Sheet. This field shall contain the electronic rap sheet. The electronic rap sheet is an electronic copy of the Identification Record Report (IDRR) or the Non-Identification Response (NIDR) as are done today. The electronic rap sheet shall consist of lines with a maximum of 74 characters per line (text of 72 plus two line control characters).

ETC 2.069 – Estimated Time to Complete. The estimated time to complete a search or multiple searches for a Latent Search Status and Modification Query may be entered into this field. This one-to-four-byte field will contain the estimated search completion time in minutes up to five days.

EXP 2.080 – Response Explanation. This field is free-form text to elaborate on the Response Code field.

EYE 2.031 – Color Eyes. For this field, the three-letter code from the following table is used to indicate the subject’s color of eyes.

| <u>Eye Color</u> | <u>Code</u> |
|------------------|-------------|
| Black | BLK |
| Blue | BLU |
| Brown | BRO |
| Gray | GRY |
| Green | GRN |
| Hazel | HAZ |
| Maroon | MAR |
| Multicolored | MUL |
| Pink | PNK |
| Unknown | XXX |

FBI 2.014 – FBI Number. This field contains the subject’s FBI number if known. A valid FBI number shall be no more than nine alphanumeric characters. The FBI number returned in a response is dependent upon the search results (see Section 3.6).

FFN 2.003 – FBI File Number. This is a 10-byte numeric representing the FBI Investigative File Number. This is not the FBI Number specified by the mnemonic “FBI.” Since it is used for FBI LFPS record keeping purposes, it is imperative that the user transmit this number if it is known.

FGP 2.074 – Finger Position. This field is used for latent submissions and searches and contains the fingerprint position code of the latent print(s) submitted. The following table is the finger position and code table:

| <u>Finger Position</u> | <u>Code</u> |
|------------------------|-------------|
| Unknown or “ALL” | 00 |
| Right thumb | 01 |

IAFIS-DOC-01078-8.1

C-8

XXXXX 99, 9999

Formatted Table

Deleted: 002

Deleted: APRIL 1, 2008

| <u>Finger Position</u> | <u>Code</u> |
|------------------------|-------------|
| Right index | 02 |
| Right middle | 03 |
| Right ring | 04 |
| Right little | 05 |
| Left thumb | 06 |
| Left index | 07 |
| Left middle | 08 |
| Left ring | 09 |
| Left little | 10 |

Formatted Table

If more than one finger is submitted, then the codes will be separated by the R_S character separator. For latent searches, if multiple fingerprint images are included in one search, finger position is mandatory for all images. If finger position is unknown, the search may contain only a single image, and the field FGP will be omitted or may contain multiple guesses at the correct finger position in the FGP field. In this case, the PAT field must contain "00" in its Finger Number subfield to indicate that the actual position is unknown (see also PAT entry).

FIU 2.072 – Fingerprint Image(s) Updated. This alphanumeric field contains the finger positions that were updated in the FBI's Fingerprint Image Master File as a result of an electronic request to update fingerprint images. The finger numbers for which image information is requested are selected from Table 6, "Finger Position Code," in Section 10 of ANSI NIST-ITL 1-2007. Up to 13 individual finger numbers may be listed, separated from one another by the U_S separator. If images of all 14 fingers were updated, the single character "A" is shown instead of individual finger numbers. If no images were updated, an "N" will be returned.

FNR 2.057 – Finger Number(s) Requested. This numeric field is used in transactions involving a request for fingerprint image information. The finger numbers for which image information is requested are selected from Table 12, "Finger Position Code," in Section 11 of ANSI NIST-ITL 1-2007. Up to 13 individual finger image numbers may be listed, separated from one another by the R_S separator. If all 14 tenprint images are desired, 00 is shown instead of individual finger numbers. For transactions that allow only the ten rolled fingerprint images, when all ten images are desired, list each one separately, as $01^R_02^R \dots 10^G_S$.

FPC 2.033 – NCIC Fingerprint Classification. If available, the NCIC fingerprint classification will be returned in the FBI's responses to latent submissions.

The NCIC FPC is composed of 20 characters. Two characters represent each finger as follows:

| <u>Positions</u> | <u>Finger</u> |
|------------------|---------------|
| 1 and 2 | Right thumb |
| 3 and 4 | Right index |
| 5 and 6 | Right middle |
| 7 and 8 | Right ring |

Formatted Table

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-9

XXXXX 99, 9999

| <u>Positions</u> | <u>Finger</u> |
|------------------|---------------|
| 9 and 10 | Right little |
| 11 and 12 | Left thumb |
| 13 and 14 | Left index |
| 15 and 16 | Left middle |
| 17 and 18 | Left ring |
| 19 and 20 | Left little |

The following codes apply:

| <u>Pattern Type</u> | <u>Pattern Subgroup</u> | <u>NCIC FPC Code</u> |
|------------------------------|---------------------------|--|
| Arch | Plain Arch | AA |
| | Tented Arch | TT |
| Loop | Radial Loop | Two numeric characters. Determine actual ridge count and add fifty (50). For example, if the ridge count of a radial loop is 16, add 50 to 16 for a sum of 66. Enter this sum (66) in the appropriate finger position of the FPC field. |
| | Ulnar Loop | Two numeric characters indicating actual ridge count (less than 50). For example, a ridge count of 14, enter as 14; a ridge count of 9, enter as 09. |
| Whorl* | Plain Whorl | Inner Meeting PO |
| | | Inner Meeting PI |
| | | Outer Meeting PM |
| | Central Pocket Loop Whorl | Inner Meeting CO |
| | | Inner Meeting CI |
| | | Outer Meeting CM |
| | Double Loop Whorl | Inner Meeting DO |
| | | Inner Meeting DI |
| | | Outer Meeting DM |
| | Accidental Whorl | Inner Meeting XO |
| | | Inner Meeting XI |
| | | Outer Meeting XM |
| Missing/Amputated Finger** | XX | |
| Scarred/Mutilated Pattern*** | SR | |

Deleted: 002

Deleted: APRIL 1, 2008

| <u>Pattern Type</u> | <u>Pattern Subgroup</u> | <u>NCIC FPC Code</u> |
|---------------------|-----------------------------------|----------------------|
| | Approximate Fingerprint Class**** | AC |
| | Unclassifiable**** | UC |

The NCIC FPC for a set of fingerprints made up of all ulnar loops might read:

2.033:12101116141109111713^G_S

A combination of loops and whorls with an amputated right index finger might read:

2.033:12XX11CO14115906CI13^G_S

* Prior to adoption of the above method for coding whorl patterns, this pattern was divided into inner, meeting, and outer subgroups only with codes II, MM, and OO, respectively. Some older records in the file may show the codes II, MM, and OO.

** Code XX is used in instances of missing and totally/partly amputated fingers where conditions make it impossible to accurately classify an impression according to the above instructions for NCIC FPC. It is recognized that under the Henry System, if a finger is missing or amputated, it is given a classification identical to the opposite finger; however, this must not be done in the NCIC FPC because the location of finger or fingers missing/amputated is not indicated.

*** Code SR is used in instances in which the fingerprint cannot be accurately classified because of complete scarring or mutilation and a classifiable print cannot be obtained. As in the case of missing and amputated fingers, the procedure for assigning the classification of the opposite finger, as is done under the Henry System, should not be used for the NCIC FPC.

**** Codes UC and AC still exist for some legacy records in the Criminal History file.

Refer to the NCIC Code Manual, 4-28, for the FPC Field for Unidentified Persons.

GEO 2.044 – Geographic Area of Search. This field indicates the geographic area to be searched. Entry may be any valid code from Code Table POB in Part VI of the NCIC State and Country Data Code Table. Each GEO shall be separated from the next by the ^R_S separator character. If inclusion of all 50 states is desired, this field shall remain blank.

HAI 2.032 – Hair Color. In this field, the three-letter code from the following table is used to indicate the subject's color of hair.

| <u>Hair Color</u> | <u>Code</u> |
|---------------------|-------------|
| Bald | BAL |
| Black | BLK |
| Blond or Strawberry | BLN |

← Formatted Table

Deleted: 002

Deleted: APRIL 1, 2008

| IAFIS-DOC-01078-8.1

C-11

XXXXX 99, 9999

| <u>Hair Color</u> | <u>Code</u> |
|------------------------|-------------|
| Blue | BLU |
| Brown | BRO |
| Gray or Partially Gray | GRY |
| Green | GRN |
| Orange | ONG |
| Pink | PNK |
| Purple | PLE |
| Red or Auburn | RED |
| Sandy | SDY |
| Unknown | XXX |
| White | WHI |

Formatted Table

HGT 2.027 – Height. This field contains the subject’s height as a three-character value. If reported in feet and inches, the first (leftmost) digit is used to show feet while the two rightmost digits are used to show the inches between 00 and 11. If reported in inches, then the leftmost character is “N” followed by two digits. If height is unknown, 000 is entered. The allowable range is 400 to 711. Heights outside this range will be clamped at these limits.

HTR 2.028 – Height Range. If a range of height is given, it shall be expressed as two three-character values formatted as described for mnemonic HGT, indicating the shortest and tallest heights of the subject. There shall be no separator character used between the heights. The allowable range is 400 to 711. Heights outside this range will be clamped at these limits.

Deleted: ¶

ICO 2.056 – Identification Comments. Additional miscellaneous identification remarks providing the reason for caution may be entered in this free-text field. The first character may not be a blank.

IDC 2.002 – Image Designation Character. This mandatory field shall be used to identify the user-defined text information contained in this record. The IDC contained in this field shall be the IDC of the Type-2 logical record as found in the file content field of the Type-1 record.

IFS 2.066 – Identification Firearms Sales (Future Capability). This field will be a required element for the DSPE TOT indicating a prohibitor that may prevent the subject from the purchase of a firearm. The following is a list of allowable indicators:

| <u>Code</u> | <u>Description</u> |
|-------------|--|
| <u>D</u> | <u>Disqualification for Firearms Sales</u> |
| <u>X</u> | <u>Court Disposition Pending/Conviction Status Unknown</u> |
| <u>C</u> | <u>No Disqualification for Firearms Sales</u> |

Formatted: Keep with next

Formatted Table

Formatted: Keep with next

Formatted: Keep with next, Keep lines together

Formatted: Keep with next

Formatted: Font: Not Bold, No underline

Deleted: 002

Deleted: APRIL 1, 2008

IIR 2.2012 – Iris Images Requested. This optional field shall be used to request iris images in an Image Request (IRQ) transaction. The values of this one-byte numeric field will be either 0 (both eyes), 1 (left eye), or 2 right eye). If not present in the transaction, no iris images will be returned.

IAFIS-DOC-01078-8.1

C-12

XXXXX 99, 9999

IMA 2.067 – Image Capture Equipment. This free-text field is used to log the make, model, and serial number of the equipment used to acquire images. It is a grouped field composed of three subfields: the Make (MAK), Model (MODL), and Serial Number (SERNO) of the acquisition device separated by the \backslash separator character.

IMT 2.062 – Image Type. This field identifies the type of image (e.g., palmprints, toe prints) included in an electronic submittal. The following is a list of IMT values to be used in an electronic latent submittal to identify the Type-7 or Type-13 record(s) present:

| | |
|-------------|---|
| Fingerprint | 1 |
| Lower Joint | 2 |
| Palmprint | 3 |
| Toe Print | 4 |
| Foot Print | 5 |

LCN 2.012 – FBI Latent Case Number. This field is an 11-byte alphanumeric/special assigned by the FBI LFPS and used for recordkeeping purposes. Although the field is optional, it is imperative that the user transmits this number if it is known.

LCX 2.013 – Latent Case Number Extension. Defines extensions assigned by the FBI for each submission related to a Latent Case Number. The LCX shall be a four-digit extension starting with “0001” for the first submission and incrementing by one for each subsequent submission. The LCX shall be used only in conjunction with LCN.

LEN 2.001 – Logical Record Length. This field contains the length of the logical record specifying the total number of bytes, including every character of every field contained in the record. The number of characters added to the record by the LEN field itself shall be included in calculating the value of LEN.

MIL 2.042 – Military Code. A one-letter code from the following table shall be entered in this field to indicate which branch of the United States Military submitted the enlistment transaction.

| <u>Military Branch</u> | <u>Code</u> |
|------------------------|-------------|
| Army | A |
| Air Force | F |
| Navy | N |
| Marines | M |
| Coast Guard | G |

MNU 2.017 – Miscellaneous Identification Number. If there are any miscellaneous identification numbers, they shall be entered in this field. The format of the data shall be a two-letter identifying code, followed by a hyphen (-), followed by the number itself. The following table lists the acceptable two-letter identifying codes. If “AF” or “AS” is entered, all characters following the hyphen must be numeric. Interspersed blanks are invalid. Types of numbers not listed in the following table (such as driver’s license) shall not be entered. Only

Deleted: 002

Deleted: APRIL 1, 2008

U.S. passport numbers shall be entered; foreign numbers shall be ignored. The size of the MNU is limited to 15 characters and as many as four miscellaneous numbers may be included in this field. Each MNU shall be separated from the next by the § separator character.

| <u>Identifying Agency</u> | <u>Code</u> |
|--|-------------|
| Air Force Serial Number | AF |
| Non-Immigrant Admission Number | AN |
| Alien Registration Number | AR |
| Air National Guard Serial Number, Army Serial Number, National Guard Serial Number | AS |
| Bureau Fugitive Index Number | BF |
| Canadian Social Insurance Number | CI |
| U. S. Coast Guard Serial Number | CG |
| Identification Order Number | IO |
| Marine Corps Serial Number | MC |
| Mariner's Document or Identification Number | MD |
| RCMP Identification or Fingerprint Section Number | MP |
| National Agency Case Number | NA |
| Navy Serial Number | NS |
| Originating Agency Police or Identification Number | OA |
| Personal Identification Number (State Issued Only) | PI |
| Passport Number (U.S. Only) | PP |
| Port Security Card Number | PS |
| Selective Service Number | SS |
| Veterans Administration Claim Number | VA |

MSC 2.089 – Match Score. This field defines the match score of a fingerprint from AFIS for a candidate list response.

MSG 2.060 – Status/Error Message. This free-text field will contain reason, status, or error messages that are generated as a result of the processing of a transaction and will be sent back to the submitter. For example, an Unsolicited Unsolved Latent Delete transaction will contain the reason for the deletion of a record. Each message will be separated by the § separator character.

NAM 2.018 – Name. This alpha-special field contains the name(s) of the subject. The format shall be the surname followed by a comma (,) followed by the given name(s), which are separated by a space. Part IV of the NCIC Code Manual describes in greater detail the manner in which each name is to be entered. Hyphens, commas, and blanks are allowed as special characters. Numerals are not allowed. Special values of NAM to be entered in cases where the subject's name is not known are:

Deleted: 002

Deleted: APRIL 1, 2008

| <u>Condition</u> | <u>Name Field Value</u> |
|----------------------------|--------------------------|
| Amnesia Victim | “UNKNOWN AMNESIA XX” |
| Unknown Deceased | “UNKNOWN DECEASED XX” |
| Name Not Available (Other) | “DOE JOHN” or “DOE JANE” |

- Formatted: Keep with next, Keep lines together
- Formatted Table
- Formatted: Keep with next, Keep lines together
- Deleted:
- Deleted:
- Formatted: Keep with next, Keep lines together
- Formatted: Keep with next, Keep lines together
- Deleted:
- Deleted:

NAM1 2.2001 – Name-One. (Future Capability) This alpha-special character field is the first of five name fields specifically to facilitate the communication of long names in excess of the number of characters provided for by other name field definitions. These long name fields provide the ability to identify subjects cross-culturally by simply passing as many names as are required to identify a subject in the order that subject’s name appears. NAM1 could represent a given name (*e.g.*, Brian) or an only name used in a single name culture (*e.g.*, Mohammed). The maximum length of the NAM1 field is 50 characters.

NAM2 2.2002 – Name-Two. (Future Capability) This alpha-special character field is the second of five name fields (see NAM1) specifically to facilitate the communication of long names in excess of the number of characters provided for by other name field definitions. This field could be the middle name for a culture using three names (*e.g.*, David) or the second of a string of four or five names. The maximum length of the NAM2 field is 50 characters.

NAM3 2.2003 – Name-Three. (Future Capability) This alpha-special character field is the third of five name fields (see NAM1) specifically to facilitate the communication of long names in excess of the number of characters provided for by other name field definitions. This field could be the last name (or surname) for a culture using three names (*e.g.*, Smith) or the third of a string of four or five names, possibly to indicate tribal, village, or parentage information. The maximum length of the NAM3 field is 50 characters.

NAM4 2.2004 – Name-Four. (Future Capability) This alpha-special character field is the fourth of five name fields (see NAM1) specifically to facilitate the communication of long names in excess of the number of characters provided for by other name field definitions. This field could be the fourth name for a culture using four or five names (*e.g.*, a tribal or village name, such as “al Tikriti,” or from Tikrit, or to indicate parentage, such as “ben Reuben,” or son of Reuben) or the fourth of a string of four or five names. The maximum length of the NAM4 field is 50 characters.

NAM5 2.2005 – Name-Five. (Future Capability) This alpha-special character field is the fifth of five name fields (see NAM1) specifically to facilitate the communication of long names in excess of the number of characters provided for by other name field definitions. This field could be the fifth name for a culture using five names (*e.g.*, a tribal or village name, such as “al Tikriti,” as in from Tikrit, or to indicate parentage, such as “ben Reuben,” as in son of Reuben) or the fifth of a string of five names. The maximum length of the NAM5 field is 50 characters.

NCR 2.079 – Number of Candidates’ Images Returned. This field contains the maximum number of candidates (images) the submitter desires to receive in response to a latent image or features search. If the field is left blank, only images for the highest-scoring candidate will be returned. The maximum value of NCR is currently 20.

- Deleted: 002
- Deleted: APRIL 1, 2008

NDR 2.098 – Name of Designated Repository. (Future Capability) This field contains the numerical designation of the repository(ies) to be searched. Repository numbers are assigned by the FBI CJIS Division. Multiple entries in this field will indicate a desire to search more than one repository, including Canada’s RTID and authorized DHS records. Multiple entries will be separated by the ~~RS~~ separator. The following values are acceptable for NDR.

Deleted: <

Deleted: RS>

| Table of NDR Values | |
|---------------------|---|
| NDR Value | File Name |
| 1 | Criminal Master File Records |
| 2 | Civil Records |
| 3 | Unsolved Latent File |
| 4 | Major Case File Records |
| 5 | Latent Image File Records |
| 6 | Repository for Individuals of Special Concern (RISC) |
| 7 | Canada Real Time Identification (RTID) |
| 8 | DoD Automated Biometric Identification System (ABIS) |
| 9 | DHS IDENT/US-VISIT |
| 10-100 | Reserved for Future Use |
| 101-125 | FBI Special Population Cognizant Files |
| 126-135 | Other Federal Organization Special Population Cognizant Files |

NIR 2.2010 – Number of Images Requested. (Future Capability) This optional field is used in conjunction with a Subject Photo Request (TOT = CPR) to indicate if more than one photo is being requested (e.g., for tattoos) (see Appendix K). The default value if not provided will be “1.”

NOT 2.088 – Note Field. This free-text field is used to provide additional information regarding electronic latent submissions. For latent search IDENT results feedback (LSIR), the NOT field will be used to indicate the candidate from the SRL that matched the search image. For ULM transactions, the NOT field will provide information related to latent search images that are candidates for comparison with the unsolved latent (e.g., case-related identifiers or point of contact information).

OCA 2.009 – Originating Agency Case Number. This field contains the one-to-twenty-character Originating Agency Case Identifier (OCA) assigned by the originating agency. This alphanumeric-special (ANS) field may contain any printable 7-bit ASCII character with the exception of the period (.). The OCA must not begin with a blank.

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-16

~~XXXXX 99, 9999~~

OCP 2.040 – Occupation. This free-text field contains the subject’s occupation. The OCP returned in a response is the same as the one submitted.

OFC 2.053 – Offense Category. This field shall contain a “1” for a crime categorized as personal, a “2” for a crime categorized as property, and a “3” for a crime categorized as both.

PAT 2.034 – Pattern Level Classifications. This grouped field contains information about the finger(s) pattern types. It is composed of two subfields, Finger Position (FGP), and Pattern Classification Code (PATCL), displayed as the two-character finger position code followed by the § separator and the primary pattern type code as chosen from the following table. Up to two reference pattern classifications per finger are also allowed, thereby making the total number of pattern classes allowable per finger equal to three. If multiple pattern types are used for reference for the same finger, they shall be separated from each other by the § separator. Multiple fingers shall be separated by the § separator. If submitting a Latent Fingerprint whose actual finger position is unknown, the PAT and FGP (2.074) fields are used in conjunction as follows to supply guesses for which finger position the latent print might be: place a “00” in the FGP subfield of PAT to indicate the actual position is unknown; place the actual pattern in the PATCL subfield; place one or more finger number guesses in the FGP field (2.074).

Two characters represent each finger as follows:

| <u>Finger Position</u> | <u>Code</u> |
|------------------------|-------------|
| Right thumb | 01 |
| Right index | 02 |
| Right middle | 03 |
| Right ring | 04 |
| Right little | 05 |
| Left thumb | 06 |
| Left index | 07 |
| Left middle | 08 |
| Left ring | 09 |
| Left little | 10 |

The following is a list of acceptable IAFIS pattern level fingerprint classifications.

| <u>Pattern</u> | <u>Code</u> |
|---------------------------------|-------------|
| Arch, Type Not Designated | AU |
| Whorl, Type Not Designated | WU |
| Right Slant Loop | RS |
| Left Slant Loop | LS |
| Complete Scar | SR |
| Amputation | XX |
| Unable to print (e.g. bandaged) | UP |
| Unable to Classify | UC |

Deleted: 002

Deleted: APRIL 1, 2008

The following is an example of the Pattern Level Classification field with only one pattern per finger.

2.034:01^U§WU^R§02^U§LS^R§03^U§LS^R§04^U§LS^R§05^U§LS^R§06^U§RS^R§07^U§RS^R§08^U§LS^R§09^U§RS^R§10^U§RS^G

The following is an example of the Pattern Level Classification field with extra pattern references for some of the fingers.

2.034:01^U§RS^U§WU^U§AU^R§02^U§RS^U§AU^U§WU^R§03^U§WU^R§04^U§RS^R§05^U§WU^R§06^U§LS^R§07^U§WU^R§08^U§AU^R§09^U§AU^R§10^U§WU^U§AU^G

PEN 2.078 – Penetration Query Response. This field provides a response to the penetration query that includes a set of search parameters for a new search. The response will be an estimated size, in percentage, of the repository that will be searched given the input parameters.

PHT 2.036 – “Photo Available” Indicator. If a photograph of the subject is available, this field shall contain a “Y”; otherwise, the field shall be omitted.

POB 2.020 – Place of Birth. The subject’s place of birth shall be entered in this field. Indicate in this POB field the state (Mexico or United States), territorial possession, province (Canada), or country of birth. The appropriate two-letter abbreviation shall be used as listed in Part IV of the NCIC State and Country Data Code Table. The criteria listed below shall also be considered when assigning POB.

| <u>If the following condition exists:</u> | <u>Enter Code</u> |
|---|-------------------|
| POB stated as state AND country and applicable code not contained in Code Table; OR city can be ascertained as not being located in the United States; OR foreign POB and applicable code not contained in Code Table | YY |
| POB stated as only city AND city can be ascertained as being located in the United States | US |
| POB is Mexico or any Mexican state or province not in Code Table | MM |
| POB is “Mexico, Mexico” | MX |
| POB is unknown | XX |

Formatted: English (U.S.)

PPA 2.035 – “Palmprints Available” Indicator. If palmprints are available, this field shall contain a “Y”; otherwise, the field shall be omitted.

PRI 2.076 – Priority. This field shall indicate the priority of a latent search (from 1 to 3, with 1 being the highest priority). The priority levels will generally correspond to the following crime types in descending order of priority.

1. Homicide, rape, and special circumstances
2. Kidnap, assault, and robbery

Deleted: 002

Deleted: APRIL 1, 2008

3. Arson, drugs, personal crimes, and property crimes

Federal agencies will determine their own priority schemes. No additional validation of priorities will be provided. IAFIS will not interrupt searches in progress upon receipt of higher priority searches.

PTD 2.063 – Person Type Designator. This field is used in the submittal of comparison fingerprints, and it indicates that the fingerprints belong to a victim, suspect, individual with legitimate access to the object, or other individuals involved in the latent case. The following codes will be used.

| <u>Code</u> | <u>Designation</u> |
|-------------|--------------------|
| S | Suspect |
| V | Victim |
| E | Elimination |
| O | Other |

PTY 2.2009 – Photo Type. (Future Capability) This optional field is used in conjunction with a subject photo request (TOT = CPR) (see Appendix K) to define the type of photo being requested (*i.e.*, face, scar, mark, tattoo). The values of PTY correspond to the Type-10 field IMT (10.003). If not provided, the default value will be “FACE,” and the most recent mugshot will be returned.

QDD 2.004 – Query Depth of Detail. This field is used to define the scope of the Latent Queue Management Query. The defined levels can be at the state level (S), at the ORI level (O), or at the Case level (C).

RAC 2.025 – Race. This field is used to indicate the race of the subject. Use the predominant race code from the following table:

| <u>If Subject Is</u> | <u>Enter Code</u> |
|--|-------------------|
| Chinese, Japanese, Filipino, Korean, Polynesian, Indian, Indonesian, Asian Indian, Samoan, or any other Pacific Islander | A |
| A person having origins in any of the black racial groups of Africa | B |
| American Indian, Eskimo, or Alaskan native, or a person having origins in any of the 48 contiguous states of the United States or Alaska who maintains cultural identification through tribal affiliation or community recognition | I |
| Of indeterminable race | U |
| Caucasian, Mexican, Puerto Rican, Cuban, Central or South American, or other Spanish culture or origin, Regardless of race | W |

Formatted Table

Deleted: Middle Eastern ... [57]

Formatted: English (U.S.)

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-19

XXXXX 99, 9999

RAP 2.070 – Request for Electronic Rap Sheet. The purpose of this field is to allow the contributors to optionally request an electronic rap sheet of the suspect. That rap sheet will be an IDRR if an Ident was made and an NIDR if the submission resulted in a Non-Ident. A “Y” indicates that a rap sheet is desired, and an omitted field or an “N” indicates that no electronic rap sheet should be returned with the response.

2.2014 – Rap Back Eligibility. (Future Capability) This mandatory one-character alpha field is used to convey whether the Rap Back owner of record is still eligible to receive Rap Back information (e.g., is the Rap Back subject still employed by the subscriber?). The value “Y” is used to indicate continued eligibility.

Deleted: **RBE**

2.052 – Rap Back Request. (Future Capability) This optional field is assigned to the Rap Back Service. As a Future Capability, this field tag remains, but the acronym could change as NGI further develops.

Deleted: **RBR**

Deleted: n criminal and civil background submissions is used to request that the FBI retain and monitor the submitted subject information for criminal activity. Presence of this field indicates the desire of the submitting agency for FBI retention, monitoring, and reporting of this subject’s record.

2.058 – Rap Back Recipient. (Future Capability) This optional field is assigned to the Rap Back Service. As a Future Capability, this field tag remains, but the acronym could change as NGI further develops.

Deleted: The RBR field values will be as follows: “1” requests monitoring for criminal activity; “2” requests monitoring for civil activity; “3” requests monitoring for both criminal and civil activity. If a submission satisfying the requested monitoring criteria matches the subject’s record, the agency that requested the Rap Back service will receive a Rap Back Hit Notification.

2.2011 – Rap Back Verification Status. (Future Capability) This optional field is assigned to the Rap Back Service. As a Future Capability, this field tag remains, but the acronym could change as NGI further develops.

Deleted: **RBRC**

Deleted: **Q**

Deleted:

Deleted: **2**

Deleted: **1**

Deleted: **cord Owner**

Deleted: field is used to indicate the owner of a Rap Back subject record is to receive the Rap Back Hit Notification in the event of a criminal or civil hit. The default value for this field will be the ORI number provided in the CRI field of the original tenprint submission. A total of three (3) ORIs may be provided in this field.

Deleted: **RBVS**

Deleted: mandatory field is used in the response to a Rap Back Verification Request to indicate whether continued monitoring is desired for the subject record. This field is to be populated with either a “Y” for continued monitoring or “N” to discontinue monitoring. If left blank, a default of “N” will be used.

Deleted: **002**

Deleted: **APRIL 1, 2008**

RCD1 2.091 – Ridge Core Delta One for Subpattern Classification. This grouped field contains information about the finger(s) ridge counts and is used for Native Mode searches in conjunction with the Pattern Level Classification (PAT - 2.034). It is comprised of two subfields, Finger Position (FGP), and Ridge Count Number 1 (RCN1). The two-character finger position code as specified for the related Pattern Level Classification (PAT) is followed by the $\frac{U}{S}$ separator and at least one RCN1. Each pattern classification PATCL specified in the tagged field 2.034 must be accompanied by two ridge count indicators, one in RCD1 (2.091) and one in RCD2 (2.092) as described in the table provided with RCD2. If multiple RCN1s are used for reference to the same finger, then they shall be separated from each other by the $\frac{U}{S}$ separator. Multiple fingers, if provided, shall be separated by the $\frac{R}{S}$ separator.

RCD2 2.092 - Ridge Core Delta Two for Subpattern Classification. This grouped field contains information about the finger(s) ridge counts and is used for Native Mode searches in conjunction with the Pattern Level Classification (PAT 2.034). It is composed of two subfields, Finger Position (FGP), and Ridge Count Number 2 (RCN2). The two-character finger position code as specified for the related Pattern Level Classification (PAT) is followed by the $\frac{U}{S}$ separator and at least one RCN2. Each pattern classification PATCL specified in the tagged field 2.034 must be accompanied by two ridge count indicators, one in RCD1 and one in RCD2 as described in the following table. If multiple RCN2s are used for reference to the same finger, they shall be separated from each other by the $\frac{U}{S}$ separator. Multiple fingers, if provided, shall be separated by the $\frac{R}{S}$ separator.

The Ridge Count Number (RCN1 and RCN2) represents the number of ridges between the core and the delta. For right and left slant loops, this count identifies the ridges crossed on a line between the core and the delta. For whorls, both the RCN1 and the RCN2 values have meaning. Permissible values are 1 to 30 for actual ridge counts and 30 if there are more than 30 ridges. The count of 31 indicates an unknown number of ridges, and 0 indicates that the ridge count is not applicable.

The following is a list of acceptable IAFIS pattern level fingerprint classifications and the allowable ridge count ranges for each.

| <u>Pattern</u> | <u>Code</u> | <u>RCN1</u> | <u>RCN2</u> |
|----------------------------------|-------------|-------------|-------------|
| Arch, Type Not Designated | AU | 0 | 0 |
| Whorl, Type Not Designated | WU | 1-31 | 1-31 |
| Right Slant Loop | RS | 1-31 | 0 |
| Left Slant Loop | LS | 1-31 | 0 |
| Complete Scar | SR | 0 | 0 |
| Amputation | XX | 0 | 0 |
| Unable to print (e.g., bandaged) | UP | 0 | 0 |
| Unable to Classify | UC | 0 | 0 |

The following example shows the relationship between the Pattern Level Classification (2.034), Ridge Core Delta 1 (2.091) and Ridge Core Delta 2 (2.092) fields where only the primary classification for each finger is given. In this case, one PATCL, one RCN1, and one RCN2 are associated with each finger. Spaces are shown for clarity only.

```

2.034:01 U WU      R 02 U LS      R 03 U AU      R 04 U XX ... R 10 U WU  G
           S       S S       S S       S S       S S       S S       S S
2.091:01 U 9      R 02 U 4      R 03 U 0      R 04 U 0      ... R 10 U 14  G
           S       S S       S S       S S       S S       S S       S S
2.092:01 U 7      R 02 U 0      R 03 U 0      R 04 U 0      ... R 10 U 21  G
           S       S S       S S       S S       S S       S S       S S

```

The following example of the Pattern Classification (2.034) field includes two reference classifications for finger 01, only a primary classification for finger 07, and one reference classification for finger 09. Each PATCL in 2.034 requires a corresponding RCN1 and RCN2 in fields 2.091 and 2.092. Spaces are shown for clarity only.

```

2.034:01 U RS U WU U AU R 07 U XX R 09 U AU U LS G
           S S S S S S S S S S S S S S S S S S
2.091:01 U 9 U 9 U 0 R 07 U 0 R 09 U 0 U 8 G
           S S S S S S S S S S S S S S S S S
2.092:01 U 0 U 11 U 0 R 07 U 0 R 09 U 0 U 0 G
           S S S S S S S S S S S S S S S S

```

REC 2.082 – Response Code. A one-byte alpha field with allowable values of “Y” or “N.” This field is used in the PDR and PRR transactions to indicate the status of the corresponding request. If the request contains any errors, the response code (REC) will be set to “N.” Otherwise it will be set to “Y.”

Deleted: 002
 Deleted: APRIL 1, 2008

RES 2.041 – Residence of Person Fingerprinted. The subject’s residential address may be entered in this field as free text, including printable special characters and formatting characters (CR, LF, TAB). The RES returned in a response is the same as the one submitted.

RET 2.005 – Retention Code. This is an alpha field indicating whether the arrest information submitted as a part of a transaction (either electronic or hard copy) is to be retained as a permanent part of the FBI’s Criminal Master File. Submit a “Y” for yes or an “N” for no. For Civil submissions, RET is used to indicate whether the civil submission is to be retained in the civil files. In the case where a Criminal Ident was made against the Criminal File in a Civil Submission (irrespective of the value of RET), under some conditions the record is retained as a Civil Cycle in that Criminal record.

2.2015 – Rap Back Expiration Date (Future Capability). This optional field is assigned to the Rap Back Service. As a Future Capability, this field tag remains, but the acronym could change as NGI further develops.

Deleted: **REXP**

Deleted: Field Tag Field Tag

Formatted: Font: Not Bold, No underline

RFP 2.037 – Reason Fingerprinted. This alphanumeric-special field is used to indicate the purpose of a civil or applicant fingerprint card submission. Commas, blanks, dashes, hyphens, and slashes are all allowed as special characters. The submitting agency should indicate the specific statutory authority authorizing the fingerprint submission in this field. For MAP submissions, agencies must indicate “Criminal Justice Employment” or “Law Enforcement” in this field or the submission will be rejected.

Option: Agencies may choose to use standard terms in this field related to the purpose of the fingerprint submission instead of the specific statutory authority. The standard reasons are:

Formatted: Keep with next, Keep lines together

- Firearms
- Volunteer
- Criminal Justice Employment
- Child Care/School Employee
- Other Employment and Licensing

Note: The use of RFP requires coordination with FBI prior to use.

Deleted: . Agencies must contact the FBI to use this option.¶

RFR 2.095 – Request Features Record. This one-character alpha field is used to indicate a user’s desire to have IAFIS return a Type-9 features record associated with an image requested via an IRQ transaction. The features record can then be overlaid on the image for comparison purposes. A features record will be returned if the RFR value equals “Y.” A features record will not be returned if the field is omitted (its use is optional) or if the value of RFR equals “N.”

RPR 2.096 – Request Photo Record. (Future Capability) This one-character alpha field is used to indicate a user’s desire to have IAFIS return a Type-10 photo record if one is on file and disseminable. This field is used in conjunction with a Rapid Image Search transaction (RPIS).

RSR 2.065 – Repository Statistics Response. This field contains a file generated by the AFIS that provides the detailed statistics that can be used to estimate the level of penetration of the

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-22

XXXXX 99, 9999

repository given a set of search parameters defined in the search request. This field is in the form of a large ASCII file that can contain up to 32,000 bytes of alphanumeric-special (ANS) data. The file has three fields containing: (1) a parameter name, (2) a parameter value; and (3) the fraction of the file having that value of the parameter. The fields are TAB delimited. NEWLINE characters separate records. A period character is used as a decimal point in the Fraction field. As an example, the record EYE<TAB>BLUE<TAB>0.321<NEWLINE> indicates that the parameter EYE having the value BLU occurs in 32.1% of the subjects on file.

SAN 2.099 – State Arrest Number. (Future Capability) Unique arrest number assigned by the state to a criminal subject. The SAN is an optional element that may assist in matching the submitted disposition data to the correct court cycle. If present in the submission, this field should be returned in the response. Any printable 7-bit ASCII character with the exception of a period (.) is acceptable. Embedded blanks are not permitted. SAN must not begin with a blank.

SCNA 2.086 – AFIS Segment Control Number. This field contains a number used by AFIS/FBI to allow tracking of or reference to specific transactions. It is used, for example, to indicate the index number for individual records in the IAFIS Unsolved Latent File in the response to a Latent Search. It is also used to refer to transactions that contained searches for the purpose of status queries, modifications, or cancellations.

SCO 2.007 – Send Copy To. The purpose of this 9-to-19-character alphanumeric-special (ANS) field is to indicate that additional electronic responses need to be forwarded to agencies other than the contributor by the State Identification Bureau. The first nine characters shall be alphanumeric and shall contain the NCIC-assigned Originating Agency Identifier (ORI) for an agency who is to receive a copy of the response. At the option of the transmitting agency, the ORI may be expanded to a size of 19 characters, with 10 characters of alphanumeric-special (ANS) data appended to the end to assist in proper routing of the responses. However, no U or R separator may be used between the ORI and routing extension (use any printable ASCII special character (e.g., a slash) as a separator). Upon receiving an electronic response, the State Identification Bureau will forward a copy of the electronic response to each agency listed in the “SEND COPY TO” block.

- Deleted: <
- Deleted: US>
- Deleted: <
- Deleted: RS>

SDOB 2.2007 – Submitted Date of Birth. (Future Capability) A date of birth as provided in a submission that is determined to be different than the date of birth in the record of the identified subject.

SEAL 2.050 – Seal Arrest Flag (Future Capability). This is a one-byte field that will indicate whether the arrest is to be sealed upon establishment of the record identified on the CAR and CNA TOTs. The permissible values are ‘Y’ or ‘N’.

Formatted: Font: Not Bold, No underline

SEX 2.024 – Sex. This field is used to report the gender of the subject. The entry is a single character selected from the following table.

- Deleted: 002
- Deleted: APRIL 1, 2008

| <u>If Following Condition Exists</u> | <u>Enter Code</u> |
|--|-------------------|
| Subject's gender reported as female | F |
| Occupation or charge indicated "Male Impersonator" | G |
| Subject's gender reported as male | M |
| Occupation or charge indicated "Female Impersonator" or transvestite | N |
| Male name, no gender given | Y |
| Female name, no gender given | Z |
| Unknown gender | X |

SID 2.015 – State Identification Number. This field contains any known state identification number. The format is the standard two-character abbreviation of the state name followed by the number. Embedded blanks are not permitted. SIDs from New York, Oregon, or Pennsylvania may contain a hyphen in the last position. The SID returned in a response is dependent upon the search results (see Section 3.6).

SMT 2.026 – Scars, Marks and Tattoos. For each scar, mark, or tattoo present on the subject, the appropriate NCIC code shall be used in this information item. Blanks are allowed as special characters.

SNAM 2.2008 – Submitted Name. (Future Capability) A name as provided in a submission that is determined to be different than the name of record of an identified subject.

SOC 2.016 – Social Security Account Number. This field contains the subject's Social Security number if known. This number shall be entered as nine consecutive digits with no embedded punctuation characters. No foreign social security numbers shall be used.

SPCN 2.093 – Special Population Cognizant File Number. (Future Capability) This field contains the identification number for a file in a Special Population Cognizant Repository.

Deleted: record

Deleted: File

SRF 2.059 – Search Results Findings. This field is used in responses to submissions and contains a single character. An "I" shall be used to indicate that an identification has been made, and an "N" shall be used to indicate that no identification has been made. For latent comparison results feedback, in addition to "I" or "N," a pending comparison result will be indicated with a "P." For RPISR TOT, the SRF field will contain the following: "R" for red, "Y" for yellow, or "G" for green.

Deleted: 002

Deleted: APRIL 1, 2008

SSD 2.054 – Custody or Supervisory Status Start Date. This field contains the start date for the subject’s indicated custody or supervisory status. The date shall appear as an eight-digit number in the same format as specified in Section 1.2 of this appendix. The SSD may not be less than DOA. The SSD shall not exceed the current date except when the submission originates from an international contributor located in a time zone earlier than the Eastern Time Zone. This date field shall contain the local date for the region submitting the request. Edit checks on the IAFIS will accept the local date as valid up to 24 hours forward to accommodate the variance between international time zones. If custody data are submitted, all custody fields (SSD, OCA, and SLE) must be present.

TAA 2.087 – Treat as Adult. A one-byte optional field to indicate whether a juvenile is to be processed as an adult. A “Y” indicates yes; an omitted field indicates no. The TAA returned in a response is the same as the one submitted.

TSR 2.043 – Type of Search Requested. A one-byte code shall be entered in this field from the following table to indicate the type of record being submitted. The field is applicable to the FAUF, NFUF, CPDR, FNDR, NNDR, and CPNU transactions as follows.

| <u>Type of Record</u> | <u>Code</u> | <u>Applicable TOT</u> |
|--|-------------|-----------------------|
| Confidential Screening | C | CPDR, FNDR, NNDR |
| Suppress/Modify Unsolicited Want/SOR Notification (Non-Urgent Criminal) | H | CPNU |
| Pre-commission candidate record with fingerprints | P | FAUF, NFUF |
| Civil submission in support of the National Child Protection Act of 1993 | V | NFUF* |

Deleted: /

* When submitting fingerprints using a TSR of V, the contributing agency should specify either the VCA/NCPA or a state statute in the RFP field. To be charged at the volunteer rate, the word “volunteer” must appear with or without the statute.

UCN 2.081 – Universal Control Number (Future Capability). This conditional alphanumeric text field is used to identify the record with which the photo(s) or images being requested is (are) associated, to identify candidates in a candidate list, or otherwise identify individual subject records. If the record requested is other than a criminal record (*i.e.*, civil record), this field is mandatory. Can be used with CPR and IRQ transactions to identify either criminal or civil records.

ULF 2.083 – Unsolved Latent File. This one-character alpha field is used to designate whether a latent image or features record in a search should be added to the Unsolved Latent File. Submit a “Y” for yes. If negative, omit the field.

WGT 2.029 – Weight. In this field, the subject’s weight in pounds is entered. If weight is unknown, 000 is entered. All weights in excess of 499 pounds will be set to 499 lbs. WGT must be in the range 050 to 499 lbs. (however, there is no minimum range limit for missing persons or unknown persons).

Deleted: 002

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

C-25

XXXXX 99, 9999

WTR 2.030 – Weight Range. If a range of weight is given, it shall be expressed as two three-digit numbers indicating the minimum and maximum weights (in pounds) of the subject. There shall be no separator character used between the weights. WTR must be in the range 050 to 499 lbs. (however, there is no minimum range limit for missing persons or unknown persons).

| IAFIS-DOC-01078-8₁

C-26

~~XXXXX 99, 9999~~

Deleted: 002

Deleted: APRIL 1, 2008

Table C-1. Field Edit Specifications for Type-2 Elements

| Identifier | Field Number | Field Name | Character | Field Size ⁴ | | Occurrence Count | | Max Size ⁵ | Example | Comments/Special Characters |
|------------|--------------|---------------------------------------|-----------|-------------------------|-----|------------------|-----|-----------------------|---|--|
| | | | | Min | Max | Min | Max | | | |
| LEN | 2.001 | LOGICAL RECORD LENGTH | N | 2 | 7 | 1 | 1 | 14 | 2.001:909<GS> | |
| IDC | 2.002 | IMAGE DESIGNATION CHARACTER | N | 2 | 2 | 1 | 1 | 9 | 2.002:00<GS> | |
| FFN | 2.003 | FBI FILE NUMBER | N | 10 | 10 | 0 | 1 | 17 | 2.003:2537597861<GS> | |
| QDD | 2.004 | QUERY DEPTH OF DETAIL | A | 1 | 1 | 0 | 1 | 8 | 2.004:0<GS> | |
| RET | 2.005 | RETENTION CODE | A | 1 | 1 | 1 | 1 | 8 | 2.005:Y<GS> | |
| ATN | 2.006 | ATTENTION INDICATOR | ANS | 3 | 30 | 0 | 1 | 37 | 2.006:SA J Q DOE_RM 11867<GS> | Any printable 7-bit ASCII character with the exception of the period is allowed. |
| SCO | 2.007 | SEND COPY TO | ANS | 9 | 19 | 0 | 9 | 186 | 2.007:NY030025P<GS> | Any printable 7-bit ASCII character is allowed. |
| OCA | 2.009 | ORIGINATING AGENCY CASE NUMBER | ANS | 1 | 20 | 0 | 1 | 27 | 2.009:Q880312465<GS> | Any printable 7-bit ASCII character is allowed. |
| CIN | 2.010 | CONTRIBUTOR CASE IDENTIFIER NUMBER | SET | | | 1 | 5 | 131 | 2.010:INCIDENT NUMBER<US>1963BRT715<GS> | Any printable 7-bit ASCII character is allowed. |
| CIN_PRE | 2.010A | CONTRIBUTOR CASE PREFIX (CIN_PRE) | ANS | 1 | 24 | | | | | |
| CIN_ID | 2.010B | CONTRIBUTOR CASE ID (CIN_ID) | ANS | 1 | 24 | | | | | |
| CIX | 2.011 | CONTRIBUTOR CASE IDENTIFIER EXTENSION | N | 2 | 4 | 1 | 5 | 30 | 2.011:23<GS> | |
| LCN | 2.012 | FBI LATENT CASE NUMBER | ANS | 11 | 11 | 1 | 1 | 18 | 2.012:MX-12345678<GS> | First two characters may be AN, followed by hyphen. Remaining characters are AN |
| LCX | 2.013 | FBI LATENT CASE EXTENSION | N | 4 | 4 | 1 | 1 | 11 | 2.013:0001<GS> | |
| FBI | 2.014 | FBI NUMBER | AN | 1 | 9 | 0 | 5 | 56 | 2.014:62760NY12<GS> | |
| SID | 2.015 | STATE IDENTIFICATION NUMBER | ANS | 3 | 10 | 0 | 1 | 17 | 2.015:NY12345678<GS> | NY, OR, and PA may use a hyphen in the last position |
| SOC | 2.016 | SOCIAL SECURITY ACCOUNT NUMBER | N | 9 | 9 | 0 | 4 | 46 | 2.016:220565855<GS> | |
| MNU | 2.017 | MISCELLANEOUS IDENTIFICATION NUMBER | ANS | 4 | 15 | 0 | 4 | 70 | 2.017:PP-1234567890P<GS> | A hyphen is allowed as a special character |
| NAM | 2.018 | NAME | AS | 3 | 30 | 1 | 1 | 37 | 2.018:JONES,ANTHONY P<GS> | Commas, hyphens and blanks are all allowed as special characters. |
| AKA | 2.019 | ALIASES | AS | 3 | 30 | 0 | 10 | 316 | 2.019:JONES,TONY<RS>JONES,A P<GS> | Hyphens, commas, and blanks are all allowed as special characters. |
| POB | 2.020 | PLACE OF BIRTH | A | 2 | 2 | 1 | 1 | 9 | 2.020:VA<GS> | |
| CTZ | 2.021 | COUNTRY OF CITIZENSHIP | A | 2 | 2 | 0 | 1 | 9 | 2.021:US<GS> | |
| DOB | 2.022 | DATE OF BIRTH | N | 8 | 8 | 1 | 5 | 51 | 2.022:19770825<GS> | |
| AGR | 2.023 | AGE RANGE | N | 4 | 4 | 0 | 1 | 11 | 2.023:1619<GS> | Estimated age range entered using a pair of two digit numbers |
| SEX | 2.024 | SEX | A | 1 | 1 | 1 | 1 | 8 | 2.024:M<GS> | |
| RAC | 2.025 | RACE | A | 1 | 1 | 1 | 1 | 8 | 2.025:W<GS> | |
| SMT | 2.026 | SCARS, MARKS, AND TATTOOS | A | 3 | 10 | 0 | 10 | 116 | 2.026:MISS L TOE<GS> | Blanks are allowed as special characters. |
| HGT | 2.027 | HEIGHT | AN | 3 | 3 | 1 | 1 | 10 | 2.027:601<GS> | |

⁴ Field size includes only the number of bytes for the value in the field.

⁵ Max size includes the maximum number of bytes for the field plus the number of possible field separators multiplied by the possible number of occurrences plus the field tag along with the colon ':'.
 * Note: The alpha suffixes shown here on FBTS tags are only to identify subfields. They must never be used in message construction.

Shaded rows indicate element is for Future Capability.

(bdt) Field Tag acronym will be determined at a later date.

Under the Character Type column: A = alpha, B = binary, N = numeric, S = special characters.

Formatted: French (France)

Formatted: Font: 6 pt

Formatted: Indent: Left: 0", First line: 0", Tabs: 0.25", Left

Formatted: Font: 6 pt

Formatted: Font: 6 pt

Formatted: Normal, Indent: Left: 0", First line: 0", Space Before: 0.95 pt, No widow/orphan control, Tabs: 0.25", Left + 0.65", Left

Formatted: Font: 6 pt

Formatted: Font: 6 pt, Font color: Black

Formatted: Tabs: 0.25", Left

Formatted: Font: 6 pt

Formatted: Indent: Left: 0", Tabs: 8.38", Right + Not at 8.5"

Deleted: 002

Deleted: APRIL 1, 2008

Deleted: ¶

Formatted: Position: Horizontal: 5.38", Relative to: Page, Vertical: 0.02", Relative to: Paragraph

Table C-1. Field Edit Specifications for Type-2 Elements

| Identifier | Field | | Character | Field Size ⁴ | | Occurrence Count | | Max Size ⁵ | Example | Comments/Special Characters |
|------------|--------|--------------------------------------|-----------|-------------------------|-----|------------------|-----|-----------------------|---|--|
| | Number | Field Name | | Min | Max | Min | Max | | | |
| HTR | 2.028 | HEIGHT RANGE | AN | 6 | 6 | 0 | 1 | 13 | 2.028:508603<GS> | |
| WGT | 2.029 | WEIGHT | N | 3 | 3 | 1 | 1 | 10 | 2.029:182<GS> | |
| WTR | 2.030 | WEIGHT RANGE | N | 6 | 6 | 0 | 1 | 13 | 2.030:175190<GS> | |
| EYE | 2.031 | COLOR EYES | A | 3 | 3 | 1 | 1 | 10 | 2.031:BLU<GS> | |
| HAI | 2.032 | HAIR COLOR | A | 3 | 3 | 1 | 1 | 10 | 2.032:BRO<GS> | |
| FPC | 2.033 | NCIC FINGERPRINT CLASSIFICATION | AN | 20 | 20 | 0 | 1 | 27 | 2.033:AAXXP158PMXM62POTTDI<GS> | |
| PAT | 2.034 | PATTERN LEVEL CLASSIFICATIONS | SET | | | 0 | 1 | 33 | 2.034:01<US>WU<RS>02<US>LS<RS>03<US>LS<RS>04<US>LS<RS>05<US>LS<RS>06<US>RS<RS>07<US>RS<RS>08<US>LS<RS>09<US>RS<RS>10<US>RS<GS> | |
| FGP | 2.034A | FINGER NUMBER (FGP) | N | 2 | 2 | 1 | 9 | | | |
| PATCL | 2.034B | PATTERN CLASSIFICATION CODE (PATCL) | A | 2 | 2 | 1 | 9 | | | |
| PPA | 2.035 | PALM PRINTS AVAILABLE INDICATOR | A | 1 | 1 | 0 | 1 | 8 | 2.035:Y<GS> | |
| PHT | 2.036 | PHOTO AVAILABLE INDICATOR | A | 1 | 1 | 0 | 1 | 8 | 2.036:Y<GS> | |
| RFP | 2.037 | REASON FINGERPRINTED | ANS | 1 | 75 | 1 | 1 | 82 | 2.037:CONSIDERING FOR EMPLOYMENT<GS> | Commas, blanks, dashes, hyphens, and slashes are all allowed as special characters |
| DPR | 2.038 | DATE PRINTED | N | 8 | 8 | 1 | 1 | 15 | 2.038:19950324<GS> | |
| EAD | 2.039 | EMPLOYER AND ADDRESS | ANS | 1 | 120 | 0 | 1 | 127 | 2.039:ACE CONSTRUCTION COMPANY,327 MAPLE AVE, BUFFALO,NY<GS> | Any printable 7-bit ASCII character is allowed |
| OCP | 2.040 | OCCUPATION | ANS | 1 | 50 | 0 | 1 | 57 | 2.040:PLUMBER<GS> | Any printable 7-bit ASCII character is allowed |
| RES | 2.041 | RESIDENCE OF PERSON FINGERPRINTED | ANS | 1 | 120 | 0 | 1 | 127 | 2.041:5021 OAK LEAF DRIVE, BUFFALO NY, USA., 19970925<GS> | Any printable 7-bit ASCII character is allowed |
| MIL | 2.042 | MILITARY CODE | A | 1 | 1 | 0 | 1 | 8 | 2.042:M<GS> | |
| TSR | 2.043 | TYPE OF SEARCH REQUESTED | A | 1 | 1 | 0 | 1 | 8 | 2.043:P<GS> | |
| GEO | 2.044 | GEOGRAPHICAL AREA OF SEARCH | A | 2 | 2 | 0 | 5 | 21 | 2.044:MD<GS> | |
| DOA | 2.045 | DATE OF ARREST | N | 8 | 8 | 1 | 1 | 15 | 2.045:19950324<GS> | |
| DOS | 2.046 | DATE OF ARREST-SUFFIX | A | 1 | 1 | 0 | 1 | 8 | 2.046:L<GS> | |
| ASL | 2.047 | ARREST SEGMENT LITERAL | SET | | | 1 | 40 | 12,406 | 2.047:DUI<RS>19940920<US>POSSESSION OF FIREARMS<GS> | Any printable 7-bit ASCII character is allowed |
| DOO | 2.047A | DATE OF OFFENSE (DOO) | N | 8 | 8 | 0 | 1 | | | |
| AOL | 2.047B | ARREST OFFENSE LITERAL (AOL) | ANS | 1 | 300 | 1 | 1 | | | Any printable 7-bit ASCII character is allowed |
| CSR | 2.048 | CIVIL SEARCH REQUESTED INDICATOR | A | 1 | 1 | 0 | 1 | 8 | 2.048:Y<GS> | |
| EID | 2.049 | EMPLOYEE IDENTIFICATION NUMBER | AN | 1 | 10 | 0 | 1 | 17 | 2.049:USSS123456<GS> | |
| SEAL | 2.050 | SEAL ARREST FLAG (Future Capability) | A | 1 | 1 | 0 | 1 | 8 | 2.050:N<GS> | |
| CSL | 2.051 | COURT SEGMENT LITERAL | SET | | | 0 | 40 | 24,446 | 2.051:19940930<US>DUI<US>5 DAYS JAIL, PAY COURT COSTS<RS> 19940930<US>POSSESSION OF FIREARMS<US>10 DAYS JAIL, PAY COURT COSTS, \$50<GS> | Any printable 7-bit ASCII character is allowed |

Formatted: Font: 6 pt

Formatted: Indent: Left: 0", First line: 0", Tabs: 0.25", Left

Formatted: Font: 6 pt

Formatted: Font: 6 pt

Formatted: Normal, Indent: Left: 0", First line: 0", Space Before: 0.95 pt, No widow/orphan control, Tabs: 0.25", Left + 0.65", Left

Formatted: Font: 6 pt

Formatted: Font: 6 pt, Font color: Black

Formatted: Tabs: 0.25", Left

Formatted: Font: 6 pt

Formatted: Indent: Left: 0", Tabs: 8.38", Right + Not at 8.5"

Deleted: 002

Deleted: APRIL 1, 2008

Deleted: ¶

Formatted: Position: Horizontal: 5.38", Relative to: Page, Vertical: 0.02", Relative to: Paragraph

* Note: The alpha suffixes shown here on FBTS tags are only to identify subfields. They must never be used in message construction.
 Shaded rows indicate element is for Future Capability.
 (b) Field Tag acronym will be determined at a later date.
 Under the Character Type column: A = alpha, B = binary, N = numeric, S = special characters.

Table C-1. Field Edit Specifications for Type-2 Elements

| Identifier | Field | | Character | Field Size ⁴ | | Occurrence Count | | Max Size ⁵ | Example | Comments/Special Characters |
|-----------------|------------------|--|----------------|-------------------------|--------------|------------------|-----------------|-----------------------|---|--|
| | Number | Field Name | | Min | Max | Min | Max | | | |
| CDD | 2.051A | COURT DISPOSITION DATE (CDD) | N | 8 | 8 | 0 | 1 | | | |
| COL | 2.051B | COURT OFFENSE LITERAL (COL) | ANS | 1 | 300 | 1 | 1 | | | Any printable 7-bit ASCII character is allowed. |
| CPL | 2.051C | OTHER COURT SENTENCE PROVISION LITERAL (CPL) | ANS | 1 | 300 | 0 | 1 | | | Any printable 7-bit ASCII character is allowed. |
| tbcd | 2.052 | REQUEST FOR RAP BACK SERVICE | N | 1 | 1 | 0 | 1 | 8 | 2.052:1<GS> | Deleted: RBR |
| OFC | 2.053 | OFFENSE CATEGORY | N | 1 | 1 | 0 | 1 | 8 | 2.053:1<GS> | |
| SSD | 2.054 | CUSTODY OR SUPERVISORY STATUS - START DATE | N | 8 | 8 | 0 | 1 | 15 | 2.054:19940930<GS> | |
| SLE | 2.055 | CUSTODY OR SUPERVISORY STATUS LITERAL | ANS | 1 | 300 | 0 | 1 | 307 | 2.055:RELEASED BY COURT ORDER.19940930<GS> | Any printable 7-bit ASCII character is allowed. First character must not be blank. |
| ICO | 2.056 | IDENTIFICATION COMMENTS | ANS | 1 | 50 | 0 | 1 | 57 | 2.056:ARMED AND DANGEROUS<GS> | Any printable 7-bit ASCII character is allowed. |
| FNR | 2.057 | FINGER NUMBER(S) REQUESTED | N | 2 | 2 | 0 | 13 | 45 | 2.057:01<RS>06<RS>10<GS> | |
| tbcd | 2.058 | RAP BACK RECIPIENT (Future Capability) | ANS | 9 | 9 | 0 | 3 | 35 | 2.058:NY0303000<GS> | Formatted: Font: 8 pt |
| SRF | 2.059 | SEARCH RESULTS FINDINGS | A | 1 | 1 | 1 | 1 | 8 | 2.059:N<GS> | |
| MSG | 2.060 | STATUS/ERROR MESSAGE | ANS | 1 | 300 | 1 | 11 | 3,317 | 2.060:MATCH MADE AGAINST SUBJECTS FINGERPRINTS ON 05/01/94. PLEASE NOTIFY SUBMITTING STATE IF MATCH RESULTS<GS> | Any printable 7-bit ASCII character is allowed. |
| CST | 2.061 | CASE TITLE | ANS | 1 | 50 | 1 | 1 | 57 | 2.061:ARMED ROBBERY FIRST COUNTY<GS> | Any printable 7-bit ASCII character is allowed. |
| IMT | 2.062 | IMAGE TYPE (IF TYPE -7 or 13 IMAGES) | N | 1 | 2 | 1 | 10 | 36 | 2.062:1<RS>2<RS>3<RS>4<RS>5<GS> | |
| PTD | 2.063 | PERSON TYPE DESIGNATOR | A | 1 | 1 | 1 | 1 | 8 | 2.063:S<GS> | |
| CAN | 2.064 | CANDIDATE LIST | SET | | | 0 | 99 ⁶ | 3967 | 2.064:273849CA2<US>BROWN,JOHN D<RS>83625NY<US>COLLINS,TERRY G<GS> | Commas, hyphens, or blanks are all allowed as special characters. |
| FBI/UCN | 2.064A | UNIVERSAL CONTROL (UCN) NUMBER | AN | 1 | 9 | | | | | |
| NAM | 2.064B | NAME (NAM) | AS | 3 | 30 | | | | | Commas, hyphens, or blanks are all allowed as special characters. |
| RSR | 2.065 | REPOSITORY STATISTICS RESPONSE | ANS | 1 | 32,000 | 1 | 1 | 32,007 | 2.065:(ASCII TEXT DATA)<GS> | Period (as decimal point), Tab (as field delimiter), Newline (as record separator) |
| IFS | 2.066 | IDENTIFICATION FIREARMS SALES (Future Capability) | A | 1 | 1 | 0 | 1 | 8 | 2.066:D<GS> | |
| IMA | 2.067 | IMAGE CAPTURE EQUIPMENT | SET | | | 0 | 1 | 109 | 2.067:DBI<US>1134<US>12345<GS> | Any printable 7-bit ASCII character is allowed. |
| MAK | 2.067A | ORIGINATING FINGERPRINT READING SYSTEM MAKE (MAK) | ANS | 1 | 25 | 1 | 1 | | | Any printable 7-bit ASCII character is allowed. |
| MODL | 2.067B | ORIGINATING FINGERPRINT READING SYSTEM MODEL (MODL) | ANS | 1 | 25 | 1 | 1 | | | Any printable 7-bit ASCII character is allowed. |
| SERNO | 2.067C | ORIGINATING FINGERPRINT READING SYSTEM SERIAL NUMBER (SERNO) | ANS | 1 | 50 | 1 | 1 | | | Any printable 7-bit ASCII character is allowed. |
| ETC | 2.069 | ESTIMATED TIME TO COMPLETE | N | 1 | 4 | 0 | 200 | 1,006 | 2.069:6270<GS> | |
| RAP | 2.070 | REQUEST FOR ELECTRONIC RAP SHEET | A | 1 | 1 | 0 | 1 | 8 | 2.070:Y<GS> | |

⁶ Ten-Print transactions have a limit of 25 and Latent transactions have a limit of 100.
 *Note: The alpha suffixes shown here on FBIS tags are only to identify subfields. They must never be used in message construction.
 Shaded rows indicate element is for Future Capability.
 (tbl) Field Tag acronym will be determined at a later date.
 Under the Character Type column: A = alpha, B = binary, N = numeric, S = special characters.

Deleted: RBR

Deleted: RBRC

Deleted: O

Deleted: CORD OWNER

Formatted: Font: 8 pt

Formatted: Font: 6 pt

Formatted: Indent: Left: 0", First line: 0", Tabs: 0.25", Left

Formatted: Font: 6 pt

Formatted: Font: 6 pt

Formatted: Normal, Indent: Left: 0", First line: 0", Space Before: 0.95 pt, No widow/orphan control, Tabs: 0.25", Left + 0.65", Left

Formatted: Font: 6 pt

Formatted: Font: 6 pt, Font color: Black

Formatted: Tabs: 0.25", Left

Formatted: Font: 6 pt

Formatted: Indent: Left: 0", Tabs: 0.38", Right + Not at 8.5"

Deleted: 002

Deleted: APRIL 1, 2008

Deleted: ¶

Formatted: Position: Horizontal: 5.38", Relative to: Page, Vertical: 0.02", Relative to: Paragraph

Table C-1. Field Edit Specifications for Type-2 Elements

| Identifier | Field | | Character | Field Size ⁴ | | Occurrence Count | | Max Size ⁵ | Example | Comments/Special Characters |
|------------|--------|--|-----------|-------------------------|---------|------------------|-----|-----------------------|--|---|
| | Number | Field Name | | Min | Max | Min | Max | | | |
| ACN | 2.071 | ACTION TO BE TAKEN | ANS | 0 | 300 | 0 | 1 | 307 | 2.071:IF NON-IDENT, SUBMIT TO UNSOLVED LATENT FILE<GS> | Commas, hyphens, ampersands, slashes, number signs, and blanks are all allowed as special characters. |
| FIU | 2.072 | FINGERPRINT IMAGE(S) UPDATED | AN | 1 | 2 | 1 | 3 | 15 | 2.072:01<RS>02<RS>05<RS>07<RS>08<RS>11<RS>13<GS> | |
| CRI | 2.073 | CONTROLLING AGENCY IDENTIFIER | ANS | 1 | 9 | 1 | 3 | 36 | 2.073:NY0303000<GS> | |
| FGP | 2.074 | FINGER POSITION | N | 2 | 2 | 0 | 10 | 36 | 2.074:01<RS>02<RS>03<RS>04<RS>05<RS>06<RS>07<RS>08<RS>09<RS>10<GS> | |
| ERS | 2.075 | ELECTRONIC RAP SHEET | ANS | 4 | 200,000 | 0 | 1 | 200,007 | 2.075:<rap sheet example here><GS> | Any printable 7-bit ASCII character is allowed. |
| PRI | 2.076 | PRIORITY | N | 1 | 1 | 1 | 1 | 8 | 2.076:1<GS> | |
| CFS | 2.077 | CANCEL FINGERPRINT SEARCH | N | 1 | 10 | 0 | 200 | 2,206 | 2.077:3124<GS> | |
| PEN | 2.078 | PENETRATION QUERY RESPONSE | N | 2 | 2 | 1 | 1 | 9 | 2.078:10<GS> | |
| NCR | 2.079 | NUMBER OF CANDIDATES' IMAGES RETURNED | N | 1 | 2 | 0 | 1 | 9 | 2.079:10<GS> | |
| EXP | 2.080 | RESPONSE EXPLANATION | ANS | 1 | 50 | 0 | 1 | 57 | 2.080:PHOTO NOT FOUND FOR SPECIFIED DOA DOS<GS> | Any printable 7-bit ASCII character is allowed. |
| UCN | 2.081 | UNIVERSAL CONTROL NUMBER (Future Capability) | AN | 9 | 9 | 0 | 1 | 16 | 2.081: 410530890<GS> | |
| REC | 2.082 | RESPONSE CODE | A | 1 | 1 | 1 | 1 | 8 | 2.082:Y<GS> | |
| ULF | 2.083 | UNSOLVED LATENT FILE | A | 1 | 1 | 0 | 1 | 8 | 2.083:Y<FS> | |
| AMP | 2.084 | AMPUTATED OR BANDAGED | SET | | | 0 | 1 | 59 | 2.084:03<US>XX<RS>09<US>UP<GS> | |
| FGP | 2.084A | FINGER NUMBER (FGP) | N | 2 | 2 | 1 | 9 | | | |
| AMPCD | 2.084B | AMPUTATED OR BANDAGED CODE (AMPCD) | A | 2 | 2 | 1 | 9 | | | SR can only be entered by an ITN/FBI Service Provider |
| CRN | 2.085 | CIVIL RECORD NUMBER | AN | 9 | 9 | 0 | 1 | 16 | 2.085:V12345678<GS> | |
| SCNA | 2.086 | AFIS SEGMENT CONTROL NUMBER | N | 1 | 10 | 0 | 200 | 2,206 | 2.086:3124<GS> | |
| TAA | 2.087 | TREAT AS ADULT | A | 1 | 1 | 0 | 1 | 8 | 2.087:Y<GS> | |
| NOT | 2.088 | NOTE FIELD | ANS | 1 | 1,000 | 0 | 1 | 1,007 | 2.088:NOTE<GS> | Any printable 7-bit ASCII character is allowed. |
| MSC | 2.089 | MATCHSCORE | N | 1 | 6 | 0 | 99 | 210 | 2.089:1200<GS> | |
| RCD1 | 2.091 | RIDGE CORE DELTA ONE FOR SUBPATTERN CLASSIFICATION | SET | | | 0 | 1 | 65 | 2.091:01<US>13<RS>02<US>06<RS>03<US>11<RS>04<US>10<RS>05<US>11<RS>06<US>11<RS>07<US>12<RS>08<US>10<RS>09<US>13<RS>10<US>11<GS> | |
| FGP | 2.091A | FINGER NUMBER (FGP) | N | 2 | 2 | 1 | 10 | | | |
| RCN1 | 2.091B | RIDGE COUNT NUMBER 1 (RCN1) | N | 1 | 2 | 1 | 10 | | | |
| RCD2 | 2.092 | RIDGE CORE DELTA TWO FOR SUBPATTERN CLASSIFICATION | SET | | | 0 | 1 | 65 | 2.092:01<US>10<RS>02<US>0<RS>03<US>0<RS>04<US>0<RS>05<US>0<RS>06<US>0<RS>07<US>0<RS>08<US>0<RS>09<US>0<RS>10<US>0<GS> | |
| FGP | 2.092A | FINGER NUMBER (FGP) | N | 2 | 2 | 1 | 10 | | | |
| RCN2 | 2.092B | RIDGE COUNT NUMBER 2 (RCN2) | N | 1 | 2 | 1 | 10 | | | |

- Deleted: F
- Formatted: Font: 6 pt
- Formatted: Indent: Left: 0", First line: 0", Tabs: 0.25", Left
- Formatted: Font: 6 pt
- Formatted: Font: 6 pt
- Formatted: Normal, Indent: Left: 0", First line: 0", Space Before: 0.95 pt, No widow/orphan control, Tabs: 0.25", Left + 0.65", Left
- Formatted: Font: 6 pt
- Formatted: Font: 6 pt, Font color: Black
- Formatted: Tabs: 0.25", Left
- Formatted: Font: 6 pt
- Formatted: Indent: Left: 0", Tabs: 8.38", Right + Not at 8.5"
- Deleted: 002
- Deleted: APRIL 1, 2008
- Deleted: ¶
- Formatted: Position: Horizontal: 5.38", Relative to: Page, Vertical: 0.02", Relative to: Paragraph

* Note: The alpha suffixes shown here on FBTS tags are only to identify subfields. They must never be used in message construction.
 Shaded rows indicate element is for Future Capability.
 (dbd) Field Tag acronym will be determined at a later date.
 Under the Character Type column: A = alpha, B = binary, N = numeric, S = special characters.

Table C-1. Field Edit Specifications for Type-2 Elements

| Identifier | Field Number | Field Name | Character | Field Size ⁴ | | Occurrence Count | | Max Size ⁵ | Example | Comments/Special Characters |
|----------------|--------------|--|-----------|-------------------------|-----|------------------|-----|-----------------------|-----------------------------|---|
| | | | | Min | Max | Min | Max | | | |
| SPCN | 2.093 | SPECIAL POPULATION COGNIZANT FILE NUMBER (Future Capability) | AN | 3 | 3 | 0 | 100 | 316 | 2.093:SLC1031234<GS> | |
| CCN | 2.094 | COURT CASE NUMBER (Future Capability) | ANS | 1 | 20 | 0 | 1 | 27 | 2.094:NY123456789<GS> | Any printable 7-bit ASCII character except period is allowed. Embedded blanks are not allowed. CCN must not begin with a blank. |
| RFR | 2.095 | REQUEST FEATURES RECORD (Future Capability) | A | 1 | 1 | 0 | 1 | 8 | 2.095:Y<GS> | |
| RPR | 2.096 | REQUEST PHOTO RECORD (Future Capability) | A | 1 | 1 | 0 | 1 | 8 | 2.096:Y<GS> | |
| NDR | 2.098 | NAME OF DESIGNATED REPOSITORY (Future Capability) | N | 1 | 3 | 0 | 4 | 22 | 2.098:1<GS> | |
| SAN | 2.099 | STATE ARREST NUMBER (Future Capability) | ANS | 0 | 20 | 0 | 1 | 27 | 2.099:NY123456789<GS> | Any printable 7-bit ASCII character is allowed except period (.). Embedded blanks not permitted. Must not begin with blank. |
| T14 | 2.999 | T14 SUBMISSION DATA | A | 1 | 1 | 0 | 1 | 8 | 2.999:Y<GS> | |
| NAM1 | 2.2001 | NAME-ONE (Future Capability) | AS | 1 | 50 | 0 | 1 | 58 | 2.2001:BRIAN<GS> | Any 7-bit non-Ctrl character |
| NAM2 | 2.2002 | NAME-TWO (Future Capability) | AS | 1 | 50 | 0 | 1 | 58 | 2.2002:DAVID<GS> | Any 7-bit non-Ctrl character |
| NAM3 | 2.2003 | NAME-THREE (Future Capability) | AS | 1 | 50 | 0 | 1 | 58 | 2.2003:SMITH<GS> | Any 7-bit non-Ctrl character |
| NAM4 | 2.2004 | NAME-FOUR (Future Capability) | AS | 1 | 50 | 0 | 1 | 58 | 2.2004:MAHFOUZ<GS> | Any 7-bit non-Ctrl character |
| NAM5 | 2.2005 | NAME-FIVE (Future Capability) | AS | 1 | 50 | 0 | 1 | 58 | 2.2005:al ARABI<GS> | Any 7-bit non-Ctrl character |
| CSF | 2.2006 | CASCADED SEARCH FLAG (Future Capability) | A | 2 | 2 | 0 | 1 | 10 | 2.2006:CR<GS> | |
| SDOB | 2.2007 | SUBMITTED DATE OF BIRTH (Future Capability) | N | 8 | 8 | 0 | 1 | 16 | 2.2007:10470123<GS> | |
| SNAM | 2.2008 | SUBMITTED NAME (Future Capability) | AS | 3 | 30 | 0 | 1 | 38 | 2.2008:JONES, ANTHONY P<GS> | Commas, hyphens and blanks are all allowed as special characters. |
| PTY | 2.2009 | PHOTO TYPE (Future Capability) | N | 1 | 1 | 0 | 1 | 9 | 2.2009:1<GS> | |
| NIR | 2.2010 | NUMBER OF IMAGES REQUESTED (Future Capability) | N | 0 | 2 | 0 | 1 | 10 | 2.2010:2<GS> | |
| tbd | 2.2011 | RAP BACK VERIFICATION STATUS (Future Capability) | A | 1 | 1 | 0 | 1 | 9 | 2.2011:Y<GS> | |
| IIR | 2.2012 | IRIS IMAGES REQUESTED (Future Capability) | N | 1 | 1 | 0 | 1 | 9 | 2.2012:0<GS> | |
| DMI | 2.2013 | DISPOSITION MAINTENANCE INDICATOR (Future Capability) | A | 1 | 1 | 0 | 1 | 9 | 2.2013:A<GS> | |
| tbd | 2.2014 | RAP BACK ELIGIBILITY (Future Capability) | A | 1 | 1 | 0 | 1 | 9 | 2.2014:Y<GS> | |
| tbd | 2.2015 | RAP BACK EXPIRATION DATE (Future Capability) | N | 8 | 8 | 0 | 1 | 18 | 2.2015:20100101<GS> | |
| DNAF | 2.2016 | DNA FLAG (Future Capability) | A | 1 | 1 | 0 | 1 | 9 | 2.2016:N<GS> | |
| DORI | 2.2017 | DNA LOCATION (Future Capability) | AN | 9 | 9 | 0 | 1 | 18 | 2.2017:TX9876543<GS> | |
| DNAC | 2.2018 | DNA IN CODIS FLAG (Future Capability) | N | 1 | 1 | 0 | 1 | 9 | 2.2018:Y<FS> | |

- Deleted: RBVS
- Deleted: RBE
- Deleted: REXP
- Deleted: ¶
Under the Character Type column: A = alpha, B = binary, N = numeric, S = special characters.¶
- Formatted: Font: 6 pt
- Formatted: Indent: Left: 0", First e: 0", Tabs: 0.25", Left
- Formatted: Font: 6 pt
- Formatted: Font: 6 pt
- Formatted: Normal, Indent: Left: 0", First line: 0", Space Before: 0.95", No widow/orphan control, Tabs: 0.25", Left + 0.65", Left
- Formatted: Font: 6 pt
- Formatted: Font: 6 pt, Font color: black
- Formatted: Tabs: 0.25", Left
- Formatted: Font: 6 pt
- Formatted: Indent: Left: 0", Tabs: 0.38", Right + Not at 8.5"
- Deleted: 002
- Deleted: APRIL 1, 2008
- Deleted: ¶
- Formatted: Position: Horizontal: 5.38", Relative to: Page, Vertical: 0.02", Relative to: Paragraph

* Note: The alpha suffixes shown here on FBTS tags are only to identify subfields. They must never be used in message construction.
 Shaded rows indicate element is for Future Capability.
 (tbd) Field Tag acronym will be determined at a later date.
 Under the Character Type column: A = alpha, B = binary, N = numeric, S = special characters.

APPENDIX D

SUMMARY LOGICAL RECORD LAYOUTS FOR TYPE-2 (TENPRINT)

1.0 Introduction

Appendix D presents the summary logical record layouts for tenprint transactions. The CAR and SRE transactions were presented in detail by Tables D-1 and D-2, respectively. However, with detail added to Table C-1 and the summary in Table D-3, Tables D-1 and D-2 have been removed from this version of the EBTS. Table D-3 is a summary representation of all tenprint transactions. For detailed specifications of individual fields of these record sets, see Appendix C.

Deleted: ¶
Deleted: .
Deleted: ¶
Deleted: are
Deleted: the byte counts do not account for any separator characters.
Deleted: Notes for Tables D-1 through D-3 are given in Table D-4.

2.0 Interpretation of Table D-3

Table D-3 summarizes what formerly required 15 tables in Appendix D. The column headers at the top of the page select a particular transaction. The row headers in the left margin give the tag number and ID for each field. The cell at the intersection of any given row and column gives summary information about the use of that field (row) in that transaction (column). If that cell is blank, the field is not used in that record. Otherwise, the number at the right in the cell gives the maximum number of occurrences of that field for that record. If the cell is shaded, then the field's inclusion is optional for that record; unshaded cells indicate mandatory inclusion. The diagonal pattern represents future initiatives, field tags, and type of transactions. In all cases, the minimum number of occurrences for a mandatory field is one, and zero for an optional field. Finally, the superscript in the upper left-hand corner of the cell is a reference to any note (see Appendix D Reference Notes following Table D-3) pertaining to the use of that field in the record.

Deleted: Note: The remarks about the interpretation of Table D-3 also apply to Tables E-1 and E-2.¶

IAFIS-DOC-01078-8.1

D-1

XXXX 99, 9999

Deleted: 002
Formatted: Tabs: 6.38", Right +
Not at 5.72"
Deleted: APRIL 1, 2008

Table D-1. Field List for Tenprint, Answer-Required (CAR) Transaction

NOTE: This table has been removed. Detail on the elements for the transactions can be found in Table C-1. Optional and Required fields are summarized in Table D-3.

| IAFIS-DOC-01078-8.1

D-2

~~XXXXXX 99, 9999~~

Formatted: Tabs: 8.88", Right +
Not at 5.72"
Deleted: 002
Deleted: . . . APRIL 1, 2008

Table D-2. Field List for Tenprint Response, Electronic (SRE) Transaction

Deleted:

NOTE: This table has been removed. Detail on the elements for the transactions can be found in Table C-1. Optional and Required fields are summarized in Table D-3.

Deleted: 002
Formatted: Tabs: 8.88", Right +
Not at 5.72"
Deleted: . . . APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 1 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | AMN | CAR | CNA | CPDR | CPNU | DEK | DEU | DOCE | DSPE | DSPR | EMUF | ERRT | FANC | FAUF | FDSP | FNDR | FVR |
|-----------|-----|-----|-----|------|------|-----|-----|------|------|------|------|------|------|------|------|------|-----|
| 2.001 LEN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | 1 | 1 | 1 | | 1 | |
| 2.002 IDC | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | 1 | 1 | 1 | | 1 | |
| 2.005 RET | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.006 ATN | 1 | 1 | | 1 | 1 | 1 | 1 | 1 | | | 1 | 1 | 1 | 1 | | 1 | |
| 2.007 SCO | 9 | 9 | | 9 | 9 | 9 | 9 | 9 | | | 9 | 9 | 9 | 9 | | 9 | |
| 2.009 OCA | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | 1 | 1 | 1 | | 1 | |
| 2.014 FBI | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | | | 5 | 5 | 5 | 5 | | 5 | |
| 2.015 SID | | 6 | 1 | 6 | 1 | 6 | 1 | 6 | 1 | | 1 | 1 | | | | | |
| 2.016 SOC | | 4 | 4 | 4 | 4 | 4 | 4 | 4 | | | 4 | | 4 | 4 | | 4 | |
| 2.017 MNU | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | | | 4 | 4 | 3 | 4 | 3 | 4 | |
| 2.018 NAM | 4 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 1 | | 1 | | 1 | 1 | | 1 | |
| 2.019 AKA | | 10 | 10 | 10 | 10 | 10 | | 10 | | | 10 | | 10 | 10 | | 10 | |
| 2.020 POB | | 1 | 1 | 1 | 1 | 1 | | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.021 CTZ | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.022 DOB | 4 | 5 | 5 | 5 | 5 | 5 | 4 | 5 | 5 | | 5 | | 5 | 5 | | 5 | |
| 2.024 SEX | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.025 RAC | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.026 SMT | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | | | 10 | | 10 | 10 | | 10 | |

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Formatted: Tabs: 8.88", Right +
Not at 5.72"
Deleted: 002
Deleted: . . . APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 1 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | AMN | CAR | CNA | CPDR | CPNU | DEK | DEU | DOCE | DSPE | DSPR | EMUF | ERRT | FANC | FAUF | FDSP | FNDR | FVR |
|-----------|-----|------|------|------|------|-----|-----|------|------|------|------|------|------|------|------|------|-----|
| 2.027 HGT | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.029 WGT | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.031 EYE | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.032 HAI | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.034 PAT | | | | | | | | | | | | | | | | | |
| 2.035 PPA | | 1 | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.036 PHT | | 1 | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.037 RFP | | | | | | | | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.038 DPR | 1 | | | | | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.039 EAD | | 1 | 1 | 1 | 1 | 1 | | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.040 OCP | | 1 | 1 | 1 | 1 | | | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.041 RES | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.042 MIL | | | | | | | | | | | 1 | | 1 | 1 | | 1 | |
| 2.043 TSR | | | | 1 | 1 | | | 1 | | | 1 | | | 1 | | 1 | |
| 2.045 DOA | | 1 | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.047 ASL | | 2 40 | 2 40 | 2 40 | 2 40 | | | | | | | | | | | | |
| 2.048 CSR | 1 | | | | | | 1 | | | | | | | | | | |
| 2.051 CSL | | 40 | 40 | 40 | 40 | | | | | | | | | | | | |

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Formatted: Tabs: 8.88", Right +
Not at 5.72"
Deleted: 002
Deleted: . . . APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 1 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | AMN | CAR | CNA | CPDR | CPNU | DEK | DEU | DOCE | DSPE | DSPR | EMUF | ERRT | FANC | FAUF | FDSP | FNDR | FVR |
|------------|-----|-----|-----|------|------|-----|-----|------|------|------|------|------|------|------|------|------|-----|
| 2.052 *tbd | | | | | | | | | | | | | | | | | |
| 2.054 SSD | | 1 | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.055 SLE | | 9 1 | 9 1 | 9 1 | 9 1 | | | | | | | | | | | | |
| 2.056 ICO | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | |
| 2.057 FNR | | | | | | | | | | | | | | | | | |
| 2.059 SRF | | | | | | | | | | | | | | | | | |
| 2.060 MSG | | | | | | | | | | | | 11 | | | | | |
| 2.064 CAN | | | | | | | | | | | | | | | | | |
| 2.067 IMA | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.070 RAP | 1 | 1 | | 1 | 1 | 1 | 1 | 1 | | | 1 | | 1 | 1 | | 1 | |
| 2.071 ACN | 1 | | | | | | | | | | | | | | | | |
| 2.073 CRI | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | | | 3 | 3 | 3 | 3 | | 3 | |
| 2.075 ERS | | | | | | | | | | | | | | | | | |
| 2.081 UCN | | | | | | | | | | | | | | | | | |
| 2.084 AMP | 7 1 | 7 1 | 7 1 | 7 1 | 7 1 | 7 1 | 7 1 | 7 1 | | | 7 1 | | 7 1 | 7 1 | | 7 1 | |
| 2.085 CRN | | | | | | | | | | | | | | | | | |
| 2.087 TAA | | 1 | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.091 RCD1 | | | | | | | | | | | | | | | | | |

Deleted: RBR

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

* Field Tag acronym will be determined at a later date.

Deleted: 002

Formatted: Tabs: 8.88", Right +
Not at 5.72"

Deleted: ... APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 1 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | AMN | CAR | CNA | CPDR | CPNU | DEK | DEU | DOCE | DSPE | DSPR | EMUF | ERRT | FANC | FAUF | FDSP | FNDR | FVR |
|-------------|-----|-----|-----|------|------|-----|-----|------|------|------|------|------|------|------|------|------|-----|
| 2.092 RCD2 | | | | | | | | | | | | | | | | | |
| 2.094 CCN | | | | | | | | | | | | | | | | | |
| 2.098 NDR | | | | | | | | | | | | | | | | | |
| 2.099 SAN | | | | | | | | | | | | | | | | | |
| 2.2001 NAM1 | | | | | | | | | | | | | | | | | |
| 2.2002 NAM2 | | | | | | | | | | | | | | | | | |
| 2.2003 NAM3 | | | | | | | | | | | | | | | | | |
| 2.2004 NAM4 | | | | | | | | | | | | | | | | | |
| 2.2005 NAM5 | | | | | | | | | | | | | | | | | |
| 2.2006 CSF | | | | | | | | | | | | | | | | | |
| 2.2007 SDOB | | | | | | | | | | | | | | | | | |
| 2.2008 SNAM | | | | | | | | | | | | | | | | | |
| 2.2011 *tbd | | | | | | | | | | | | | | | | | |
| 2.2013 DMI | | | | | | | | | | | | | | | | | |
| 2.2014 *tbd | | | | | | | | | | | | | | | | | |
| 2.2015 *tbd | | | | | | | | | | | | | | | | | |

Deleted: RBVS

Deleted: RBE

Deleted: REXP

Deleted: BRO

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

* Field Tag acronym will be determined at a later date.

Formatted: Left

Deleted: 002

Formatted: Tabs: 8.88", Right + Not at 5.72"

Deleted: . . . APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 2 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | IIE | IIE R | ITF | ITFR | MAP | MPR | NFAP | NFUE | NFUF | NNDR | PPE | PPR |
|-----------|-----|------------------|-----|------|-----|-----|------|------|------|------|-----|-----|
| 2.001 LEN | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.002 IDC | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.005 RET | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.006 ATN | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.007 SCO | | | | | 9 | 9 | 9 | 9 | 9 | 9 | | |
| 2.009 OCA | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.014 FBI | | | | | 5 | | 5 | 5 | 5 | 5 | | |
| 2.015 SID | | | | | 1 | | 1 | 1 | 1 | | | |
| 2.016 SOC | | | | | 4 | 4 | 4 | 4 | 4 | 4 | | |
| 2.017 MNU | | | | | 4 | 4 | 4 | 4 | 4 | 3 4 | | |
| 2.018 NAM | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.019 AKA | | | | | 10 | 10 | 10 | 10 | 10 | 10 | | |
| 2.020 POB | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.021 CTZ | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.022 DOB | | | | | 5 | 5 | 5 | 5 | 5 | 5 | | |
| 2.024 SEX | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.025 RAC | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.026 SMT | | | | | 10 | 10 | 10 | 10 | 10 | 10 | | |

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Formatted: Tabs: 8.88", Right +
 Not at 5.72"
 Deleted: 002
 Deleted: . . . APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 2 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | IIE | IIE R | ITF | ITFR | MAP | MPR | NFAP | NFUE | NFUF | NNDR | PPE | PPR |
|-----------|-----|-------|-----|------|-----|-----|------|------|------|------|-----|-----|
| 2.027 HGT | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.029 WGT | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.031 EYE | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.032 HAI | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.034 PAT | | | | | | | | | | | | |
| 2.035 PPA | | | | | | | | | | | | |
| 2.036 PHT | | | | | | | | | | | | |
| 2.037 RFP | | | | | 1 | | 1 | 1 | 1 | 1 | | |
| 2.038 DPR | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.039 EAD | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.040 OCP | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.041 RES | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.042 MIL | | | | | | | | | | 1 | | |
| 2.043 TSR | | | | | | | 1 | 1 | 1 | 1 | | |
| 2.045 DOA | | | | | | | | | | | | |
| 2.047 ASL | | | | | | | | | | | | |
| 2.048 CSR | | | | | | 1 | | | | | | |
| 2.051 CSL | | | | | | | | | | | | |

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Formatted: Tabs: 8.88", Right +
 Not at 5.72"
 Deleted: 002
 Deleted: . . . APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 2 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | IIE | IIEER | ITF | ITFR | MAP | MPR | NFAP | NFUE | NFUF | NNDR | PPE | PPR |
|------------|-----|-------|-----|------|-----|-----|------|------|------|------|-----|-----|
| 2.052 *tbd | | | | | | | | | | | | |
| 2.054 SSD | | | | | | | | | | | | |
| 2.055 SLE | | | | | | | | | | | | |
| 2.056 ICO | | | | | | 1 | | | | | | |
| 2.057 FNR | | | | | | | | | | | | |
| 2.059 SRF | | | | | | | | | | | | |
| 2.060 MSG | | | | | | | | | | | | |
| 2.064 CAN | | | | | | | | | | | | |
| 2.067 IMA | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.070 RAP | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 2.071ACN | | | | | | 1 | | | | | | |
| 2.073 CRI | | | | | 3 | 3 | 3 | 3 | 3 | 3 | | |
| 2.075 ERS | | | | | | | | | | | | |
| 2.081 UCN | | | | | | | | | | | | |
| 2.084 AMP | | | | | 7 | 1 | 7 | 1 | 7 | 1 | 7 | 1 |
| 2.085 CRN | | | | | | | | | | | | |
| 2.087 TAA | | | | | | | | | | | | |
| 2.091 RCD1 | | | | | | | | | | | | |

Deleted: RBR

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

* Field Tag acronym will be determined at a later date.

Deleted: 002
Formatted: Tabs: 8.88", Right +
Not at 5.72"
Deleted: ... APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 2 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | IIE | IIER | ITF | ITFR | MAP | MPR | NFAP | NFUE | NFUF | NNDR | PPE | PPR |
|-------------|-----|------|-----|------|-----|-----|------|------|------|------|-----|-----|
| 2.092 RCD2 | | | | | | | | | | | | |
| 2.094 CCN | | | | | | | | | | | | |
| 2.096 RPR | | | | | | | | | | | | |
| 2.098 NDR | | | | | | | | | | | | |
| 2.099 SAN | | | | | | | | | | | | |
| 2.2001 NAM1 | | | | | | | | | | | | |
| 2.2002 NAM2 | | | | | | | | | | | | |
| 2.2003 NAM3 | | | | | | | | | | | | |
| 2.2004 NAM4 | | | | | | | | | | | | |
| 2.2005 NAM5 | | | | | | | | | | | | |
| 2.2006 CSF | | | | | | | | | | | | |
| 2.2007 SDOB | | | | | | | | | | | | |
| 2.2008 SNAM | | | | | | | | | | | | |
| 2.2011 *tbd | | | | | | | | | | | | |
| 2.2013 DMI | | | | | | | | | | | | |
| 2.2014 *tbd | | | | | | | | | | | | |
| 2.2015 *tbd | | | | | | | | | | | | |

Deleted: RBVS

Deleted: RBE

Deleted: REXP

Deleted: BRO

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

* Field Tag acronym will be determined at a later date.

Formatted: Left

Deleted: 002

Formatted: Tabs: 8.88", Right +
Not at 5.72"

Deleted: . . . APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions

Part 3 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | RPIS | RPSR | SRE | SRT | TPFS | TPIS | TPRS |
|-----------|------|------|-----|-----|------|------|------|
| 2.001 LEN | | | 1 | 1 | 1 | 1 | 1 |
| 2.002 IDC | | | 1 | 1 | 1 | 1 | 1 |
| 2.005 RET | | | | | | | |
| 2.006 ATN | | | 1 | 1 | 1 | 1 | 1 |
| 2.007 SCO | | | 9 | 9 | 9 | 9 | 9 |
| 2.009 OCA | | | 1 | 1 | 1 | 1 | 1 |
| 2.014 FBI | | | s 1 | | | | |
| 2.015 SID | | | 1 | | 1 | 1 | |
| 2.016 SOC | | | | | 4 | 4 | |
| 2.017 MNU | | | | | 4 | 4 | 1 |
| 2.018 NAM | | | 1 | | 1 | 1 | |
| 2.019 AKA | | | | | 10 | 10 | |
| 2.020 POB | | | | | 1 | 1 | |
| 2.021 CTZ | | | | | 1 | 1 | |
| 2.022 DOB | | | | | 5 | 5 | |
| 2.024 SEX | | | | | 1 | 1 | 1 |
| 2.025 RAC | | | | | 1 | 1 | |
| 2.026 SMT | | | | | 10 | 10 | |

Formatted Table

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Deleted: 002
 Formatted: Tabs: 8.88", Right +
 Not at 5.72"
 Deleted: ... APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 3 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | RPIS | RPSR | SRE | SRT | TPFS | TPIS | TPRS |
|-----------|------|------|-----|-----|------|------|------|
| 2.027 HGT | | | | | 1 | 1 | |
| 2.029 WGT | | | | | 1 | 1 | |
| 2.031 EYE | | | | | 1 | 1 | |
| 2.032 HAI | | | | | 1 | 1 | |
| 2.034 PAT | | | | | 1 | 7 1 | 7 1 |
| 2.035 PPA | | | | | 1 | 1 | |
| 2.036 PHT | | | | | 1 | 1 | |
| 2.037 RFP | | | | | | | |
| 2.038 DPR | | | | | | | |
| 2.039 EAD | | | 1 | 1 | 1 | 1 | 1 |
| 2.040 OCP | | | 1 | 1 | 1 | 1 | 1 |
| 2.041 RES | | | 1 | 1 | 1 | 1 | 1 |
| 2.042 MIL | | | | | | | |
| 2.043 TSR | | | | | | | |
| 2.045 DOA | | | | | | | |
| 2.047 ASL | | | | | | | |
| 2.048 CSR | | | | | | | |
| 2.051 CSL | | | | | | | |

Formatted Table

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Deleted: 002
Formatted: Tabs: 8.88", Right +
Not at 5.72"
Deleted: ... APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 3 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | RPIS | RPSR | SRE | SRT | TPFS | TPIS | TPRS |
|------------|------|------|-----|-----|------|------|------|
| 2.052 *tbd | | | | | | | |
| 2.054 SSD | | | | | | | |
| 2.055 SLE | | | | | | | |
| 2.056 ICO | | | | | | | |
| 2.057 FNR | | | | | 13 | 13 | |
| 2.059 SRF | | | 1 | | | | |
| 2.060 MSG | | | | | | | |
| 2.064 CAN | | | | 25 | | | |
| 2.067 IMA | | | | | | | |
| 2.070 RAP | | | | | | | 1 |
| 2.071 ACN | | | | | | | |
| 2.073 CRI | | | 3 | 3 | 3 | 3 | 3 |
| 2.075 ERS | | | 1 | | | | |
| 2.081 UCN | | | | | | | |
| 2.084 AMP | | | | 1 | | | |
| 2.085 CRN | | | s 1 | | | | |
| 2.087 TAA | | | 1 | | | | |
| 2.091 RCD1 | | | | | 1 | 1 | |

Formatted Table
 Deleted: RBR

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor).

* Field Tag acronym will be determined at a later date.

Deleted: ¶
 Formatted: Left, Border: Top: (No border)
 Deleted: 002
 Formatted: Tabs: 8.88", Right + Not at 5.72"
 Deleted: . . . APRIL 1, 2008

Table D-3. Summary Field Lists for Biometric Transactions
Part 3 of 3 (Maximum Occurrences of Each Element for Each Logical Record Type)

| Tag Elem | RPIS | RPSR | SRE | SRT | TPFS | TPIS | TPRS |
|-------------|------|------|-----|-----|------|------|------|
| 2.092 RCD2 | | | | | 1 | 1 | |
| 2.094 CCN | | | | | | | |
| 2.096 RPR | | | | | | | |
| 2.098 NDR | | | | | | | |
| 2.099 SAN | | | | | | | |
| 2.2001 NAM1 | | | | | | | |
| 2.2002 NAM2 | | | | | | | |
| 2.2003 NAM3 | | | | | | | |
| 2.2004 NAM4 | | | | | | | |
| 2.2005 NAM5 | | | | | | | |
| 2.2006 CSF | | | | | | | |
| 2.2007 SDOB | | | | | | | |
| 2.2008 SNAM | | | | | | | |
| 2.2011 *tbd | | | | | | | |
| 2.2013 DMI | | | | | | | |
| 2.2014 *tbd | | | | | | | |
| 2.2015 *tbd | | | | | | | |
| | | | | | | | |

Deleted: RBVS

Deleted: RBE

Deleted: REXP

Deleted: BRO

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)
 * Field Tag acronym will be determined at a later date.

Deleted: 002

Formatted: Tabs: 8.88", Right +
Not at 5.72"

Deleted: . . . APRIL 1, 2008

APPENDIX D REFERENCE NOTES

1. For this transaction, this field must contain a "Y."
2. The DOO portion of this field is optional, but should be provided if known.
3. This field is mandatory for applicant submissions from DIS and OPM.
4. It is obviously not expected that full Name and Date of Birth of Unknown Deceased and Amnesia victims will be known. These fields, however, must be submitted with formatted information.
5. FBI number must be present if known for inquiry prints.
6. Field is mandatory if fingerprint submission is from an NFF State.
7. This field is mandatory if any finger is either amputated or a rolled impression was not made.
8. Either an FBI number or a Civil Record Number (CRN) may be returned, but not both, depending upon transaction results. No number (neither FBI nor CRN) is returned when none is assigned (e.g., Non-Ident with RET = "N"). FBI number will be returned for any submission resulting in an Ident against the Criminal File or when a Non-Ident results in an add to the Criminal File. CRN will be returned when a submission results in a **Non-Ident which causes an add to** the Civil file.
9. CSL and ASL must be included where submission includes SLE.

Deleted: n
Deleted: against a subject in
Deleted: only

Deleted: 002
Formatted: Tabs: 6.5", Right + Not at 5.72"
Deleted: APRIL 1, 2008

APPENDIX E

Formatted: Top: 1.25", Width: 8.5", Height: 11"

SUMMARY LOGICAL RECORD LAYOUTS FOR TYPE-2 (LATENT)

1.0 Introduction

Appendix E presents the summary logical record layouts for latent transactions. Tables E-1 and E-2 are the summarized representation of all latent transactions. For detailed specifications of individual fields of these record sets, see Appendix C.

2.0 Interpretation of the Tables

The column headers at the top of the page select a particular transaction. The row headers in the left margin give the tag number and ID for each field. The cell at the intersection of any given row and column gives summary information about the use of that field (row) in that transaction (column). If that cell is blank, the field is not used in that record. Otherwise, the number at the right in the cell gives the maximum number of occurrences of that field for that record. If the cell is shaded, then the field's inclusion is optional for that record; unshaded cells indicate mandatory inclusion. The diagonal pattern represents future initiatives, field tags, and type of transactions. In all cases, the minimum number of occurrences for a mandatory field is one, and zero for an optional field. Finally, the superscript in the upper left-hand corner of the cell is a reference to any note (see Appendix E Reference Notes following Table E-2) pertaining to the use of that field in the record.

Formatted: Normal

IAFIS-DOC-01078-8.1

E-1

XXXXX 99, 9999

Deleted: 002

Formatted: Tabs: 3.13", Centered + 6.38", Right + Not at 3" + 5.72"

Deleted: . .

Deleted:

Deleted: APRIL 1, 2008

Deleted: ¶

Formatted: Right: 0.75"
Formatted: Normal

Table E-1. Summary Field Lists for Latent Transactions (Part 1 of 2)
(Maximum Occurrences of Each Field for Each Logical Record Type)

| Tag | Elem | LFS | CFS | MCS | ELR | LSR | NAR | ERRL | LFIS | LFFS | LPNQ | SRL | LPNR | ULM | ULD | ULAC | ULAR |
|-------|------|-----|-----|-----|-----|-----|-----|------|------|------|------|-----|------|-----|-----|------|------|
| 2.001 | LEN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.002 | IDC | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.003 | FFN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | |
| 2.004 | QDD | | | | | | | | | | | | | | | | |
| 2.005 | RET | | 1 | 1 | | | | | | | | | | | | | |
| 2.006 | ATN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.007 | SCO | 9 | 9 | 9 | 9 | 9 | 9 | 9 | 9 | 9 | | 9 | | | 9 | 9 | |
| 2.010 | CIN | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.011 | CIX | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.012 | LCN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.013 | LCX | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.014 | FBI | | 1 | 1 | | 5 | 1 | | | | | | | 1 | | | |
| 2.015 | SID | | 1 | 1 | | 5 | 5 | | | | | | | | | | |
| 2.016 | SOC | | 4 | 4 | | 6 | 4 | | | | | | | | | | |
| 2.017 | MNU | 4 | 4 | 4 | 4 | 6 | 4 | 4 | 4 | | | | | | | | |
| 2.018 | NAM | | 1 | 1 | | 5 | 1 | | | | | | | 1 | | | |
| 2.019 | AKA | | 10 | 10 | | 6 | 10 | | | | | | | 10 | | | |
| 2.020 | POB | 1 | 1 | 1 | | 5 | 1 | | 1 | 1 | 1 | | | 1 | | | |
| 2.021 | CTZ | | 1 | 1 | | 6 | 1 | | | | | | | 1 | | | |
| 2.022 | DOB | | 5 | 5 | | 6 | 5 | | | | | | | 5 | | | |
| 2.023 | AGR | 1 | | | | | | | 1 | 1 | 1 | | | | | | |
| 2.024 | SEX | 1 | 1 | 1 | | 6 | 1 | | 1 | 1 | 1 | | | 1 | | | |
| 2.025 | RAC | 1 | 1 | 1 | | 6 | 1 | | 1 | 1 | 1 | | | 1 | | | |
| 2.026 | SMT | 10 | 10 | 10 | | 6 | 10 | | 10 | 10 | 10 | | | 10 | | | |
| 2.027 | HGT | | 1 | 1 | | 6 | 1 | | | | | | | 1 | | | |
| 2.028 | HTR | 1 | | | | | | | 1 | 1 | 1 | | | | | | |

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Formatted: Indent: First line: 0.13", Tabs: 4.5", Centered + 9.25", Right + Not at 3" + 5.72"
Deleted: 002
Deleted: ...
Deleted: ...
Deleted: APRIL 1, 2008
Deleted: ¶

Table E-1. Summary Field Lists for Latent Transactions (Part 1 of 2)
(Maximum Occurrences of Each Field for Each Logical Record Type)

| Tag | Elem | LFS | CFS | MCS | ELR | LSR | NAR | ERRL | LFIS | LFFS | LPNQ | SRL | LPNR | ULM | ULD | ULAC | ULAR |
|-------|------|-----------------|------------------|------------------|-----------------|----------------|-----|------|------|------|------|-----|------|-----|-----|------|------|
| 2.029 | WGT | | 1 | 1 | | ⁶ 1 | | | | | | | | 1 | | | |
| 2.030 | WTR | 1 | | | | | | | 1 | 1 | 1 | | | | | | |
| 2.031 | EYE | 1 | 1 | 1 | | ⁶ 1 | | | 1 | 1 | 1 | | | 1 | | | |
| 2.032 | HAI | 1 | 1 | 1 | | ⁶ 1 | | | 1 | 1 | 1 | | | 1 | | | |
| 2.033 | FPC | | | | | 1 | | | | | | | | | | | |
| 2.034 | PAT | 1 | 1 | 1 | | ⁶ 1 | | | 1 | 1 | 1 | | | | | | |
| 2.035 | PPA | | 1 | | | 1 | | | | | | | | 1 | | | |
| 2.036 | PHT | | 1 | 1 | | 1 | | | | | | | | 1 | | | |
| 2.037 | RFP | | | 1 | | | | | | | | | | | | | |
| 2.038 | DPR | | 1 | 1 | 1 | 1 | | | | | | | | 1 | | | |
| 2.039 | EAD | | 1 | 1 | | | | | | | | | | | | | |
| 2.040 | OCP | | 1 | 1 | | | | | | | | | | | | | |
| 2.041 | RES | | 1 | 1 | | | | | | | | | | | | | |
| 2.042 | MIL | | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.044 | GEO | 5 | | 5 | 5 | | | | 5 | 5 | 5 | | | | | | |
| 2.045 | DOA | | ⁴ 1 | 1 | 1 | | | | | | | | | | | | |
| 2.046 | DOS | | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.047 | ASL | ³ 40 | 40 | ³ 40 | ³ 40 | | | | | | | | | | | | |
| 2.049 | EID | | | | | | | | | | | | | | | | |
| 2.051 | CSL | | ¹⁰ 40 | ¹⁰ 40 | | | | | | | | | | | | | |
| 2.053 | OFC | 1 | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.054 | SSD | | 1 | 1 | | | | | | | | | | | | | |
| 2.055 | SLE | | ¹⁰ 1 | ¹⁰ 1 | | | | | | | | | | | | | |
| 2.056 | ICO | | ⁴ 1 | 1 | | | | | | | | | | | | | |
| 2.058 | ITD | 1 | | | | | | | | | | | | | | | |
| 2.059 | SRF | | | | | 1 | | | | | | | | | | | |
| 2.060 | MSG | | | | | 1 | 1 | 11 | | | | | | | | | |

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

- Formatted: Indent: First line: 0.13", Tabs: 4.5", Centered + 9.25", Right + Not at 3" + 5.72"
- Deleted: 002
- Deleted: . . .
- Deleted:
- Deleted: APRIL 1, 2008
- Deleted: ¶

Table E-1. Summary Field Lists for Latent Transactions (Part 1 of 2)
(Maximum Occurrences of Each Field for Each Logical Record Type)

| Tag | Elem | LFS | CFS | MCS | ELR | LSR | NAR | ERRL | LFIS | LFFS | LPNQ | SRL | LPNR | ULM | ULD | ULAC | ULAR |
|--------|------|-----|-----|-----|-----|-----|-----|------|------|------|------|-----|------|-----|-----|------|------|
| 2.061 | CST | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | |
| 2.062 | IMT | 10 | 10 | 10 | 10 | | | | | | | | | | | | |
| 2.063 | PTD | | 1 | | | | | | | | | | | | | | |
| 2.064 | CAN | | | | | | | | | | | 99 | | | | | |
| 2.065 | RSR | | | | | | | | | | | | | | | | |
| 2.067 | IMA | 1 | 1 | 1 | 1 | | | | 1 | | | | | | | | |
| 2.069 | ETC | | | | | | | | | | | | | | | | |
| 2.070 | RAP | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | | |
| 2.071 | ACN | | | | | | 1 | | | | | | | | | | |
| 2.073 | CRI | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| 2.074 | FGPN | 10 | | | 1 | 10 | | | 10 | 10 | 10 | 99 | | 10 | | | |
| 2.075 | ERS | | | | | 1 | | | | | | | | | | | |
| 2.076 | PRI | 1 | | | | | | | 1 | 1 | | | | | | | |
| 2.077 | CFS | | | | | | | | | | | | | | | | |
| 2.078 | PEN | | | | | | | | | | | | 1 | | | | |
| 2.079 | NCR | | | | | | | | 1 | 1 | | 1 | | | | | |
| 2.083 | ULF | 1 | | | | | | | 1 | 1 | | 1 | | | | | |
| 2.086 | SCNA | | | | | | | | | | | 1 | | 1 | 1 | 1 | 1 |
| 2.088 | NOT | 1 | 1 | 1 | 1 | | | | | | | | | | | | |
| 2.089 | MSC | | | | | | | | | | | 99 | | | | | |
| 2.091 | RCD1 | | | | | | | | 1 | 1 | 1 | | | | | | |
| 2.092 | RCD2 | | | | | | | | 1 | 1 | 1 | | | | | | |
| 2.098 | NDR | | | | | | | | | | | | | | | | |
| 2.093 | SLCN | | | | | | | | | | | | | | | | |
| 2.2006 | CSF | | | | | | | | | | | | | | | | |

Formatted: Indent: First line:
0.13", Tabs: 4.5", Centered + 9.25",
Right + Not at 3" + 5.72"

Deleted: 002

Deleted: . . .

Deleted:

Deleted: APRIL 1, 2008

Deleted: ¶

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Table E-1. Summary Field Lists for Latent Transactions (Part 2 of 2)
(Maximum Occurrences of Each Field for Each Logical Record Type)

Formatted Table

Formatted: Font: 10 pt

| Tag | Elem | ULDR | UULD | LRSQ | LSMQ | LRSR | LSMR | ERRA | LSIR |
|-------|------|------|------|------|-------|------|------|------|------|
| 2.001 | LEN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.002 | IDC | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.003 | FFN | | | | | | | | |
| 2.004 | QDD | | | | 1 | | 1 | | |
| 2.005 | RET | | | | | | | | |
| 2.006 | ATN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| 2.007 | SCO | | | | 9 | | 9 | 9 | |
| 2.010 | CIN | 1 | 1 | | ' 200 | | 200 | | 1 |
| 2.011 | CIX | 1 | 1 | | ' 200 | | 200 | | 1 |
| 2.012 | LCN | 1 | 1 | | | | | | |
| 2.013 | LCX | 1 | 1 | | | | | | |
| 2.014 | FBI | | | | | | | 1 | |
| 2.015 | SID | | | | | | | 1 | |
| 2.016 | SOC | | | | | | | | |
| 2.017 | MNU | | | | | | | | |
| 2.018 | NAM | | | | | | | | |
| 2.019 | AKA | | | | | | | | |
| 2.020 | POB | | | | | | | | |
| 2.021 | CTZ | | | | | | | | |
| 2.022 | DOB | | | | | | | | |
| 2.023 | AGR | | | | | | | | |
| 2.024 | SEX | | | | | | | | |
| 2.025 | RAC | | | | | | | | |
| 2.026 | SMT | | | | | | | | |
| 2.027 | HGT | | | | | | | | |

Formatted: Indent: First line: 0.13", Tabs: 4.5", Centered + 9.25", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: . . .

Deleted:

Deleted: APRIL 1, 2008

Deleted: ¶

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Table E-1. Summary Field Lists for Latent Transactions (Part 2 of 2)
(Maximum Occurrences of Each Field for Each Logical Record Type)

Formatted Table

Formatted: Font: 10 pt

| Tag | Elem | ULDR | UULD | LRSQ | LSMQ | LRSR | LSMR | ERRA | LSIR |
|-------|------|------|------|------|------|------|------|------|------|
| 2.028 | HTR | | | | | | | | |
| 2.029 | WGT | | | | | | | | |
| 2.030 | WTR | | | | | | | | |
| 2.031 | EYE | | | | | | | | |
| 2.032 | HAI | | | | | | | | |
| 2.033 | FPC | | | | | | | | |
| 2.034 | PAT | | | | | | | | |
| 2.035 | PPA | | | | | | | | |
| 2.036 | PHT | | | | | | | | |
| 2.037 | RFP | | | | | | | | |
| 2.038 | DPR | | | | | | | | |
| 2.039 | EAD | | | | | | | | |
| 2.040 | OCP | | | | | | | | |
| 2.041 | RES | | | | | | | | |
| 2.042 | MIL | | | | | | | | |
| 2.044 | GEO | | | | | | | | |
| 2.045 | DOA | | | | | | | | |
| 2.046 | DOS | | | | | | | | |
| 2.047 | ASL | | | | | | | | |
| 2.049 | EID | | | | | | | | 1 |
| 2.051 | CSL | | | | | | | | |
| 2.053 | OFC | | | | | | | | |
| 2.054 | SSD | | | | | | | | |
| 2.055 | SLE | | | | | | | | |
| 2.056 | ICO | | | | | | | | |
| 2.059 | SRF | | | | | | | | 1 |

Formatted: Indent: First line: 0.13", Tabs: 4.5", Centered + 9.25", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: . . .

Deleted:

Deleted: APRIL 1, 2008

Deleted: ¶

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

Table E-1. Summary Field Lists for Latent Transactions (Part 2 of 2)
(Maximum Occurrences of Each Field for Each Logical Record Type)

| Tag | Elem | ULDR | UULD | LRSQ | LSMQ | LRSR | LSMR | ERRA | LSIR |
|--------|------|------|------|------|------|------|------|------|------|
| 2.060 | MSG | | 11 | | | | | 11 | |
| 2.061 | CST | | | | | | | | |
| 2.062 | IMT | | | | | | | | |
| 2.063 | PTD | | | | | | | | |
| 2.064 | CAN | | | | | | | | |
| 2.065 | RSR | | | | | 1 | | | |
| 2.067 | IMA | | | | | | | | |
| 2.069 | ETC | | | | | | 200 | | |
| 2.070 | RAP | | | | | | | | |
| 2.071 | ACN | | | | | | | | |
| 2.073 | CRI | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| 2.074 | FGP | | | | | | | | |
| 2.075 | ERS | | | | | | | | |
| 2.076 | PRI | | | | 200 | | 200 | | |
| 2.077 | CFS | | | | 200 | | 200 | | |
| 2.078 | PEN | | | | | | | | |
| 2.079 | NCR | | | | | | | | |
| 2.083 | ULF | | | | | | | | |
| 2.086 | SCNA | 1 | 1 | | 200 | | 200 | | |
| 2.088 | NOT | | | | | | | | |
| 2.089 | MSC | | | | | | | | |
| 2.091 | RCD1 | | | | | | | | |
| 2.092 | RCD2 | | | | | | | | |
| 2.093 | SPCN | | | | | | | | |
| 2.098 | NDR | | | | | | | | |
| 2.2006 | CSF | | | | | | | | |

Formatted Table

Formatted: Font: 10 pt

Formatted: Indent: First line: 0.13", Tabs: 4.5", Centered + 9.25", Right + Not at 3" + 5.72"

Deleted: ¶

Deleted: 002

Deleted: . . .

Deleted:

Deleted: APRIL 1, 2008

Deleted: ¶

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

APPENDIX E REFERENCE NOTES

1. If the originator of this TOT is the FBI, then the field is mandatory.
2. The DOO portion of this field is optional, but should be provided if known.
3. The AOL field for this TOT is optional. If provided, the DOO portion of this field is optional, but should be provided if known.
4. Mandatory whenever comparison fingerprints are of a subject.
5. This field will be returned in the response if subject identification is made.
6. Field is optional unless Ident has been made and subject criminal history was requested in submission.
7. If known, mandatory to enter.
8. If more than one fingerprint image is submitted, this field is mandatory.
9. Either CIN/CIX or SCNA is mandatory if QDD = "C."
10. ASL must be included where submission includes CSL. CSL and ASL must be included where submission includes SLE.
11. SRF for LSIR transactions will contain "IDENT" (I), "Non-IDENT" (N), or "PENDING" (P).

Deleted: 1

This page is intentionally left blank

Deleted: 002

Formatted: Tabs: 3.25", Left + 6.5", Right + Not at 3" + 5.72"

Deleted: APRIL 1, 2008

| IAFIS-DOC-01078-8.1

E-8

XXXXX 99, 9999

APPENDIX F

IAFIS IMAGE QUALITY SPECIFICATIONS

1.0 Scope and Purpose

These specifications apply to: (1) systems that scan and capture fingerprints⁷ in digital, softcopy form, including hardcopy scanners such as tenprint card scanners, and live scan devices, altogether called “fingerprint scanners”; and (2) systems utilizing a printer to print digital fingerprint images to hardcopy called “fingerprint printers.” These specifications provide criteria for ensuring the image quality of fingerprint scanners and printers that input fingerprint images to, or generate fingerprint images from within, the Integrated Automated Fingerprint Identification System (IAFIS).

Digital softcopy images obtained from fingerprint scanners must have sufficient quality to allow the following functions to be performed: (1) conclusive fingerprint comparisons (identification or non-identification decision), (2) fingerprint classification, (3) automatic feature detection, and (4) overall Automated Fingerprint Identification System (AFIS) search reliability. The fingerprint comparison process requires a high-fidelity image. Finer detail, such as pores and incipient ridges, are needed because they can play an important role in the comparison.

The fingerprint examiners in the IAFIS environment will depend upon softcopy-displayed images of scanned fingerprints to make comparisons, but will also need to accept and utilize hardcopy images in certain instances. For example, some contributors may print cards from live scan or card scan systems for submission to the FBI. These hardcopy prints will be obtained from printers that include printing algorithms optimized for fingerprints. The printer’s principal function is to produce life-size prints of digital fingerprints that have met IAFIS format requirements and provide sufficient print quality to support fingerprint comparisons, *i.e.*, support identification or non-identification decisions.

The image quality requirements covered in the following Sections 2 and 3 for fingerprint scanners, Section 4 for fingerprint printers, and Section 5 for fast-track requirements have associated test procedures that are described in detail in [Test Procedures].

These test procedures will be used by the FBI principally for certification of fingerprint systems; they may also be used in acceptance testing and in performance capability demonstrations as an indication of capability to perform. Equipment shall be tested to meet the requirements in normal operating modes, *e.g.*, scanners shall not be tested at slower-than-normal operating speeds in an attempt to meet geometric accuracy specifications. A vendor may recommend alternate testing methods if the test procedures given in this appendix are not applicable or cannot be applied to the particular system under test.

⁷ The term “fingerprint” in this appendix may also include palmprint, whole hand print, or a print from other parts of the human body.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

2.0 Fingerprint Scanner

The fingerprint scanner must be capable of producing images that exhibit good geometric fidelity, sharpness, detail rendition, gray-level uniformity, and gray-scale dynamic range, with low noise characteristics. The images must be true representations of the input fingerprints without creating any significant artifacts, anomalies, false detail, or cosmetic image restoration effects.

The scanner's final output resolution in both sensor detector row and column directions shall be in the range: $(R-0.01R)$ to $(R+0.01R)$ and shall be gray-level quantized to eight bits per pixel (256 gray-levels). The magnitude of "R" is either 500 pixels per inch (ppi) or 1,000 ppi; a scanner may be certified at either one or both of these resolution levels. The scanner's true optical resolution shall be greater than or equal to R.

A scanner intended to scan standard 8.0 by 8.0 inch tenprint cards, *e.g.*, applicant fingerprint card type FD-258 or FD-249, shall be capable of capturing an area of at least 5.0 by 8.0 inches, which captures all 14 printblocks, either each printblock as a separate image or all printblocks together as a single image. Table F-1 gives the preferred capture sizes applicable to both card scan and live scan systems. Scanner capture dimensions should never be less than 90 percent of those given in Table F-1, with the exception that, when scanning fingerprint cards, the card form dimensions take precedence.

Table F-1. Preferred Capture Sizes

| | Preferred Width (inches) | Preferred Height (inches) |
|--|-----------------------------|------------------------------|
| roll finger | 1.6* | 1.5 |
| plain thumb | 1.0 | 2.0 |
| plain 4-fingers (sequence check) | 3.2 | 2.0 |
| plain 4-fingers (identification flat) | 3.2 | 3.0 |
| full palm | 5.5 | 8.0 |
| half palm | 5.5 | 5.5 |
| writer's palm | 1.75 | 5.0 |

* Live scanner must be capable of capturing at least 80% of full roll arc length, where full roll arc length is defined as arc length from nail edge to nail edge.

2.1 Linearity

Requirement:

| IAFIS-DOC-01078-8.1

F-2

XXXXX 99, 9999

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

When measuring a stepped series of uniform target reflectance patches (*e.g.*, step tablet) that substantially cover the scanner's gray range, the average value of each patch shall be within 7.65 gray-levels of a linear, least squares regression line fitted between target reflectance patch values (independent variable) and scanner output gray-levels (dependent variable).

Background:

All targets used in IQS compliance verification are expected to be scanned with the scanner operating in a linear input/output mode. Linearity enables valid comparisons of test measurements with requirements, *e.g.*, a system's spatial frequency response in terms of Modulation Transfer Function is, strictly speaking, a linear systems concept. Linearity also facilitates comparisons between different scanners through the "common ground" concept. In atypical cases, a small amount of smooth, monotonic nonlinearity may be acceptable for the test target scans, *i.e.*, when it is substantially impractical and unrepresentative of operational use, to force linearity on the scanner under test (*e.g.*, some live scan devices). Linearity is not a requirement for the operational or test fingerprint scans, which allows for processing flexibility to overcome inadequate tonal characteristics of fingerprint samples.

2.2 Geometric Accuracy

Requirement (across-bar):

When scanning a multiple, parallel bar target, in both vertical bar and horizontal bar orientations, the absolute value of the difference between the actual distance across parallel target bars and the corresponding distance measured in the image shall not exceed the following values for at least 99.0 percent of the tested cases in each printblock measurement area and in each of the two orthogonal directions.

For 500-ppi scanner:

$$D \leq 0.0007, \quad \text{for } 0.00 < X \leq 0.07$$

$$D \leq 0.01X, \quad \text{for } 0.07 \leq X \leq 1.50$$

for 1,000-ppi scanner:

$$D \leq 0.0005, \text{ for } 0.00 < X \leq 0.07$$

$$D \leq 0.0071X, \quad \text{for } 0.07 \leq X \leq 1.5$$

where:

$$D = |Y - X|$$

X = actual target distance

Y = measured image distance

D, X, Y are in inches.

Requirement (along-bar):

When scanning a multiple, parallel bar target, in both vertical bar and horizontal bar orientations, the maximum difference in the horizontal or vertical direction, respectively, between the locations of any two points within a 1.5-inch segment of a given bar image shall not exceed

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

0.016 inches for at least 99.0 percent of the tested cases in each printblock measurement area and in each of the two orthogonal directions.

Background:

In this Section 2.2, the phrase: *multiple, parallel bar target* refers to a Ronchi target, which consists of an equal-width bar and space square wave pattern at 1.0 cy/mm, with high contrast ratio and fine edge definition. This target is also used to verify compliance with the scanner resolution requirement given in Section 2.0 of this appendix.

Across-bar geometric accuracy is measured across the imaged Ronchi target bars that substantially cover the total image capture area. The 500-ppi requirement corresponds to a positional accuracy of ± 1.0 percent for distances between 0.07 and 1.5 inches and a constant ± 0.0007 inches (1/3 pixel) for distances less than or equal to 0.07 inches. The 1,000-ppi requirement corresponds to a positional accuracy of ± 0.71 percent for distances between 0.07 and 1.5 inches and a constant ± 0.0005 inches (1/2 pixel) for distances less than or equal to 0.07 inches.

This measurement procedure is also used to verify the ppi resolution requirement given in Section 2.0 of this appendix.

Along-bar geometric accuracy is measured along the length of an individual Ronchi target bar in the image. For a given horizontal bar, for example, the maximum difference between bar center locations (in vertical direction), determined from bar locations measured at multiple points along a 1.5" bar segment length, is compared to the maximum allowable difference requirement (analogously for vertical bar). This requirement is to ensure that pincushion or barrel distortion over the primary area of interest, *i.e.*, a single fingerprint, is not too large.

2.3 Spatial Frequency Response

Requirements:

The spatial frequency response shall be measured using a continuous tone sine wave target denoted as Modulation Transfer Function (MTF) measurement unless the scanner cannot obtain adequate tonal response from this target, in which case a bi-tonal bar target shall be used to measure the spatial frequency response, denoted as Contrast Transfer Function (CTF) measurement. When measuring the sine wave MTF, it shall meet or exceed the minimum modulation values given in Table 2-1 in both the detector row and detector column directions and over any region of the scanner's field of view. When measuring the bar CTF, it shall meet or exceed the minimum modulation values defined by equation 2-1 or equation 2-2 (whichever applies) in both the detector row and detector column directions and over any region of the scanner's field of view. CTF values computed from equations 2-1 and 2-2 for nominal test frequencies are given in Table 2-2.

None of the MTF or CTF modulation values measured at specification spatial frequencies shall exceed 1.05.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"
Deleted: 002
Deleted: APRIL 1, 2008

Table F-2. MTF Requirement Using Sine Wave Target

| Frequency (cy/mm) | Minimum Modulation for 500-ppi Scanner | Minimum Modulation for 1,000-ppi Scanner |
|-------------------|--|--|
| 1 | 0.905 | 0.925 |
| 2 | 0.797 | 0.856 |
| 3 | 0.694 | 0.791 |
| 4 | 0.598 | 0.732 |
| 5 | 0.513 | 0.677 |
| 6 | 0.437 | 0.626 |
| 7 | 0.371 | 0.579 |
| 8 | 0.312 | 0.536 |
| 9 | 0.255 | 0.495 |
| 10 | 0.200 | 0.458 |
| 12 | | 0.392 |
| 14 | | 0.336 |
| 16 | | 0.287 |
| 18 | | 0.246 |
| 20 | | 0.210 |

Note: Testing at 7 and 9 cy/mm is not a requirement if these frequency patterns are absent from the sine wave target.

Table F-3. CTF Requirement Using Bar Target (Nominal Test Frequencies)

| Frequency (cy/mm) | Minimum Modulation for 500-ppi Scanner | Minimum Modulation for 1,000-ppi Scanner |
|-------------------|--|--|
| 1.0 | 0.948 | 0.957 |
| 2.0 | 0.869 | 0.904 |
| 3.0 | 0.791 | 0.854 |
| 4.0 | 0.713 | 0.805 |
| 5.0 | 0.636 | 0.760 |
| 6.0 | 0.559 | 0.716 |
| 7.0 | 0.483 | 0.675 |
| 8.0 | 0.408 | 0.636 |
| 9.0 | 0.333 | 0.598 |
| 10.0 | 0.259 | 0.563 |
| 12.0 | | 0.497 |
| 14.0 | | 0.437 |
| 16.0 | | 0.382 |
| 18.0 | | 0.332 |
| 20.0 | | 0.284 |

The output sine wave image or bar target image shall not exhibit any significant amount of aliasing.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"
 Deleted: 002
 Deleted: APRIL 1, 2008

It is not required that the bar target contain the exact frequencies listed in Table 2-2; however, the target does need to cover the listed frequency range and contain bar patterns close to each of the listed frequencies. The following equations are used to obtain the specification CTF modulation values when using bar targets that contain frequencies not listed in Table 2-2.

500-ppi scanner, for $f = 1.0$ to 10.0 cy/mm:

$$CTF = 3.04105E - 04 * f^2 - 7.99095E - 02 * f + 1.02774 \quad (\text{eq.2-1})$$

1,000-ppi scanner, for $f = 1.0$ to 20.0 cy/mm:

$$CTF = -1.85487E - 05 * f^3 + 1.41666E - 03 * f^2 - 5.73701E - 02 * f + 1.01341 \quad (\text{eq.2-2})$$

Background:

For MTF assessment, the single, representative sine wave modulation in each imaged sine wave frequency pattern is determined from the sample modulation values collected from within that pattern. The sample modulation values are computed from the maximum and minimum levels corresponding to the “peak” and adjacent “valley” in each sine wave period. For a sine wave image, these maximum and minimum levels represent the image gray-levels that have been locally averaged in a direction perpendicular to the sinusoidal variation and then mapped through a calibration curve into target reflectance space. Sample image modulation in target reflectance space is then defined as:

$$\text{modulation} = (\text{maximum} - \text{minimum}) / (\text{maximum} + \text{minimum})$$

The calibration curve is the curve of best fit between the image gray-levels of the density patches in the sine wave target and the corresponding target reflectance values. [It is assumed that sine wave target modulations and target density patch values are supplied by the target manufacturer.] The scanner MTF at each frequency is then defined as:

$$MTF = \text{peak image modulation} / \text{target modulation}$$

For CTF assessment, the modulations are determined directly in image space, normalized by the image modulation at zero frequency, instead of using a calibration curve. The scanner CTF at each frequency is then defined as:

$$CTF = \text{peak image modulation} / (\text{zero frequency image modulation})$$

The bar target must contain at least 10 parallel bars at each of the higher spatial frequencies (~50% Nyquist to Nyquist frequency), which helps to ensure capture of optimum scanner – target phasing and aids investigation of potential aliasing. The bar target must also contain a very low frequency component, *i.e.*, a large square, bar, or series of bars whose effective frequency is less than 2.5 percent of the scanner’s final output resolution. This low frequency component is used in normalizing the CTF; it must have the same density (on the target) as the higher frequency target bars.

The upper limit of 1.05 modulation is to discourage image processing that produces excessive edge sharpening, which can add false detail to an image.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

Aliasing on sine wave images or bar images may be investigated by quantitative analysis and from visual observation of the softcopy-displayed image.

2.4 Signal-to-Noise Ratio

Requirement:

The white signal-to-noise ratio and black signal-to-noise ratio shall each be greater than or equal to 125.0 in at least 97.0 percent of respective cases within each printblock measurement area.

Background:

The signal is defined as the difference between the average output gray-levels obtained from scans of a uniform low reflectance and a uniform high reflectance target, measuring the average values over independent 0.25 by 0.25 inch areas within each printblock area. The noise is defined as the standard deviation of the gray-levels in each of these quarter-inch measurement areas. Therefore, for each high reflectance, low reflectance image pair there are two SNR values, one using the high reflectance standard deviation and one using the low reflectance standard deviation. To obtain a true measure of the standard deviation, the scanner is set up such that the white average gray-level is several gray-levels below the system's highest obtainable gray-level and the black average gray-level is several gray-levels above the system's lowest obtainable gray-level.

2.5 Gray-Level Uniformity

Requirement – adjacent row, column uniformity:

At least 99.0 percent of the average gray-levels between every two adjacent quarter-inch-long rows and 99.0 percent between every two adjacent quarter-inch-long columns within each imaged printblock area shall not differ by more than 1.0 gray-levels when scanning a uniform low-reflectance target and shall not differ by more than 2.0 gray-levels when scanning a uniform high-reflectance target.

Requirement – pixel-to-pixel uniformity:

For at least 99.9 percent of all pixels within every independent 0.25 by 0.25 inch area located within each imaged printblock area, no individual pixel's gray-level shall vary from the average by more than 22.0 gray-levels when scanning a uniform high-reflectance target and shall not vary from the average by more than 8.0 gray-levels when scanning a uniform low-reflectance target.

Requirement – small area uniformity:

For every two independent 0.25 by 0.25 inch areas located within each imaged printblock area, the average gray-levels of the two areas shall not differ by more than 12.0 gray-levels when scanning a uniform high-reflectance target and shall not differ by more than 3.0 gray-levels when scanning a uniform low-reflectance target.

Background:

Measurements are made over multiple, independent test areas on a printblock-by-printblock basis. (For a live scanner, the entire capture area is normally considered a single printblock

IAFIS-DOC-01078-8.1

F-7

XXXXX 99, 9999

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

area). To obtain a true measure of the standard deviation, the scanner is set up such that the white average gray-level is several gray-levels below the system's highest obtainable gray-level and the black average gray-level is several gray-levels above the system's lowest obtainable gray-level.

2.6 Fingerprint Image Quality

The scanner shall provide high quality fingerprint images; the quality will be assessed with respect to the following requirements.

Requirement – Fingerprint Gray Range:

At least 80.0 percent of the captured individual fingerprint images shall have a gray-scale dynamic range of at least 200 gray-levels, and at least 99.0 percent shall have a dynamic range of at least 128 gray-levels.

Background:

Card and live scan systems at a booking station have some control over dynamic range on a subject-by-subject or card-by-card basis, *e.g.*, by rolling an inked finger properly or by adjusting gain on a livescanner. However, with central site or file conversion systems where a variety of card types and image qualities are encountered in rapid succession, automated adaptive processing may be necessary. The eight-bits-per-pixel quantization of the gray-scale values for very low contrast fingerprints needs to more optimally represent the reduced gray-scale range of such fingerprints, but without significant saturation. The intent is to avoid excessively low contrast images without adding false detail.

Dynamic range is computed in terms of number of gray-levels present that have signal content, measuring within the fingerprint area and substantially excluding white background and card format lines, boxes, and text.

For card scanners, compliance with these dynamic range requirements will be verified using a statistically stratified sample set of fingerprint cards assembled by the FBI. The test fingerprint card set may include cards with difficult-to-handle properties, *e.g.*, tears, holes, staples, glued-on photos, or lamination, for testing card scanners that have automatic document feeder mechanisms. For live scanners, compliance will be verified with sets of livescans produced by the vendor.

Requirement – Fingerprint Artifacts and Anomalies:

Artifacts or anomalies detected on the fingerprint images that are due to the scanner or image processing shall not significantly adversely impact support to the functions of conclusive fingerprint comparisons (identification or non-identification decision), fingerprint classification, automatic feature detection, or overall Automated Fingerprint Identification System (AFIS) search reliability.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

| IAFIS-DOC-01078-8.1

F-8

XXXXX 99, 9999

Background:

The fingerprint images will be examined to determine the presence of artifacts or anomalies that are due to the scanner or image processing; assessment may include measurements to quantify their degree of severity and significance. Image artifacts or anomalies such as the following non-inclusive list may be investigated.

- jitter noise effects
- sharp truncations in average gray-level between adjacent printblocks
- gaps in the gray-level histograms, *i.e.*, zero pixels in intermediate gray-levels, or clipping to less than 256 possible gray-levels
- imaging detector butt joints
- noise streaks
- card bleed-through
- gray-level saturation

Requirement – Fingerprint Sharpness & Detail Rendition:

The sharpness and detail rendition of the fingerprint images, due to the scanner or image processing, shall be high enough to support the fingerprint functions stated in Section 1, paragraph 2.

Background:

Fingerprint sharpness and detail rendition that is due to the scanner or image processing may be investigated by employing suitable, objective image quality metrics, as well as by visual observation of the softcopy-displayed image.

3.0 Identification Flats

Traditional fingerprint sets contain both rolled and plain fingerprint images. The rolled impressions support the search processing and identification functions and the plain impressions are used primarily for sequence verification. Fingerprinting systems designed for “Identification Flats” civilian background checks capture a single set of plain impressions. This single set of plain impressions must support finger sequence verification, search processing, and identification.

Image quality has historically been a challenge for civil background checks. Some programs require a large number of relatively low-volume capture sites, which makes training difficult. A key goal for identification flats scanners is to reduce the need for training so that inexperienced users consistently capture quality fingerprint images.

The identification flats scanner shall meet all of the requirements stated in Section 2 of this appendix as well as the following requirements.

Requirement – Capture Protocol:

The system shall provide a simple capture protocol.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"
 Deleted: 002
 Deleted: APRIL 1, 2008

Background:

A simple capture protocol supports the inexperienced user’s ability to more consistently capture high quality fingerprints. Identification flats collection systems will be evaluated for their ability to produce a very small rate of failure to enroll in an operational setting. Systems with a minimum capture area of 3.2 inches (width) by 2.9 inches (height) that can capture four fingers simultaneously in an upright position will be considered in compliance with the simple capture protocol requirement. Other capture approaches will require specific testing and documentation.

Formatted: Keep with next, Keep lines together

Formatted: Keep lines together

Requirement – Verifiable Finger Sequence Data:

The method of capturing the fingers shall result in very low probability of error in the finger numbers.

Background:

The fingerprinting system’s capture protocol will be evaluated for its ability to capture verifiable finger sequence data. Systems with a minimum capture area of 3.2 inches (width) by 2.9 inches (height) that capture four fingers simultaneously in an upright position will be considered in compliance with the finger sequence requirements. Other capture approaches will require specific testing and documentation.

4.0 Fingerprint Printer

Requirement:

The fingerprint printer, consisting of a printer and specialized print algorithm, must be capable of producing hardcopy images that exhibit good geometric fidelity, sharpness, detail rendition, gray-level uniformity, and gray-scale dynamic range characteristics, with low noise, no significant creation of false detail, and with the capability to support magnified viewing of the print without breakup of the virtual fingerprint image presented to the eye. This printer is expected to provide high throughput, good repeatability, good print permanency characteristics, and low cost per copy. A typical fingerprint printer is a gray-scale laser printer⁸ with 1,200 black/white dots per inch resolution combined with a printing algorithm that typically includes image contrast and printer gamma/highlight/lowlight adjustments, image rescaling, and an error diffusion model with randomized dot dither printing applied to the rescaled image.

The print system’s principal function is to produce life-size prints of digital fingerprints that have met IAFIS format requirements as specified in EBTS and ANSI/NIST and to provide sufficient print quality to support fingerprint comparisons, *i.e.*, support identification or non-identification decisions. The printer should also have the capability to print gray-scale mug shots and property/evidence photos (not necessarily using a fingerprint printing algorithm), as well as print black & white documents containing text and graphics, onto 8.5 x 11.0 inch paper.

⁸ In this appendix, “laser printer” refers to a type of printer in which a laser beam “draws” an electrostatic image of an input signal onto a drum. Toner (typically dry powder) is then transferred to the charged areas of the drum, which then transfers the toner onto paper, where it is fused by heat, creating a black/white/gray image.

Deleted: 002

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: APRIL 1, 2008

A required printer resolution is 500 ppi, which produces the required life-size print when the input digital fingerprint is 500 ppi or when a 1,000-ppi digital fingerprint is down-scaled to 500 ppi prior to printing. In both cases, all other 500-ppi printer requirements must also be met.

Background:

Verification of the specific performance requirements in Section 4 of this appendix is accomplished by evaluating the printer's output print of an FBI-designated test set of digitized fingerprints and FBI-designated digital test target. Requirements compliance verification is performed by a combination of visual assessments of the test prints (aided by visual instruments) and computer-aided assessments of scanned digital images of the test prints. With respect to those requirements that depend on assessments of print scans for compliance verification, the scan resolution is expected to be twice the required gray-scale print resolution, *e.g.*, a print with 500-ppi resolution is scanned at 1,000 ppi, and the scanner is expected to be setup in a calibrated linear input/output, grayscale reflectance capture mode.

4.1 Spatial Frequency Response

Requirement:

The printer shall provide sufficient spatial frequency response to support visually resolving the required printer resolution in orthogonal directions on the print.

Background:

Resolution verification is performed by printing high-contrast digital bar targets and visually inspecting the print under magnification. (When employing a laser printer with a fingerprint printing algorithm, it is recognized and accepted that the effective resolution may vary in complex image areas such as a fingerprint.)

The resolution limit is a single point on the spatial frequency response curve; the entire curve may be measured by scanning the print of an appropriate target, performing appropriate computer-aided assessment on the scan, and comparing results to a minimally acceptable spatial frequency response curve.

4.2 Gray-levels

Requirement:

At least 16 gray-levels shall be visually distinguishable on the print.

Background:

Visual observation of the print of a digital target containing a step tablet is used to verify the 16-gray-level requirement. A higher number of gray-levels is expected to be distinguishable by appropriate computer-aided assessment of the scanned image of the print.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"
Deleted: 002
Deleted: APRIL 1, 2008

4.3 Dynamic Range

Formatted: Keep with next, Keep lines together

Requirement:

The printer shall have the capability to print an input digital image gray range of at least 150, excluding print black saturation and print white saturation.

Background:

The print of a digital step tablet is scanned, each pixel's output gray-level value is converted to the corresponding print reflectance value, and the average print reflectance value within each step is computed. A plot of step average print reflectance versus input digital step tablet gray-level must result in a gray range of at least 150, excluding any saturation on the low end (print black reflectance) and high end (print white reflectance). (The scanner output gray-level to print reflectance conversion is established by generating the scanner's input/output curve using a calibrated step tablet.)

4.4 Geometric Accuracy and Print Scale

Requirement (across-bar):

When printing a digital bar target containing multiple, parallel bars, the absolute value of the difference between the measured distance across parallel bars on the print and the correct distance on the print shall not exceed the following values for at least 97 percent of the tested cases in each direction (vertical and horizontal).

$$D \leq 0.001, \quad \text{for } 0.00 < X \leq 0.07$$

$$D \leq 0.015X, \quad \text{for } 0.07 < X \leq 1.50$$

where:

$$D = |Y - X|$$

X = correct distance = digital target pixels / required print resolution

Y = measured distance on print

D, X, Y are in inches

Requirement (along-line):

Straight target lines printed parallel to or at a 45-degree angle to the paper or card edges shall be straight on the print with no significant waviness, bow, or "staircasing."

Background:

The across-bar requirement corresponds to a positional accuracy of ± 1.5 percent for distances greater than 0.07 inches and less than or equal to 1.5 inches and a constant ± 0.001 inches for distances less than or equal to 0.07 inches. With a 500 ppi-required print resolution, a digital bar target with a period of 18 pixels is used, which corresponds to a bar frequency of 500 / (25.4*18) cy/mm on the print, when printed life-size. The measured distance on the print can be obtained by scanning the print and applying computer-assisted assessment on the resulting digital image. The requirement takes into account the geometric errors inherent in a good quality scanner. For life-size printing, the print scale error is measured over a distance in the 0.07 to 1.50 inch range.

Deleted: 002

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: APRIL 1, 2008

Print scale error is equal to: (correct distance - measured distance) / correct distance. For life-size printing at 500 ppi, a 1.5 percent allowable error in distance, measured in inches, is equivalent to an allowable print ppi error equal to ± 7.5 ppi.

The along-line requirement can be assessed visually, aided, *e.g.*, by a straight-edge and magnifying lens.

4.5 Noise

Requirement:

For a required printer resolution of 500 ppi, the noise magnitude shall be less than 0.120 at each average print reflectance level when noise magnitude is defined as the standard deviation of print reflectance values within an area on the print corresponding to a constant gray-level on the input digital target. (Print reflectance is measured in fractional units: 0.0 to 1.0 range.)

Background:

A digital step tablet is printed, the print is scanned at 1000 ppi, each pixel's output gray-level value is converted to the corresponding print reflectance value, and the standard deviation of print reflectance values within each step is computed. The scanner output gray-level to print reflectance conversion is established by generating the scanner's input/output curve using a calibrated step tablet.

4.6 Print Polarity and Color

Requirement:

The printed fingerprints shall appear as dark gray-to-black ridges on a light gray-to-white background.

4.7 Print Permanence

Requirement:

The printed fingerprints shall not smear or smudge with normal handling.

4.8 Print Stability

Requirement:

Both the fingerprints and the card stock or paper on which they are printed shall retain their visually neutral (black, white, gray) color over time.

4.9 Hazardous Materials

Requirement:

The prints shall not produce any health hazard as a result of handling. They shall not produce any noxious, annoying, or unpleasant odors when accumulated in large numbers and handled in areas having limited ventilation.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

Background:

Requirements 4.7 (print permanence), 4.8 (print stability), and 4.9 (hazardous materials) are met by standard laser printers.

4.10 Fingerprint Prints

4.10.1 Print Types Requirements

Requirement:

The printer shall have the capability to print a set of individual livescans or previously scanned, individual inked fingerprints, life-size and in their correct printblock locations, onto a standard tenprint fingerprint card (e.g., fingerprint card type FD-258), or print onto blank 8.0 by 8.0 inch card stock, or print onto blank 8.5 x 11.0 inch plain paper. In the case of printing fingerprints onto blank card stock or blank paper, the printer shall also print the printblock boundary lines and labeling that normally appears on a standard tenprint card.

The printer shall have the capability to print a previously scanned tenprint card in its entirety and life-size onto blank 8.0 x 8.0 inch card stock or onto blank 8.5 by 11.0 inch plain paper.

The printer shall have the capability to print a single fingerprint magnified up to five times beyond life-size onto 8.5 by 11.0 inch plain paper.

When printing in tenprint card format onto tenprint card stock, blank card stock, or plain paper, the printer shall also have the capability to print labels, bar chart, step tablet, and finger condition codes, all on the same print with the fingerprints. Figure 4-1 illustrates the printing of this auxiliary information. Sections 4.10.2 through 4.10.5 of this appendix give the detailed requirements.

4.10.2 Labels

Requirement:

When printing fingerprints in tenprint card format, the printing process shall have the capability to print a character string of scanner information within the left four finger plain impression printblock and a character string of printer information within the right four finger plain impression printblock. Each character string shall be printed along the top inside edge of the respective printblock in a type font and size that is large enough for human readability without the aid of a magnifier and small enough so as not to unduly impinge on fingerprint structure.

The scanner information string shall include the scanner make, model number, and serial number, if available, and/or similar information on the scanner system. The printer information string shall include the printer make, model number, and serial number, if available, and shall include similar information on the fingerprint printing algorithm, if available, and shall include the date and time of printing.

The scanner and printer character strings shall be printed without a background, border, or any other type of added surround.

| |
|--|
| Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72" |
| Deleted: 002 |
| Deleted: APRIL 1, 2008 |

Background:

Information for the scanner string can typically be obtained from the EBTS Type-2 record field identified as “IMA 2.067 – Image Capture Equipment,” which includes scanner system make, model number, and serial number.

A printer is certified as a combination of a specific brand/model printer and fingerprint printing algorithm; the latter may also have a name or version designation.

Character string printing: a solid background (*e.g.*, white) to the character string is unacceptable because it would unnecessarily obliterate some parts of fingerprints on some images. Individual characters with no background that overprint the fingerprint would obliterate a much smaller proportion of the fingerprint and are acceptable. Printing the character strings in an open space created by offsetting print_blocks 6-10 from print_blocks 11-14 is unacceptable because it changes the dimensions of the standard tenprint card format, and it cannot adequately accommodate fingerprints that stray across print_block boundaries.

Proper text size typically would correspond to a height of a numeral or upper case letter being in the range: 0.067 inches to 0.095 inches.

4.10.3 Bar Chart

Requirement:

When printing fingerprints in tenprint card format, the printing process shall have the capability to print a bar chart consisting of equally spaced horizontal black bars and vertical black bars printed at the required printer resolution.

The bar chart shall be positioned at the top edge within the right thumb plain impression print block and shall have a maximum width of 0.8 inches and a maximum height of 0.125 inches. The bar chart shall contain at least 10 parallel bars in each direction, vertical and horizontal, with a bar length of at least 0.0625 inches (not necessarily the same number of bars, or same bar length, in the two directions).

An optional, uniform mid-grey-level patch may be included between the horizontal and vertical bar components.

The bar chart shall be printed without a background, border, or any other type of added surround.

Background:

For a 500-ppi printer requirement, the limiting frequency is 250 cycles per inch, which implies that 250 black bars per inch are printed, where the 0.002-inch width of an individual bar is equal to the width of the white space between two bars.

If a mid-gray patch between the vertical and horizontal bar patterns appears to have the same overall gray-level on the print as the two bar patterns, then this may indicate that the printer

| |
|--|
| Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72" |
| Deleted: 002 |
| Deleted: APRIL 1, 2008 |

gamma/highlight/lowlight settings are optimum and/or that the printer toner supply was adequate for printing.

4.10.4 Step Tablet

Requirement:

When printing fingerprints in tenprint card format, the printing process shall have the capability to print a step tablet, consisting of two adjacent horizontal bands, each band having 16 gray-levels. The top band shall progressively darken from left to right and the bottom band shall progressively darken from right to left. The 16 digital input gray-levels corresponding to one band shall be identically the same as for the other band, and both bands shall substantially cover the total gray-level range. This step tablet shall be positioned at the top edge within the left thumb plain impression print block and shall have a total width between 0.5 inches and 0.8 inches and a total height between 0.0625 inches and 0.125 inches.

The step tablet shall be printed without a background, border, or any other type of surround.

Background:

If the top band and bottom band appear “balanced” on the print, *i.e.*, the same mid-gray level appears in the middle of both the top and bottom bands, then this may indicate that the printer gamma/highlight/lowlight settings are optimum.

4.10.5 Finger Condition Codes

Requirement:

When printing fingerprints in tenprint card format, the printing process shall have the capability to notate the presence of an abnormal finger condition in the appropriate printed fingerprint block for those cases where the EBTS Type-2 record field identified as “AMP” (amputated or bandaged) is available and/or for those cases where similar information is available from other sources, such as a state system (possibly with other notation codes).

4.10.6 Fingerprint Quality

Requirement:

The printer shall produce sufficient print quality to allow usable viewing of life-size fingerprint prints under magnification to support fingerprint comparisons, *i.e.*, identification or non-identification decisions. The print image shall maintain its sharpness and detail rendition structure up to at least 4X magnification to the extent that ridges and ridge joints, bifurcations, and terminations that exist in the input digital image to the printer can be substantially discerned by the human observer on the output print without being “lost in the noise.” In addition, the printing process shall not create significant false detail, *e.g.*, it shall not create ridges where none existed in the input digital image.

Background:

Assessment of the requirement is performed by visual inspection of the print augmented by appropriate quantitative analysis of the scanned print.

IAFIS-DOC-01078-8.1

F-16


XXXXX 99, 9999

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

Figure 4-1. Auxiliary Information Printed in Tenprint Card Format Print (Example Text)

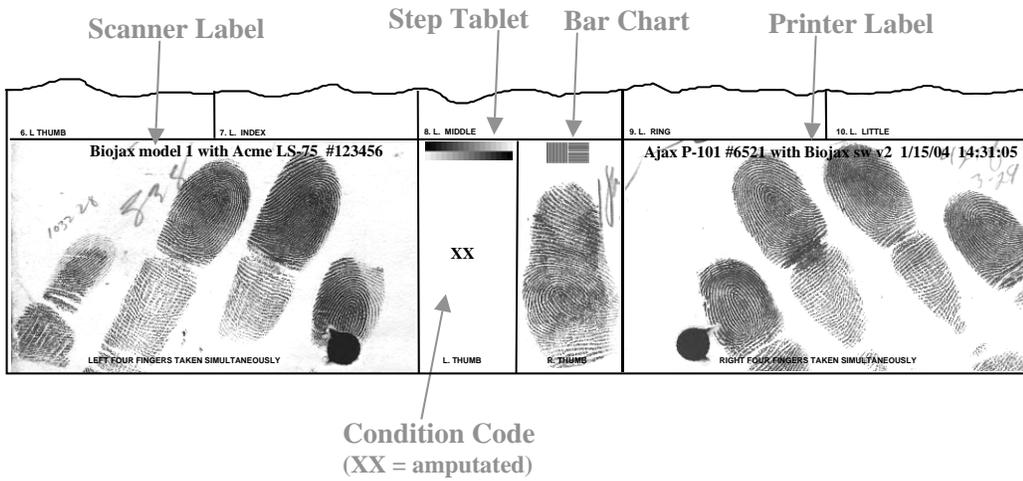

5 Fast-Track Certification

First, to review, full certification testing is required when:

- An uncertified livescan device is presented together with suitable SW such that the combination prospectively meets all IQS requirements.
- A hardcopy scanner or printer (typically a COTS product) is presented together with suitable SW such that the combination prospectively meets all IQS requirements. (The specific SW may be sold separately from the COTS HW, but only the specific HW/SW combination is certified.)
- Substantive modifications are made to an already-certified device. For example, the sensor or optics are changed, the capture area is expanded, the signal processing is substantively changed, or a 500 ppi-certified device is extended for operation at 1000 ppi.

Fast track certification testing is sufficient when:

- A vendor adds “value” to an already certified device by, for example, integrating additional SW and/or HW and repackaging the combination to create a VAR label system. However, if there is a reasonable expectation that the added SW, HW, or repackaging will affect the image quality performance of the original certified device, then full certification testing would be required.

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

- A vendor makes relatively minor modifications to a previously certified device. For example, a membrane is added to (or deleted from) a certified livescanner, an automatic document feeder is added to a certified manual-feed cardscanner, or a 1000 ppi-certified scanner is operated at 500 ppi using the same optics, sensor, and illumination.

Table 5-1 presents the test data requirements for some common fast track certification scenarios; for test requirements for other scenarios, contact the FBI. In addition to the test data, the vendor seeking fast track certification must provide a written statement to the FBI (letter or e-mail) affirming that the previously certified fingerprint device has not been changed with respect to device functions, hardware, firmware, or software that could reasonably be expected to affect image quality performance.* Specific to a scanner, the optics and optical layout, sensor, illumination, image capture electronics, and signal processing have not been changed and the maximum capture area has not been increased.

* Except for inherent image quality changes in specific situations, *e.g.*, when recertifying a 1000 ppi scanner at 500 ppi.

| IAFIS-DOC-01078-8.1

F-18

XXXXX 99, 9999

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

Table F-5. Fast Track Certification Procedures (Common Scenarios)

| Fast Track Certification | Type | Test Data to be Provided to FBI | Requirements Compliance |
|---|--|---|---|
| Livescanner | Vendor A incorporates vendor B's certified device into vendor A's value-added system. Vendor adds (or deletes) platen membrane to certified device. | Livescans from 5 subjects (10 rolls & 4 plains, each subject) Sinewave or bar target scans (target supplied by vendor) and livescans from 5 subjects (10 rolls & 4 plains, each subject) | Section 2.6 Sections 2.1, 2.3, 2.6 |
| Cardscanner | Vendor A incorporates vendor B's certified device into vendor A's value-added system. | Ten 10-print card scans (cards supplied by FBI) | Section 2.6 |
| Cardscanner with Automatic Document Feeder (ADF) | Vendor recertifies manual card scanner for use with ADF. | 100 10-print card scans (cards supplied by FBI) | Section 2.6 |
| Printer | Vendor A incorporates vendor B's certified device into vendor A's value-added system. | Print of printer test target (target supplied by FBI) | all subsections under Section 4.0 pertaining to digital test target |
| 1000 ppi fingerprint scanner as 500 ppi fingerprint scanner | Vendor recertifies its own fingerprint scanner in alternate operating mode | Cardscanner: Sinewave target scans (target supplied by vendor) and ten 10-print card scans (cards supplied by FBI) Livescanner: Sinewave or bar target scans (target supplied by vendor) and livescans from 5 subjects (10 rolls & 4 plains, each subject) | Sections 2.1, 2.3, 2.6 |

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"
 Deleted: 002
 Deleted: APRIL 1, 2008

No certification testing is necessary when:

- The original recipient of a certification wishes to change the model name and there are no other changes to the certified product.
- The original recipient of a certification wishes to repackage the device if there is a reasonable expectation that the repackaging will not affect the image quality performance of the device. All device HW/SW components that may affect image quality performance must remain the same as they were when originally certified. For example, repackaging a device into a ruggedized cabinet or repackaging a floor-standing device as a desktop device by separating out the host computer would not necessarily require further testing, but changing the optical path or optical train of elements to accommodate the repackaging would normally require retesting.
- A reseller of a certified device wishes to sell the device under its own label or under the original label. The certified device must remain intact, unmodified, and as a stand-alone product with no added HW/SW. If relabeled by reseller, the certification is only valid when that label does in fact contain the originally certified device, *i.e.*, no blanket certification for rebrands.
- An end user receives a certified device to be used “as is” without modification (an end-user does not need its own certification).

Definition of Terms:

HW – HardWare, which may include firmware

SW –SoftWare, which may include firmware

COTS – Commercial-Off-The-Shelf product

Vendor – generic term to include Original Equipment Manufacturer (OEM), reseller, Value-Added Reseller (VAR), product assembler, systems integrator, and similar.

Full IQS Certification – a complete set of test data covering all IQS requirements is submitted.

Fast Track IQS Certification - a partial set of test data covering defined IQS requirements is submitted.

| IAFIS-DOC-01078-8.1

F-20

XXXXX 99, 9999

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

APPENDIX F REFERENCES

[ANSI/NIST] – National Institute of Standards and Technology’s *Data Format for the Interchange of Fingerprint, Facial, & Scar Mark & Tattoo (SMT) Information*, ANSI/NIST-ITL 1-2007, NIST Special Publication 500-245.

[EFTS] – Federal Bureau of Investigation’s *Electronic Fingerprint Transmission Specification*, FBI-CJIS-RS-0010 (V7.1), dated May 5, 2005

[TestProcedures] – Federal Bureau of Investigation’s *Test Procedures for Verifying IAFIS Image Quality Requirements for Fingerprint Scanners and Printers*, FBI-CJIS-TD-xxxx, dated xxx.

| IAFIS-DOC-01078-8.1

F-21

XXXXX 99, 9999

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 5.72"
Deleted: 002
Deleted: APRIL 1, 2008

APPENDIX G

RESERVED

| IAFIS-DOC-01078-8.1

XXXX 99, 9999

Formatted: Tabs: 6.38", Right +
Not at 4.63" + 5.72"

Deleted: 002

Deleted: APRIL 1, 2008

APPENDIX H

DESCRIPTORS AND FIELD EDIT SPECIFICATIONS FOR TYPE-7 LOGICAL RECORDS

Table H-1 summarizes the content of each of the fields in the Type-7 record. However, the byte counts do not account for any separator characters.

FGP - Finger Position. This mandatory, fixed-length field shall occupy the 7th through 12th bytes of a Type-7 record. It shall contain possible finger positions beginning with the least-most byte of the field (byte seven of the record). The decimal code number for the known or most probable finger position shall be taken from Table 6 “Finger Position code & maximum size” of the standard “Data Format for the Interchange of Fingerprint, Facial & Scar Mark & Tattoo (SMT) Information,” ANSI/NIST-ITL 1-2007. The number shall be entered as a binary number, right justified, and left zero filled within the eight-bit byte. Up to five additional finger positions may be referenced by entering the alternate finger positions in the remaining five bytes using the same format. If fewer than five finger position references are to be used, the unused bytes shall be filled with the binary equivalent of “255.” The code “0” (for unknown finger) shall be used to reference every finger position from one through ten.

CGA – Grayscale Compression Algorithm. This mandatory, one-byte field shall occupy the 18th byte of a Type-7 record. It shall be used to specify the type of grayscale compression algorithm used (if any). A binary “0” denotes no compression. Otherwise, the content of this byte shall be a binary representation for the number allocated to the particular compression technique used by the interchange parties. The FBI maintains a registry relating these numbers to the compression algorithms.

HLL - Horizontal Line Length. This mandatory, two-byte field shall occupy the 14th and 15th bytes of the Type-7 record. It shall be used to specify the number of pixels contained on a single horizontal line of the transmitted image.

IDC – Image Designation Character. This mandatory, one-byte binary field shall be used to identify the image data contained in this record. The IDC contained in this field shall be a binary representation of the IDC found in the file content field of the Type-1 record.

IMG – Image Data. This binary field shall contain all of the high-resolution grayscale image data. Each pixel of the uncompressed image shall be quantized to eight bits (256 gray-levels) contained in a single byte. If compression is used, the pixel data shall be compressed in accordance with the compression technique specified in the CGA field. This completes the high-resolution image description for a single image.

IMP – Impression Type. This mandatory one-byte field shall occupy the sixth byte of a Type-7 record. The code selected from Table 11 “Finger impression type” in the ANSI/NIST standard referenced above describes the manner by which the fingerprint image information was obtained.

Deleted: 002

Formatted: Position: Horizontal:
4.13", Relative to: Page, Vertical:
-0.04", Relative to: Paragraph

Formatted: Tabs: 6.5", Right + Not
at 5.72"

Deleted: APRIL 1, 200

ISR – Image Scanning Resolution. This mandatory, one-byte field shall occupy the 13th byte of a Type-7 record. It shall contain a binary value of “0” if the minimum scanning resolution is used and a “1” if the native scanning resolution is used.

LEN – Logical Record Length. This mandatory, four-byte binary field shall contain the length of the logical record specifying the total number of bytes, including every byte of all the fields contained in the record.

VLL – Vertical Line Length. This mandatory, two-byte field shall occupy the 16th and 17th bytes of the Type-7 record. It shall be used to specify the number of horizontal lines contained in the transmitted image.

Deleted: 002

Formatted: Position: Horizontal: 4.13", Relative to: Page, Vertical: -0.04", Relative to: Paragraph

Formatted: Tabs: 6.5", Right + Not at 5.72"

Deleted: APRIL 1, 200

APPENDIX I

SUMMARY LOGICAL RECORD LAYOUTS FOR TYPE-2 BIOMETRIC INFORMATION RETRIEVAL

1.0 Introduction

Appendix I presents the summary of the Type-2 logical record layouts for Biometric Information transactions. Table I-1 has been replaced by a summarization representation of these transactions. For detailed specifications of individual fields of these record sets, see Appendix C.

2.0 Interpretation of the Table

The column headers at the top of the page select a particular transaction. The row headers in the left margin give the tag number and ID for each field. The cell at the intersection of any given row and column gives summary information about the use of that field (row) in that transaction (column). If that cell is blank, the field is not used in that record. Otherwise, the number at the right in the cell gives the maximum number of occurrences of that field for that record. If the cell is shaded, then the field's inclusion is optional for that record; unshaded cells indicate mandatory inclusion. The diagonal pattern represents future initiatives, field tags, and type of transactions. In all cases, the minimum number of occurrences for a mandatory field is one, and zero for an optional field.

Deleted: Table I-1 summarizes the content of each of the fields in the image-related transactions. However, the byte counts do not account for any separator characters.

Deleted: I-24
Deleted:
Formatted: Tabs: 6.5", Right + Not at 5.72"
Deleted: 002
Deleted: APRIL 1, 2008

Table I-1. Summary Field Lists for Subject Photo and Fingerprint Request Transactions

(Maximum Occurrences of each Element for each Logical Record Type)

| Tag | Elem | CPR | CPD | ERRI | FIS | FISR | IRQ | IRR | ISR | PDR | PRR |
|-------|------|-----|-----|------|-----|------|-------|-----|-------|-----|-----|
| 2.001 | LEN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.002 | IDC | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.003 | FFN | | | | | | | | | | |
| 2.004 | QDD | | | | | | | | | | |
| 2.005 | RET | | | | | | | | | | |
| 2.006 | ATN | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2.007 | SCO | 9 | 9 | 9 | 9 | 9 | 9 | 9 | 9 | 9 | 9 |
| 2.010 | CIN | | | | | | | | | | |
| 2.011 | CIX | | | | | | | | | | |
| 2.012 | LCN | | | | | | | | | | |
| 2.013 | LCX | | | | | | | | | | |
| 2.014 | FBI | 1 | 1 | 1 | 1 | 1 | 1,000 | 1 | 1,000 | 1 | 1 |
| 2.015 | SID | | | 1 | 1 | 1 | | 1 | 1,000 | | |
| 2.016 | SOC | | | | | | | | | | |
| 2.017 | MNU | | | | | | | | | | |
| 2.018 | NAM | | | | 1 | 1 | | 1 | | | |
| 2.019 | AKA | | | | | | | | | | |
| 2.020 | POB | | | | | | | | | | |
| 2.021 | CTZ | | | | | | | | | | |
| 2.022 | DOB | | | | | | | | | | |
| 2.023 | AGR | | | | | | | | | | |
| 2.024 | SEX | | | | | | | | | | |
| 2.025 | RAC | | | | | | | | | | |
| 2.026 | SMT | | | | | | | | | | |
| 2.027 | HGT | | | | | | | | | | |
| 2.028 | HTR | | | | | | | | | | |
| 2.029 | WGT | | | | | | | | | | |
| 2.030 | WTR | | | | | | | | | | |
| 2.031 | EYE | | | | | | | | | | |
| 2.032 | HAI | | | | | | | | | | |
| 2.033 | FPC | | | | | | | | | | |
| 2.034 | PAT | | | | | | | | | | |
| 2.035 | PPA | | | | 1 | | | 1 | | | |
| 2.036 | PHT | | | | | | | 1 | | | |
| 2.037 | RFP | | | | | | | | | | |
| 2.038 | DPR | | | | 1 | | | | | | |

- Deleted: I-2¶
- Formatted: Indent: Left: 0.13"
- Formatted: Tabs: 6.5", Right + Not at 5.72"
- Formatted: Indent: First line: 0.13", Tabs: 6.38", Right + Not at 5.72"
- Deleted: 002
- Deleted:
- Deleted: APRIL 1, 2008

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGI vendor)

IAFIS-DOC-01078-8.1

I-2

XXXXX 99, 9999

Table I-1. Summary Field Lists for Subject Photo and Fingerprint Request Transactions

(Maximum Occurrences of each Element for each Logical Record Type)

| Tag | Elem | CPR | CPD | ERRI | FIS | FISR | IRQ | IRR | ISR | PDR | PRR |
|-------|------|-----|-----|------|-----|------|-----|-----|-------|-----|-----|
| 2.039 | EAD | | | | | | | | | | |
| 2.040 | OCP | | | | | | | | | | |
| 2.041 | RES | | | | | | | | | | |
| 2.042 | MIL | | | | | | | | | | |
| 2.044 | GEO | | | | | | | | | | |
| 2.045 | DOA | 1 | 1 | | | | | | | 1 | 1 |
| 2.046 | DOS | 1 | 1 | | | | | | | 1 | 1 |
| 2.047 | ASL | | | | | | | | | | |
| 2.049 | EID | | | | | | | | | | |
| 2.051 | CSL | | | | | | | | | | |
| 2.053 | OFC | | | | | | | | | | |
| 2.054 | SSD | | | | | | | | | | |
| 2.055 | SLE | | | | | | | | | | |
| 2.056 | ICO | | | | | | | | | | |
| 2.057 | FNR | | | | | | 13 | | | | |
| 2.058 | ITD | | | | | | | | | | |
| 2.059 | SRF | | | | | | | | | | |
| 2.060 | MSG | | | 11 | | | | | | | |
| 2.061 | CST | | | | | | | | 1,000 | | |
| 2.062 | IMT | | | | | | | | | | |
| 2.063 | PTD | | | | | | | | | | |
| 2.064 | CAN | | | | | | | | | | |
| 2.065 | RSR | | | | | | | | | | |
| 2.067 | IMA | | | | | | | | | | |
| 2.069 | ETC | | | | | | | | | | |
| 2.070 | RAP | | | | | | | | | | |
| 2.071 | ACN | | | | | | | | | | |
| 2.072 | FIU | | | | | 13 | | | | | |
| 2.073 | CRI | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| 2.074 | FGPN | | | | | | | | | | |
| 2.075 | ERS | | | | | | | | | | |
| 2.076 | PRI | | | | | | | | | | |
| 2.077 | CFS | | | | | | | | | | |
| 2.078 | PEN | | | | | | | | | | |
| 2.079 | NCR | | | | | | | | | | |
| 2.080 | EXP | | | | | | | | | 1 | 1 |

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGL vendor)

- Deleted: I-2¶
- Formatted: Indent: Left: 0.13"
- Formatted: Tabs: 6.5", Right + Not at 5.72"
- Formatted: Indent: First line: 0.13", Tabs: 6.38", Right + Not at 5.72"
- Deleted: 002
- Deleted:
- Deleted: APRIL 1, 2008

Table I-1. Summary Field Lists for Subject Photo and Fingerprint Request Transactions
(Maximum Occurrences of each Element for each Logical Record Type)

| Tag | Elem | CPR | CPD | ERRI | FIS | FISR | IRQ | IRR | ISR | PDR | PRR |
|--------|------|-----|-----|------|-----|------|-----|-----|-----|-----|-----|
| 2.081 | UCN | | | | | | | | | | |
| 2.082 | REC | | | | | | | | | 1 | 1 |
| 2.083 | ULF | | | | | | | | | | |
| 2.084 | AMP | | | | 9 | | | 9 | | | |
| 2.086 | SCNA | | | | | | 1 | | | | |
| 2.088 | NOT | | | | | | | | | | |
| 2.089 | MSC | | | | | | | | | | |
| 2.091 | RCD1 | | | | | | | | | | |
| 2.092 | RCD2 | | | | | | | | | | |
| 2.095 | RFR | | | | | | 1 | | | | |
| 2.098 | NDR | | | | | | | | | | |
| 2.2009 | PTY | | | | | | | | | | |
| 2.2010 | NIR | | | | | | | | | | |
| 2.2012 | IIR | | | | | | | | | | |

Note: Shaded cells represent optional elements; Unshaded cells represent mandatory elements; Blank cells indicate the element is not used; Diagonal pattern represents FUTURE initiatives (Specific requirements for future TOTs will be developed in concert with the NGL vendor)

- Deleted: I-2¶
- Formatted: Indent: Left: 0.13"
- Formatted: Tabs: 6.5", Right + Not at 5.72"
- Formatted: Indent: First line: 0.13", Tabs: 6.38", Right + Not at 5.72"
- Deleted: 002
- Deleted:
- Deleted: APRIL 1, 2008

APPENDIX J

DESCRIPTORS AND FIELD EDIT SPECIFICATIONS FOR TYPE-9 LOGICAL RECORDS

Table J-1 and J-2 summarize the content of each of the fields in the Type-9 tenprint and latent record types. However, the byte counts do not account for any separator characters.

AFV 9.013 – AFIS Feature Vector. This field is a bit-packed field on the minutiae, the nearest neighbors, pattern class, and ridge counts. Its presence in the Type-9 record is allowed by including a “U” in the tagged field 9.004. It possesses sufficient features data to replace the rest of the Type-9 native mode record.

APC 9.017 – AFIS/FBI Pattern Classification. This field contains one to three subfields separated by the RS separator with each subfield composed of three information items separated by the U separator character. Each subfield reports a possible basic pattern class (APAT) and the ridge counts (RCN1, RCN2) defining its subpattern class. The AFIS/FBI automatic classifier recognizes only four basic pattern classes: arch (AU), left slant loop (LS), right slant loop (RS), and whorl (WU). It further subdivides the basic pattern classes of loops and whorls according to the count of ridges crossed or touched along a straight line joining the core(s) to the delta(s). The count is one more than the number of intervening ridges. For latents, the latent examiner is expected to make a best estimate as opposed to a range. AFIS/FBI treats all indicated pattern classes equally (i.e., no significance given to the order of the possible classes provided). AFIS/FBI will apply a suitable tolerance to the specified ridge count for search space penetration.

The tagged field accommodates a primary pattern and up to two reference patterns in the one-to-three subfields. The first information item of a subfield contains the two-character symbol for the pattern being designated. The second and third information items contain the appropriate subpattern class ridge count between the core(s) and the delta(s). A zero (0) should be entered if a ridge count is not appropriate; a thirty-one (31) if it was appropriate but not counted or indeterminate. Both information fields are zero for an arch, the second information item in a subfield should be zero if the pattern for the subfield is a loop, and neither information item should be zero for a whorl. If a whorl is indicated in pattern classification, the second information item (RCN1) of a subfield contains the ridge count from the left delta to the downward opening core, and the third information item (RCN2) contains the ridge count from the right delta to the upward opening core. This implies that a central pocket whorl will have both a downward and an upward opening (directed) core generally aligned along the major axis of the innermost ellipse. If the automatic or manual classifier indicates all four basic patterns are possible, then the fingerprint should be designated as “fully referenced” by providing only one subfield with the first information item “UC”; the second and third information items should both be “31.” If a particular fingerprint was not characterized for a tenprint native mode search request, no Type-9 logical record should be submitted for that finger position, and the classification code for the missing finger must be placed in the Type-2 pattern class field.

Deleted: ¶
Section Break (Next Page)
This page is intentionally left blank.
Section Break (Next Page)
Deleted: <
Deleted: RS>
Deleted: <
Deleted: US>

Deleted: ¶
Deleted: 002
Formatted: Tabs: 6.5", Right + Not at 5" + 6"
Deleted: APRIL 1, 2008

| Description | First Information Item | Second Information Item | Third Information Item |
|-----------------------------|------------------------|-------------------------|------------------------|
| Arch (type not designated) | AU | 0 | 0 |
| Left slant loop | LS | 1 – 31 | 0 |
| Right slant loop | RS | 1 – 31 | 0 |
| Whorl (type not designated) | WU | 1 – 31 | 1 - 31 |
| Complete scar | SR | 0 | 0 |
| Amputation | XX | 0 | 0 |
| Unable to classify | UC | 0 or 31 | 0 or 31 |

CHQ 9.024 – Characterization Quality. This is a single information item field. Within AFIS/FBI, the principal quality parameter is the “Equivalent Number of Minutiae.” The distribution of the parameter over thousands of fingerprints approximates a Gaussian distribution with a mean of about 50 and a standard deviation of about 12. The equivalent number of minutiae is calculated as the sum of the weighted normalized quality with the weighting being the number of qualified neighbors for the minutiae divided by the maximum number of neighbors (eight). The normalized minutiae quality ranges from unity (best) to zero (worst). A qualified neighbor would be another minutiae with a reliable separating ridge count (less than 14) and within a reliable distance (not more than 1/5 inch).

CLQ 9.025 – Classifier Quality. This is a single information item field of seven characters representing a positive real number between one (1.0000) and 99 (99.9999) indicating the quality or confidence of the automatic classification. The presence of the information item may reduce the AFIS/FBI processing load, but its absence will not degrade AFIS/FBI performance. A value of 1.0000 indicates best possible quality or confidence; increasing values indicate progressively worse quality or confidence. The information item format shall be XX.YYYY in which XX represents the integer portion and YYYY the fractional portion to four decimal places with a decimal point (period) between.

COF 9.019 – Coordinate Offsets. This field allows the recording of translation, rotation, and image cropping employed in the characterization process to allow the examiner or an analyst to overlay onto the original or intermediate image the features reported in this record. The field contains five eight-character information items each separated by the U separator. For AFIS/FBI, the units are in original image pixels and degrees using standard image processing coordinates; that is, (0,0) origin at the upper left, column index increasing from left to right, and row index increasing from top to bottom. The column and row coordinate indexes (XYP) shall be coded as a single eight-digit integer number composed of a four-digit column coordinate (X) connected to a four-digit row coordinate (Y) using a format of XXXXYYYY. A minus sign is permitted in the leftmost digit of a four-digit group. The first information item contains the offset to the upper left corner of a non-rotated sub-image used subsequently in image processing. The second

Deleted: <
Deleted: US>

Deleted: 002
Formatted: Tabs: 6.5", Right + Not at 5" + 6"
Deleted: APRIL 1, 2008

information item contains the coordinates of the center of rotation within the sub-image about which the sub-image is rotated. The third information item contains the clockwise rotation angle (THET) in ten-thousandths of a degree resolution (e.g., 072.2342) including the decimal point. The fourth information item contains the coordinates of the center of rotation in the rotated sub-image after the sub-image has been translated to eliminate negative column and row indexes. The fifth information item contains the upper-left-corner column and row offsets to a cropped sub-image taken from the rotated image once adjusted to eliminate negative coordinate values. Unused information items may be empty, but the R separators must be included.

Deleted: <
Deleted: US>

CRA 9.021 – Core(s) Attribute. This field is for cores that can be perceived in the fingerprint (both tenprint and latent). If there is no core perceived in the fingerprint image, the tagged field should be omitted. This field contains up to two subfields (one subfield for each core) separated by the R separator. Each subfield contains three information items separated by the U separator representing the attributes of each core.

Deleted: <
Deleted: RS>
Deleted: <
Deleted: US>

The first information item of a subfield contains the X and Y coordinate position of the core (XYM). The position shall be established either automatically or manually according to the definitions presented in The Science of Fingerprints. The X and Y values shall be coded as a single eight-digit integer number composed of the four-digit X coordinate (column) followed by the four-digit Y coordinate (row) using a format of XXXXYYYY. The X coordinate and Y coordinate are in units of 10 micrometers with the origin at the upper left. Core positions shall be in the same coordinate system as the minutiae. The second information item of a subfield is of three-digit size and contains the direction of the core in integer degrees (DID). The direction is that of the core opening through the center of curvature for the innermost recurve at maximum curvature. The direction angle is positive counterclockwise from the reference horizontal to the right. Direction angles shall be reported between “001” and “360” degrees only. The value “000” shall be reserved for “direction not provided” while “360” shall be equivalent to zero degrees. The third information item of a subfield is of four-digit size representing the radius of position uncertainty (PUM) in the manual or automatic placement of the core in integer units of 10 micrometers.

CRP 9.008 – Core Position. This eight-character field shall contain the X and Y coordinate position of the core. The X and Y values shall be coded as a single eight-digit integer number composed of the four-digit X coordinate followed by the four-digit Y coordinate using a format of XXXXYYYY.

DLA 9.022 – Delta(s) Attributes. This field is for deltas that can be perceived in the fingerprint for both AFIS/FBI latent and tenprint characterizations. If there is no delta perceived in the fingerprint image, the tagged field should be omitted. This field contains up to two subfields (one subfield for each delta) separated by the R separator. Each subfield contains five information items separated by the U separator representing the attributes of each delta.

Deleted: <
Deleted: RS>
Deleted: <
Deleted: US>
Deleted: 002
Formatted: Tabs: 6.5", Right + Not at 5" + 6"
Deleted: APRIL 1, 2008

The first information item of a subfield consists of eight characters and contains the X and Y coordinate position (XYM) of the delta(s). The position shall be established either automatically or manually according to the definitions presented in The Science of Fingerprints. The X and Y values shall be coded as a single eight-digit integer number composed of the

four-digit X coordinate (column) followed by the four-digit Y coordinate (row) using a format of XXXXYYYY. The X coordinate and Y coordinate are in units of 10 micrometers with the origin at the upper left. Delta positions shall be in the same coordinate system as the minutiae. The next three information items of a subfield shall be of three-digit size each to contain the three directions of ridge flow (DID) outward from the delta in integer degrees. The second information item of a subfield is the direction of the ridge flow upward from the delta. The third information item of a subfield shall be the direction of ridge flow outward from the delta and to the left. The fourth information item shall be the direction of the ridge flow outward from the delta to the right. The direction angles are positive counterclockwise from the reference horizontal to the right. Direction angles shall be reported between “001” and “360” degrees only. The value “000” shall be reserved for “direction not provided” while “360” shall be equivalent to zero degrees. The fifth subfield of four-digit size represents the radius of position uncertainty (PUM) in the manual or automatic placement of the delta in integer units of 10 micrometers.

DLT 9.009 – Delta(s) Position. This eight-character field shall contain the X and Y positional coordinates of each delta that is present on the fingerprint. The X and Y values shall be recorded in the same manner as was the core position, CRP. Multiple occurrences of delta positions shall be separated by the S separator.

Deleted: RS

FCP 9.016 – Fingerprint Characterization Process. This field of three information items identifies the characterization equipment and the amount of manual intervention employed in the characterization process. The three information items shall be separated by the U separator. The first information item shall contain the name of the organization (VEN) providing the automatic process software. The second information item shall be a vendor-supplied, alphanumeric character pair (VID) representing the model and/or version of the automatic process. The third information item (MET) shall be an ordered sequence of three characters selected from the following list indicating the degree of automation in the characterization process.

Deleted: <

Deleted: US>

| Description | Code |
|---|------|
| First (leftmost) character (classification): | |
| Automatic pattern classification without manual intervention | C |
| Manually initiated or verified pattern classification | N |
| Second (middle) character (minutiae generation): | |
| Minutiae automatically generated, no manual editing or verification | A |
| Minutiae automatically generated, examiner verified or edited | E |

Deleted: 002

Formatted: Tabs: 6.5", Right + Not at 5" + 6"

Deleted: APRIL 1, 2008

| Description | Code |
|--|------|
| Minutiae manually generated by examiner | M |
| Third (rightmost) character (ridge count): | |
| Automatic, synthesized ridge count without manual verification | S |
| Automatic, actual ridge count without manual verification | T |
| Automatic ridge count any method, examiner edited or verified | V |

FGN 9.014 – Finger Number. This AFIS/FBI two-byte field shall contain a character designating the finger position that produced the information in this Type 9 record. If the exact finger position cannot be determined, “00” shall be entered. Multiple codes are not permitted. Possible finger positions for single latent characterizations are specified in the accompanying Type-2 logical record. If multiple latents from the same person are transmitted, the particular finger position corresponding to the Type-9 record must be identified within the Type-9 record.

Allowable codes are taken from the ANSI standards, and are as follows.

| Finger Position | Code |
|-----------------|------|
| Unknown finger | 00 |
| Right thumb | 01 |
| Right index | 02 |
| Right middle | 03 |
| Right ring | 04 |
| Right little | 05 |
| Left thumb | 06 |
| Left index | 07 |
| Left middle | 08 |
| Left ring | 09 |
| Left little | 10 |

FMT 9.004 – Minutiae Format. This one-byte field shall be used to indicate whether the remainder of the record adheres to the ANSI standard or is user-defined. This field shall contain an “S” to indicate the minutiae are formatted as specified by the standard or a “U” to indicate user-defined. If the minutiae record is formatted in user-defined terms, the remaining fields of the logical record may not be applicable.

FPC 9.007 – Finger Pattern Classification. This field shall contain the fingerprint pattern classification code and shall contain two information items. The first information item shall indicate the source of the specific pattern classification code. It may be one chosen from the ANSI standard “Data Format for the Interchange of Fingerprint, Facial, & Scar Mark & Tattoo (SMT) Information” Table 8, “Pattern Classification” (table shown below), or may be a user-

Formatted: Tabs: 6.5", Right + Not at 5" + 6"
Deleted: 002
Deleted: APRIL 1, 2008

defined classification code. This item shall contain a "T" to indicate that the pattern classification code is from the ANSI standard table or a "U" to indicate a user-defined code. The second information item of this field shall contain the pattern classification code chosen from the ANSI standard or a specific user-defined code. Reference finger classes shall be separated by the ~~USFR~~ character.

Deleted: RS

| Description | Code |
|----------------------------|------|
| Plain arch | PA |
| Tented arch | TA |
| Radial loop | RL |
| Ulnar loop | UL |
| Plain whorl | PW |
| Central pocket loop | CP |
| Double loop | DL |
| Accidental whorl | AW |
| Whorl, type not designated | WN |
| Right slant loop | RS |
| Left slant loop | LS |
| Scar | SR |
| Amputation | XX |
| Unknown or unclassifiable | UN |

IDC 9.002 – Image Designation Character. This two-byte field shall be used for the identification and location of the minutiae data. The IDC contained in this field shall match the IDC found in the file content field of the Type-1 record.

IMP 9.003 – Impression Type. This one-byte binary field describes the manner by which the fingerprint image information was obtained. The allowable codes, as defined by Table 11 of the ANSI/NIST-ITL 1-2007 standard, are as follows.

| Description | Code |
|---------------------------------|------|
| Live-scan plain | 0 |
| Live-scan rolled | 1 |
| Non-live-scan plain | 2 |
| Non-live-scan rolled | 3 |
| Latent impression | 4 |
| Latent photo | 6 |
| Latent lift | 7 |
| Live-scan vertical swipe | 8 |
| Live-scan optical contact plain | 20 |

Formatted Table

Deleted: 002

Formatted: Tabs: 6.5", Right + Not at 5" + 6"

Deleted: APRIL 1, 2008

| Description | Code |
|--|------|
| Live-scan optical contact rolled | 21 |
| Live-scan non-optical contact plain | 22 |
| Live-scan non-optical contact rolled | 23 |
| Live-scan optical contactless plain | 24 |
| Live-scan optical contactless rolled | 25 |
| Live-scan non-optical contactless plain | 26 |
| Live-scan non-optical contactless rolled | 27 |
| Live-scan non-optical contactless rolled | 28 |
| Other | 29 |

Formatted Table

LEN 9.001 – Logical Record Length. This ASCII field shall contain the length of the logical record specifying the total number of bytes, including every character of all the fields contained in the record. The number of characters added to the record by the LEN field itself shall be included in calculating the value of LEN.

MAT 9.023 – Minutiae and Ridge Count Data. This AFIS/FBI field shall contain all of the individual minutiae and ridge count data associated with the current fingerprint impression. It shall be composed of as many subfields as there are minutiae stated in the minutiae count in the tagged field 9.015, NMN. Each subfield shall be devoted to a single minutia and shall consist of multiple information items. Subfields shall be separated by the R separator character. All information items within a subfield shall be separated by the U separator character. The minutiae shall be indexed from one to NMN and need not be ordered according to any particular attribute. The first two information items are required, and the others allow AFIS/FBI to achieve best possible candidate list performance. An information item may be omitted, but its separator character must remain, except all ridge count data must be present with special values designating missing or omitted data.

Deleted: <

Deleted: RS>

Deleted: <

Deleted: US>

Index number (MDX): The first information item shall be the index number, which shall be initialized to one and incremented by one for each additional minutia in the fingerprint. This index number serves to identify each individual minutia.

X, Y, and theta values (XYT): The X and Y coordinates are values ranging from zero upward, and the theta direction value, between 000 and 360, shall comprise the second required information item. These three values shall be coded and recorded as a single 11-digit integer number corresponding to the connected X, Y, and theta values, in that order. If the minutia is of Type D, the theta value shall be recorded as "000." The origin of the coordinate system shall be

Deleted: 002

Formatted: Tabs: 6.5", Right + Not at 5" + 6"

Deleted: APRIL 1, 2008

the upper left corner of the image with X increasing to the right and Y increasing downward.

The coordinate system units shall be units of 0.01mm (10 micrometers). The direction of an ending shall be into the ending ridge and the direction of a bifurcation shall be into the white space created by the dividing ridge. Angles shall be in integer degrees measured positive counterclockwise from a reference horizontal and to the right. The XY coordinates shall be applied after all rotation and translation of the image has been accomplished.

Quality measure (QMS): If present, the third information item is the minutiae quality measure. The two-digit values shall range from 0 to 63. The value zero shall indicate a manually encoded minutia. The value "1" shall indicate that no method of indicating a confidence level is available. Values between 2 and 63 shall indicate decreasing levels of confidence, with 2 denoting the greatest confidence.

Minutiae type designation (MNT): The fourth information item is the minutiae type designation. This shall be a single character chosen as follows.

| Description | Type |
|--|------|
| Ridge ending | A |
| Ridge bifurcation | B |
| Ridge ending or bifurcation, no distinction provided | C |
| Type other than ending or bifurcation | D |

Ridge count data (MRO): The fifth information item is the ridge count data for the nearest neighboring minutia of the indexed minutia. It shall be formatted as a series of eight sub-items, each consisting of a minutiae index number and a ridge count. This information shall be conveyed by combining the identity (MDX) of the neighboring minutia and the ridge count to that neighboring minutiae into a five digit number. For AFIS/FBI, the minutiae identification index (MDX) shall increase from 1 to 254. The ridge count values (one more than number of intervening ridges) shall range from 0 to 15; with 14 indicating a count greater than 13, and 15 indicating an indeterminate count. Up to eight neighboring minutiae can be recorded, each being the nearest neighbor in an angular sector of 45 degrees (octant) with the zero-th octant centered (+/- 22.5 degrees) and aligned with the direction of the minutiae and increasing in octant index in the counterclockwise direction. If a minutia does not have a neighbor in a particular octant, the value "25515" should be used for the sub-item.

Octant residuals (RSO): The last information item of eight ASCII characters indicates into which half of the octant each neighboring minutia lies. This subfield is beneficial for performance but not mandatory. The characters are ordered left to right according to the ascending octant index. The corresponding character shall be 1 if the neighboring minutia lies in the counterclockwise half of the octant. The corresponding character shall be 0 if the neighboring minutia lies in the clockwise half of the octant or if there is no neighboring minutiae in the octant.

Formatted: Tabs: 6.5", Right + Not at 5" + 6"
Deleted: 002
Deleted: APRIL 1, 2008

MRC 9.012 – Minutiae and Ridge Count Data. This field shall contain all of the individual minutiae and ridge count data associated with the current fingerprint impression. It shall be composed of as many subfields as there are minutiae stated in the minutiae count in field, MIN. Each subfield shall be devoted to a single minutia and shall consist of multiple information items. All information items shall be separated by the U separator character.

Formatted: Keep with next, Keep lines together

Deleted: US

NMN 9.015 – Number of Minutiae. This AFIS/FBI field shall contain the count of the number of minutiae recorded for this fingerprint. For AFIS/FBI, the number should not exceed 254. If the number of minutiae provided in this field exceeds the number of minutiae the system can accommodate, the list will be truncated according to the reported minutiae quality. Minutiae below the proximal crease generally are not included.

OFR 9.005 – Originating Fingerprint Reading System. The originator’s designation or name for the particular fingerprint reading system that generated the record shall be placed in the first information item of this field. The second information item of this field shall be a single character to indicate the method by which the minutiae data were read, encoded, and recorded. Allowable codes are listed in the table below. The third information item is an optional, two-character, user-generated subsystem designator that uniquely identifies the originator’s equipment.

| Description | Code |
|--|------|
| Data automatically read, encoded, and recorded, no human editing | A |
| Human editing was possible but unneeded | U |
| Data were automatically read but manually edited before encoding and recording | E |
| Data were manually read | M |

ORN 9.020 – Orientation Uncertainty. The orientation uncertainty is a substantial contribution for AFIS/FBI latent characterizations and is not used for tenprint searches. This one-to-three-character field contains an estimate of the deviation in degrees of the latent image (after rotation and translation to support editing and characterization) relative to fingertip up. The entry shall be the absolute value of the angular deviation from “tip-up.” The uncertainty would be zero if the impression were made with the extended finger aligned with the vertical of the displayed image. It is expected to be a human visual estimate of “the final image is aligned tip up within about X-degrees.” If the examiner does not provide an estimate, the default value shall be 180.

Deleted:

RDG 9.011 – Minutiae Ridge Count Indicator. This single-character field shall be used to indicate the presence of minutiae ridge count information. A zero (0) in this field indicates that no ridge count information is available. A “1” indicates that ridge count information is available.

Deleted: 002

Formatted: Tabs: 6.5", Right + Not at 5" + 6"

Deleted: APRIL 1, 2008

ROV 9.018 – Region of Value. This is a field of three to twenty subfields separated by the ~~RS~~ separator defining the vertices of a polygon that bounds the region of the image from which the characterization products have been extracted. Each eight-character subfield consists of the combination of the row and column coordinates (XYM), with the first four digits representing the column and the second four digits representing the row in the XXXXYYYY structure. The vertices shall be identified in the same coordinate system as the minutiae, cores, and deltas in units of 10 micrometers and padded on the left with zeros as appropriate. The order of the vertices must be in their consecutive order around the perimeter of the polygon, either clockwise or counterclockwise. The polygon side defined by the last subfield and the first subfield shall complete the polygon. The polygon must be a simple, plane figure with no sides crossing and no interior holes.

Deleted: <
Formatted: Keep with next, Keep lines together
Deleted: RS>

Deleted: 002
Formatted: Tabs: 6.5", Right + Not at 5" + 6"
Deleted: 2008 APRIL 1,

Table J-1. Field List for Type-9 (Minutiae) Native-Mode Tenprint Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|----------------|-----------|--------------------------------------|----------------|---------------------------|-------|-------------|------|---|--------------------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| LEN | M | 9.001 | LOGICAL RECORD LENGTH | N | 2 | 5 | 1 | 1 | 12 | 9.001:3144<GS> | |
| IDC | M | 9.002 | IMAGE DESIGNATION CHARACTER | N | 2 | 2 | 1 | 1 | 9 | 9.002:02<GS> | |
| IMP | M | 9.003 | IMPRESSION TYPE | B | 1 | 1 | 1 | 1 | 8 | 9.003:00000010<GS> | |
| FMT | M | 9.004 | MINUTIAE FORMAT | A | 1 | 1 | 1 | 1 | 8 | 9.004:U<GS> | |
| AFV | C ⁷ | 9.013 | AFIS FEATURE VECTOR | B | 2,048 | 2,048 | 0 | 1 | 2,055 | 9.013:binary data<GS> | |
| FGN | M | 9.014 | FINGER NUMBER | N | 2 | 2 | 1 | 1 | 9 | 9.014:04<GS> | |
| NMN | M ⁸ | 9.015 | NUMBER OF MINUTIAE | N | 2 | 3 | 1 | 1 | 10 | 9.015:96<GS> | |
| FCP | M ⁸ | 9.016 | FINGERPRINT CHARACTERIZATION PROCESS | | | | 1 | 1 | 26 | 9.016:AFISFBI<US>R2<US>CAV<GS> | |
| | M | | EQUIPMENT (VEN) | A | 3 | 12 | 1 | 1 | | | |
| | M | | VERSION IDENTIFIER (VID) | AN | 2 | 2 | 1 | 1 | | | |
| | M | | METHOD (MET) | A | 3 | 3 | 1 | 1 | | | |
| APC | O | 9.017 | AFIS/FBI PATTERN CLASSIFICATION | | | | 0 | 3 | 33 | 9.017:LS<US>9<US>0<RS>RS<US>13 | |
| | M | | PATTERN CLASSIFICATION (APAT) | A | 2 | 2 | 1 | 1 | | | |
| | C ¹ | | FIRST SUBPATTERN RIDGE COUNT (RCN1) | N | 1 | 2 | 0 | 1 | | | |
| | C ¹ | | SECOND SUBPATTERN RIDGE COUNT (RCN2) | N | 1 | 2 | 0 | 1 | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"
 Deleted: 002
 Deleted:
 Deleted: APRIL 1, 2008

Table J-1. Field List for Type-9 (Minutiae) Native-Mode Tenprint Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|----------------|---|-----------|--|----------------|---------------------------|------|-------------|------|---|---------------------------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| COF | O | 0.019 | COORDINATE OFFSETS | | | | 0 | 1 | 51 | 9.019:01230444<US>0 4650433<US> | |
| | M | | OFFSET TO UL CORNER SUBIMAGE (XXXXYYYY) (XYP) | N | 8 | 8 | 1 | 1 | | | |
| | C ² | | CENTER OF ROTATION IN SUBIMAGE (XXXXYYYY) (XYP) | N | 8 | 8 | 0 | 1 | | | |
| | C ² | | ROTATION ANGLE CW DEGREES (III.FFFF) (THET) | N | 8 | 8 | 0 | 1 | | | |
| | C ² | | ROTATION CENTER IN ROTATED SUBIMAGE (XXXXYYYY) (XYP) | N | 8 | 8 | 0 | 1 | | | |
| C ³ | OFFSET TO UL CORNER FINAL SUBIMAGE (XXXXYYYY) (XYP) | N | 8 | 8 | 0 | 1 | | | | | |
| CRA | O | 9.021 | CORE ATTRIBUTES | | | | 0 | 2 | 42 | 9.021:07612387<US>2 65<US>0175<RS> | |
| | C ⁴ | | LOCATION (XXXXYYYY) (XYM) | N | 8 | 8 | 0 | 1 | | | |
| | C ⁴ | | DIRECTION IN DEGREES (DDD) (DID) | N | 3 | 3 | 0 | 1 | | | |
| | C ⁴ | | POSITION UNCERTAINTY (RRRR) (PUM) | N | 4 | 4 | 0 | 1 | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

Table J-1. Field List for Type-9 (Minutiae) Native-Mode Tenprint Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|----------------|-----------|--------------------------------------|----------------|---------------------------|------|-------------|------|---|--------------------------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| DLA | O | 9.022 | DELTA ATTRIBUTES | | | | 0 | 2 | 58 | 9.022:07612387<US>0 78<US>210<US> | |
| | C ⁵ | | LOCATION (XXXXYYYY) (XYM) | N | 8 | 8 | 0 | 1 | | | |
| | C ⁵ | | UPWARD FLOW DIRECTION (DDD) (DID) | N | 3 | 3 | 0 | 1 | | | |
| | C ⁵ | | LEFTWARD FLOW DIRECTION (DDD) (DID) | N | 3 | 3 | 0 | 1 | | | |
| | C ⁵ | | RIGHTWARD FLOW DIRECTION (DDD) (DID) | N | 3 | 3 | 0 | 1 | | | |
| | C ⁵ | | POSITION UNCERTAINTY (RRRR) (PUM) | N | 4 | 4 | 0 | 1 | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

Table J-1. Field List for Type-9 (Minutiae) Native-Mode Tenprint Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|--|-----------|--|----------------|---------------------------|------|-------------|------|---|---------------------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| MAT | M ^B | 9.023 | MINUTIAE AND RIDGE COUNT DATA | | | | 1 | 254 | 19,818 | 9.023:001<US>XXXXY YYY<US>QQ | |
| | M | | MINUTIAE INDEX NUMBER (II) (MDX) | N | 3 | 3 | 1 | 1 | | | |
| | M | | LOCATION DIRECTION (XXXXYYY) (XYT) | N | 11 | 11 | 1 | 1 | | | |
| | M | | QUALITY MEASURE (QMS) | N | 2 | 2 | 1 | 1 | | | |
| | M | | MINUTIAE TYPE (MNT) | A | 1 | 1 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 0 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 1 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 2 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 3 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| M | MINUTIAE INDEX AND RIDGE COUNT OCTANT 4 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

Table J-1. Field List for Type-9 (Minutiae) Native-Mode Tenprint Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|-----------|-----------|--|----------------|---------------------------|------|-------------|------|---|------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 5 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 6 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 7 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | O | | OCTANT RESIDUALS (RRRRRRR) (RSO) | N | 8 | 8 | 0 | 1 | | | |
| CHQ | O | 9.024 | CHARACTERIZATION QUALITY | N | 1 | 3 | 0 | 1 | 10 | 9.024:73<GS> | |
| CLQ | O | 9.025 | CLASSIFIER QUALITY | N | 6 | 7 | 0 | 1 | 14 | 9.025:1.0525<GS> | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

Table J-2. Field List for Type-9 (Minutiae) Native-Mode Latent Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|----------------|-----------|--------------------------------------|----------------|---------------------------|-------|-------------|------|---|------------------------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| LEN | M | 9.001 | LOGICAL RECORD LENGTH | N | 2 | 5 | 1 | 1 | 12 | 9.001:3144<GS> | |
| IDC | M | 9.002 | IMAGE DESIGNATION CHARACTER | N | 2 | 2 | 1 | 1 | 9 | 9.002:00<GS> | |
| IMP | M | 9.003 | IMPRESSION TYPE | B | 1 | 1 | 1 | 1 | 8 | 9.003:00000010<GS> | |
| FMT | M | 9.004 | MINUTIAE FORMAT | A | 1 | 1 | 1 | 1 | 8 | 9.004:U<GS> | |
| AFV | C ⁷ | 9.013 | AFIS FEATURE VECTOR | B | 2,048 | 2,048 | 0 | 1 | 2,055 | 9.013:binary data<GS> | |
| FGN | C ⁶ | 9.014 | FINGER NUMBER | N | 2 | 2 | 0 | 1 | 9 | 9.014:04<GS> | |
| NMN | M ⁸ | 9.015 | NUMBER OF MINUTIAE | N | 2 | 3 | 1 | 1 | 10 | 9.015:17<GS> | |
| FCP | M ⁸ | 9.016 | FINGERPRINT CHARACTERIZATION PROCESS | | | | 1 | 1 | 26 | 9.016:AFISFBI<US>R2<US>CAV<GS> | |
| | M | | EQUIPMENT (VEN) | A | 3 | 12 | 1 | 1 | | | |
| | M | | VERSION IDENTIFIER (VID) | AN | 2 | 2 | 1 | 1 | | | |
| | M | | METHOD (MET) | A | 3 | 3 | 1 | 1 | | | |
| APC | O | 9.017 | AFIS/FBI PATTERN CLASSIFICATION | | | | 0 | 3 | 33 | 9.017:LS<US>9<US>0<RS>RS<US>13 | |
| | M | | PATTERN CLASSIFICATION (APAT) | A | 2 | 2 | 1 | 1 | | | |
| | C ¹ | | FIRST SUBPATTERN RIDGE COUNT (RCN1) | N | 1 | 2 | 0 | 1 | | | |
| | C ¹ | | SECOND SUBPATTERN RIDGE COUNT (RCN2) | N | 1 | 2 | 0 | 1 | | | |
| ROV | O | 9.018 | REGION OF VALUE POLYGON | | | | 0 | 1 | 186 | 9.018:10160508<RS>24131016<RS>2032 | |
| | M | | VERTEX (XXXXXXXX) (XYM) | N | 8 | 8 | 3 | 20 | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"
 Deleted: 002
 Deleted:
 Deleted: APRIL 1, 2008

Table J-2. Field List for Type-9 (Minutiae) Native-Mode Latent Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|----------------|-----------|--|----------------|---------------------------|------|-------------|------|---|---------------------------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| COF | O | 9.019 | COORDINATE OFFSETS | | | | 0 | 1 | 51 | 9.019:01230444<US>0 4650433<US> | |
| | M | | OFFSET TO UL CORNER SUBIMAGE (XXXXYYYY) (XYP) | N | 8 | 8 | 1 | 1 | | | |
| | C ² | | CENTER OF ROTATION IN SUBIMAGE (XXXXYYYY) (XYP) | N | 8 | 8 | 0 | 1 | | | |
| | C ² | | ROTATION ANGLE CW DEGREES (III.FFFF) (THET) | N | 8 | 8 | 0 | 1 | | | |
| | C ² | | ROTATION CENTER IN ROTATED SUBIMAGE (XXXXYYYY) (XYP) | N | 8 | 8 | 0 | 1 | | | |
| | C ³ | | OFFSET TO UL CORNER FINAL SUBIMAGE (XXXXYYYY) (XYP) | N | 8 | 8 | 0 | 1 | | | |
| ORN | M ⁸ | 9.020 | ORIENTATION UNCERTAINTY | N | 1 | 3 | 1 | 1 | 10 | 9.020:25<GS> | |
| CRA | O | 9.021 | CORE ATTRIBUTES | | | | 0 | 2 | 42 | 9.021:07612387<US>2 65<US>0175<RS> | |
| | C ⁴ | | LOCATION (XXXXYYYY) (XYM) | N | 8 | 8 | 0 | 1 | | | |
| | C ⁴ | | DIRECTION IN DEGREES (DDD) (DID) | N | 3 | 3 | 0 | 1 | | | |
| | C ⁴ | | POSITION UNCERTAINTY (RRRR) (PUM) | N | 4 | 4 | 0 | 1 | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

Table J-2. Field List for Type-9 (Minutiae) Native-Mode Latent Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|----------------|-----------|--|----------------|---------------------------|------|-------------|------|---|--------------------------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| DLA | O | 9.022 | DELTA ATTRIBUTES | | | | 0 | 2 | 58 | 9.022:07612387<US>0 78<US>210<US> | |
| | C ⁵ | | LOCATION (XXXXYYYY) (XYM) | N | 8 | 8 | 0 | 1 | | | |
| | C ⁵ | | UPWARD FLOW DIRECTION (DDD) (DID) | N | 3 | 3 | 0 | 1 | | | |
| | C ⁵ | | LEFTWARD FLOW DIRECTION (XXXXYYYY) (XYM) | N | 3 | 3 | 0 | 1 | | | |
| | C ⁵ | | RIGHTWARD FLOW DIRECTION (DDD) (DID) | N | 3 | 3 | 0 | 1 | | | |
| | C ⁵ | | POSITION UNCERTAINTY (RRR) (PUM) | N | 4 | 4 | 0 | 1 | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

Table J-2. Field List for Type-9 (Minutiae) Native-Mode Latent Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|----------------|-----------|--|----------------|---------------------------|------|-------------|------|---|----------------------------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| MAT | M ⁸ | 9.023 | MINUTIAE AND RIDGE COUNT DATA | | | | 1 | 254 | 19,818 | 9.023:001<US>XXXXY YYY <US>QQ | |
| | M | | MINUTIAE INDEX NUMBER (III) (MDX) | N | 3 | 3 | 1 | 1 | | | |
| | M | | LOCATION DIRECTION (XXXXYYYY) (XYT) | N | 11 | 11 | 1 | 1 | | | |
| | M | | QUALITY MEASURE (QMS) | N | 2 | 2 | 1 | 1 | | | |
| | M | | MINUTIAE TYPE (MNT) | A | 1 | 1 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 0 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 1 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 2 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 3 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 4 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

Table J-2. Field List for Type-9 (Minutiae) Native-Mode Latent Logical Record

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Example Data | Special Characters Allowed |
|------------|-----------|-----------|--|----------------|---------------------------|------|-------------|------|---|--------------|----------------------------|
| | | | | | Min. | Max. | Min. | Max. | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 5 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 6 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | M | | MINUTIAE INDEX AND RIDGE COUNT OCTANT 7 (NNCC) (MRO) | N | 5 | 5 | 1 | 1 | | | |
| | O | | OCTANT RESIDUALS (RRRRRRR) (RSO) | N | 8 | 8 | 0 | 1 | | | |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.
 Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 3" + 5.13" + 6"

Deleted: 002

Deleted:

Deleted: APRIL 1, 2008

APPENDIX J REFERENCE NOTES

1. If tagged field 9.017 “APC” is present, at least one pattern classification must be provided. Up to two additional reference classes may be provided for a maximum of three total possible patterns.

2. If no rotation has been applied, the second, third, and fourth information item positions may be empty, but the intervening ^U separators must remain.

Deleted: <
Deleted: US>

3. If no second sub-image is generated, the fifth information item position may be empty.

4. Maximum of two cores reported. If only one core, the first subfield shall be terminated with the ^G separator instead of the ^R separator, and the second subfield shall be deleted.

Deleted: <
Deleted: GS>

5. Maximum of two deltas reported. If only one delta, the first subfield shall be terminated with the ^G separator instead of the ^R separator, and the second subfield shall be deleted.

Deleted: <
Deleted: RS>

6. Mandatory only for multiple-finger latent search request to specify the finger characterized herein.

Deleted: <GS>
Deleted: <
Deleted: RS>

7. Tagged field 9.04=‘U’ indicates that a Native Mode AFIS/FBI format is being provided in this Type-9 record. If the AFV field (9.013) is not present, the following ANSI standard Type-9 record will be parsed for sufficient features information. The Type-9 in Table J-1 defines the ANSI standard logical record sequence for a native mode tenprint search request. “9.001:” + LEN + <GS> + “9.002:” + IDC + <GS> + “9.003:” + IMP + <GS> + “9.004:” + FMT + (<GS> + “9.013:” + AFV) + <GS> + “9.014:” + FGN + <GS> + “9.015:” + NMN + <GS> + “9.016:” + FCP + (<GS> + “9.017:” + APC) + (<GS> + “9.019:” + COF) + <GS> + “9.021:” + CRA + <GS> + “9.022:” + DLA + <GS> + “9.023:” + MAT + (<GS> + “9.024:” + CHQ) + (<GS> + “9.025:” + CLQ) + <FS>. The Type-9 in Table J-2 defines the ANSI standard logical record sequence for a remote native mode latent search request. “9.001:” + LEN + <GS> + “9.002:” + IDC + <GS> + “9.003:” + IMP + <GS> + “9.004:” + FMT + (<GS> + “9.013:” + AFV) + <GS> + “9.014:” + FGN + <GS> + “9.015:” + NMN + <GS> + “9.016:” + FCP + (<GS> + “9.017:” + APC) + (<GS> + “9.018:” + ROV) + (<GS> + “9.019:” + COF) + <GS> + “9.020:” + ORN + <GS> + “9.021:” + CRA + <GS> + “9.022:” + DLA + <GS> + “9.023:” + MAT + <FS>.

8. This field is optional if the feature vector, field 9.013, has been provided.

APPENDIX K

DESCRIPTORS AND FIELD EDIT SPECIFICATIONS FOR TYPE-10 LOGICAL RECORDS

Deleted: AND LOGICAL RECORD
FIELD LISTS FOR TYPE-2 (PHOTO)
RECORDS

Type-10 records shall contain facial and/or SMT image data and related ASCII information pertaining to the specific image contained in this record. It shall be used to exchange both grayscale and color image data in a compressed or uncompressed form. Appendix K provides the Type-2 record fields applicable to the photo and/or SMT Type-10 image record. However, the byte counts do not always account for any separator characters. For complete description of the Type-10 record fields, see ANSI/NIST-ITL 1-2007 contained in Attachment 1 to this document.

Tables K-1 through K-4 have been removed as Table I-1 summarizes all the mandatory and optional Type-2 fields necessary for these TOTs and Appendix C details the field edit specifications for those fields.

Deleted: 002
Formatted: Tabs: 6.5", Right + Not
at 3"
Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

K-1

~~XXXXX 99, 9999~~

Table K-1. Field List for Subject Photo Request (CPR) Transactions

NOTE: This table has been removed. Detail on the elements for the transactions can be found in Table C-1. Optional and Required fields are summarized in Table I-1.

Deleted: ¶
¶ Identifier [58]

IAFIS-DOC-01078-8.1

K-2

XXXXX 99, 9999.

Formatted: Tabs: 9", Right + Not at 8.75"
Deleted: 002
Deleted:
Deleted: APRIL 1, 2008

Table K-2. Field List for Subject Photo Delete Request (CPD) Transactions

NOTE: This table has been removed. Detail on the elements for the transactions can be found in Table C-1. Optional and Required fields are summarized in Table I-1.

Deleted: ¶
Identifier [59]

IAFIS-DOC-01078-8.1

K-3

XXXXX 99, 9999.

Formatted: Tabs: 9", Right + Not at 8.75"
Deleted: 002
Deleted:
Deleted: APRIL 1, 2008

Table K-3. Field List for Subject Photo Request Response (PRR) Transactions

NOTE: This table has been removed. Detail on the elements for the transactions can be found in Table C-1. Optional and Required fields are summarized in Table I-1.

Deleted: ¶
Identifier

IAFIS-DOC-01078-8.1

K-4

XXXXX 99, 9999.

Formatted: Tabs: 9", Right + Not at 8.75"
Deleted: 002
Deleted:
Deleted: APRIL 1, 2008

Table K-4. Field List for Subject Photo Delete Request Response (PDR) Transactions

NOTE: This table has been removed. Detail on the elements for the transactions can be found in Table C-1. Optional and Required fields are summarized in Table I-1.

Deleted: ¶ Identifier

IAFIS-DOC-01078-8.1

K-5

XXXXX 99, 9999.

Formatted: Tabs: 9", Right + Not at 8.75"
Deleted: 002
Deleted:
Deleted: APRIL 1, 2008

Table K-5. Field List for Type-10 (Subject Photo) Logical Records

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Incl. Character Separators and Field Number | Example Data |
|-------------------|----------------|-----------|-----------------------------|----------------|---------------------------|-----------|-------------|------|---|---|
| | | | | | Min. | Max. | Min. | Max. | | |
| LEN | M | 10.001 | LOGICAL RECORD LENGTH | N | 4 | 8 | 1 | 1 | 15 | 10.001:909<GS> |
| IDC | M | 10.002 | IMAGE DESIGNATION CHARACTER | N | 2 | 5 | 1 | 1 | 12 | 10.002:0200<GS> |
| IMT | M | 10.003 | IMAGE TYPE | A | 5 | 7 | 1 | 1 | 14 | 10.003:FACE<GS> |
| SRC | M | 10.004 | SOURCE AGENCY/ORI | AN | 10 | 36 | 1 | 1 | 43 | 10.004:NY0303000S<GS> |
| PHD | M | 10.005 | PHOTO DATE | N | 9 | 9 | 1 | 1 | 16 | 10.005:19960201<GS> |
| HLL | M | 10.006 | HORIZONTAL LINE LENGTH | N | 4 | 5 | 1 | 1 | 12 | 10.006:480<GS> |
| VLL | M | 10.007 | VERTICAL LINE LENGTH | N | 4 | 5 | 1 | 1 | 12 | 10.007:600<GS> |
| SLC | M | 10.008 | SCALE UNITS | N | 2 | 2 | 1 | 1 | 9 | 10.008:0<GS> |
| HPS | M | 10.009 | HORIZONTAL PIXEL SCALE | N | 2 | 5 | 1 | 1 | 12 | 10.009:01<GS> |
| VPS | M | 10.010 | VERTICAL PIXEL SCALE | N | 2 | 5 | 1 | 1 | 12 | 10.010:01<GS> |
| CGA | M | 10.011 | COMPRESSION ALGORITHM | AN | 4 | 6 | 1 | 1 | 13 | 10.011:JPEGB<GS> |
| CSP | M | 10.012 | COLOR SPACE | A | 4 | 5 | 1 | 1 | 12 | 10.012:YCC<GS> |
| SAP ⁸ | C ⁸ | 10.013 | SUBJECT ACQUISITION PROFILE | N | 2 | 4 | 1 | 1 | 11 | 10.013:11<GS> |
| SHPS ⁸ | O | 10.016 | SCAN HORIZONTAL PIXEL SCALE | N | 2 | 5 | 0 | 1 | 12 | 10.016:<GS> |
| SVPS ⁸ | O | 10.017 | SCAN VERTICAL PIXEL SCALE | N | 2 | 5 | 0 | 1 | 12 | 10.017:<GS> |
| POS | M | 10.020 | SUBJECT POSE | A | 2 | 2 | 0 | 1 | 9 | 10.020:L<GS> |
| POA | O | 10.021 | POSE OFFSET ANGLE | N | 2 | 5 | 0 | 1 | 12 | 10.021:45<GS> |
| PXS | O | 10.022 | PHOTO DESCRIPTION | A | 4 | 21 | 0 | 9 | 196 | 10.022:GLASSES<GS> |
| PAS ⁸ | O | 10.023 | PHOTO ACQUISITION SOURCE | A | 7 | 15 | 0 | 1 | 22 | 10.023:<GS> |
| SQS ⁸ | O | 10.024 | SUBJECT QUALITY SCORE | N | 10 | 35 | 0 | 9 | 322 | 10.024:<GS> |
| SPA ⁸ | O | 10.025 | SUBJECT POSE ANGLES | N | 9 | 23 | 0 | 1 | 30 | 10.025:<GS> |
| SXS ⁸ | O | 10.026 | SUBJECT FACIAL DESCRIPTION | A | 6 | 21 | 0 | 50 | 1,057 | 10.026:<GS> |
| SEC ⁸ | O | 10.027 | SUBJECT EYE COLOR | A | 4 | 4 | 0 | 1 | 11 | 10.027:<GS> |
| SHC ⁸ | O | 10.028 | SUBJECT HAIR COLOR | A | 4 | 8 | 0 | 2 | 23 | 10.028:<GS> |
| SFP ⁸ | O | 10.029 | SUBJECT FEATURE POINTS | N | 10 | 18 | 0 | 88 | 1,591 | 10.028:<GS> |
| DMM ⁸ | O | 10.030 | DEVICE MONITORING MODE | A | 8 | 11 | 0 | 1 | 18 | 10.030:<GS> |
| SMT ⁸ | C ⁷ | 10.040 | NCIC DESIGNATION CODE | A | 4 | 11 | 1 | 3 | 40 | 10.040:XXXXXX<GS> |
| SMS ⁸ | O | 10.041 | SCAR/MARK/TATTOO SIZE | N | 4 | 6 | 0 | 1 | 13 | 10.041:20<US>40<GS> |
| SMD ⁸ | O | 10.042 | SMT DESCRIPTORS | AN | 16 | 51 | 0 | 9 | 466 | 10.042:TATTOO<US>SYMBOL<US> GANG<US>MS13<GS> |
| COL ⁸ | O | 10.043 | COLORS PRESENT | A | 4 | 21 | 0 | 9 | 196 | 10.043:BLACK<GS> |
| DAT | M | 10.999 | IMAGE DATA | B | 2 | 5,000,000 | 1 | 1 | 5,000,008 | 10.999:image data<FS> |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Formatted: Tabs: 9", Right + Not at 8.75"
 Deleted: 002
 Deleted:
 Deleted: APRIL 1, 2008

APPENDIX K REFERENCE NOTES

1. DOA must be present to obtain a specific set of photos, otherwise the latest set of photos will be sent.
2. CRI field required only for a photo delete request.
3. Response code will contain a value to indicate the condition of the request “Y” for successful, “N” for rejected.
4. DOA must be present to request a delete action.
5. FBI is mandatory in the Type-2 record if the photo requested is associated with a criminal record.
6. UCN is mandatory in the Type-2 record if the photo requested is associated with other than a criminal record (*e.g.*, civil record), but optionally may contain an FBI number.
7. SMT (NCIC Designation code) is mandatory if the image type is SMT. For SAP to be included, IMT (10.003) must contain “FACE.”
8. Source: ANSI/NIST-ITL 1-2007.

| |
|--|
| Formatted: Tabs: 6.5", Right + Not at 5" + 5.13" |
| Deleted: 002 |
| Deleted: APRIL 1, 2008 |

APPENDIX L

SUMMARY TABLES

This appendix contains several tables that collect in one place summaries of information that otherwise is dispersed through the EBTS document. Tables L-1 and L-2 cross-reference all currently used EBTS elements from their Element IDs to their Tag Numbers. The cross-references appear in two ways. Table L-1 lists the fields in Element ID order. Table L-2 lists them in Tag Number order.

In several instances, Tag Numbers shown have alpha suffixes. These suffixes are given only to make the list complete (*i.e.*, to include subfields as well as simple elements in the list) and to aid in determination of what the parent field is in such cases. For example, the field tag 2.084A identifies this (FGP) as a subfield of AMP (2.084). *Under no circumstance is a subfield tag to be used in formatting any EBTS electronic message. Subfields do not have independent tags, either with or without an alpha suffix.*

Tables L-3 and L-4 list record set requirements for each EBTS transaction type. Table L-3 lists the record set requirements for each type of submission. Table L-4 lists record set requirements for each response type. In instances where these requirements differ depending upon which submission the response is made for, several entries will be present. Note that the Type-4 and Type-14 requirements for tenprint submissions are stated to be 14. If less than 14 images are submitted, each missing image must be noted in the AMP field of the accompanying Type-2 record. The TPIS and TPFS indicate that N-10 Type-4/14 or Type-9 records, respectively, are to be submitted. N is the minimum number of fingers required by AFIS for a search, and N = 2 for IAFIS.

Deleted: recordset

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

IAFIS-DOC-01078-8.1

L-1

XXXXX 99, 9999

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|------------|-----------------|--------------------------------------|
| ACN | 2.071 | ACTION TO BE TAKEN |
| AFM | 14.024 | ALTERNATE FINGERPRINT QUALITY METRIC |
| AFV | 9.013 | AFIS FEATURE VECTOR |
| AGR | 2.023 | AGE RANGE |
| AKA | 2.019 | ALIASES |
| AMP | 2.084 | AMPUTATED OR BANDAGED |
| AMPCD | 2.084B* | AMPUTATED OR BANDAGED CODE |
| AOL | 2.047B* | ARREST OFFENSE LITERAL |
| APAT | 9.017A* | PATTERN CLASSIFICATION |
| APC | 9.017 | AFIS/FBI PATTERN CLASSIFICATION |
| APM | 15.024 | ALTERNATE PALMPRINT QUALITY METRIC |
| ASL | 2.047 | ARREST SEGMENT LITERAL |
| ATN | 2.006 | “ATTENTION” INDICATOR |
| BCD | 99.005 | BIOMETRIC CAPTURE DATE |
| BDB | 99.999 | BIOMETRIC DATA BLOCK |
| BDQ | 99.102 | BIOMETRIC DATA QUALITY |
| BFO | 99.103 | BDB FORMAT OWNER |
| BFT | 99.104 | BIOMETRIC FORMAT TYPE |
| <u>BPX</u> | <u>13.012</u> | <u>BITS PER PIXEL</u> |
| BPX | 14.012 | BITS PER PIXEL |
| BPX | 15.012 | BITS PER PIXEL |
| BPX | 16.012 | BITS PER PIXEL |
| BPX | 17.012 | BITS PER PIXEL |
| BTY | 99.101 | BIOMETRIC TYPE |
| CAN | 2.064 | CANDIDATE LIST |
| CCN | 2.094 | COURT CASE NUMBER |
| CDD | 2.051A* | COURT DISPOSITION DATE |
| CFS | 2.077 | CANCEL FP SEARCH |
| CGA | 10.011 | COMPRESSION ALGORITHM |
| <u>CGA</u> | <u>13.011</u> | <u>COMPRESSION ALGORITHM</u> |
| CGA | 14.011 | COMPRESSION ALGORITHM |
| CGA | 15.011 | COMPRESSION ALGORITHM |
| CGA | 16.011 | COMPRESSION ALGORITHM |
| CGA | 17.011 | COMPRESSION ALGORITHM |
| CHQ | 9.024 | CHARACTERIZATION QUALITY |
| CIN | 2.010 | CONTRIBUTOR CASE IDENTIFIER NUMBER |
| CIN_ID | 2.010B* | CONTRIBUTOR CASE ID |
| CIN_PRE | 2.010A* | CONTRIBUTOR CASE PREFIX |

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Formatted: Font: 7 pt, Not Bold, Font color: Black

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|------------|-----------------|--|
| CIX | 2.011 | CONTRIBUTOR CASE IDENTIFIER EXTENSION |
| CLQ | 9.025 | CLASSIFIER QUALITY |
| CNT | 1.003 | FILE CONTENT |
| COF | 9.019 | COORDINATE OFFSETS |
| COL | 2.051B* | COURT OFFENSE LITERAL |
| COL | 10.043 | COLORS PRESENT |
| <u>COM</u> | <u>13.020</u> | <u>COMMENT</u> |
| COM | 14.020 | COMMENT |
| COM | 15.020 | COMMENT |
| COM | 16.020 | COMMENT |
| CPL | 2.051C* | OTHER COURT SENTENCE PROVISION LITERAL |
| CRA | 9.021 | CORE ATTRIBUTES |
| CRI | 2.073 | CONTROLLING AGENCY IDENTIFIER |
| CRN | 2.085 | CIVIL RECORD NUMBER |
| CRP | 9.008 | CORE POSITION |
| CSF | 2.2006 | CASCADED SEARCH FLAG |
| CSL | 2.051 | COURT SEGMENT LITERAL |
| CSP | 10.012 | COLOR SPACE |
| CSP | 16.013 | COLOR SPACE |
| CSP | 17.013 | COLOR SPACE |
| CSR | 2.048 | CIVIL SEARCH REQUESTED INDICATOR |
| CST | 2.061 | CASE TITLE |
| CTZ | 2.021 | COUNTRY OF CITIZENSHIP |
| DAI | 1.007 | DESTINATION AGENCY IDENTIFIER |
| DAT | 1.005 | DATE |
| <u>DAT</u> | <u>13.999</u> | <u>IMAGE DATA</u> |
| DAT | 10.999 | IMAGE DATA |
| DAT | 14.999 | IMAGE DATA |
| DAT | 15.999 | IMAGE DATA |
| DAT | 16.999 | IMAGE DATA |
| DID | 9.021B* | DIRECTION IN DEGREES (DDD) |
| DID | 9.022B* | UPWARD FLOW DIRECTION (DDD) |
| DID | 9.022C* | LEFTWARD FLOW DIRECTION (DDD) |
| DID | 9.022D* | RIGHTWARD FLOW DIRECTION (DDD) |
| DLA | 9.022 | DELTA ATTRIBUTES |
| DLT | 9.009 | DELTA POSITION |
| DMI | 2.2013 | DISPOSITION MAINTENANCE INDICATOR |
| DMM | 10.030 | DEVICE MONITORING MODE |
| DMM | 14.030 | DEVICE MONITORING MODE |

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Formatted: Font: 7 pt, Not Bold, Font color: Black

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|------------|-----------------|--------------------------------------|
| DMM | 15.030 | DEVICE MONITORING MODE |
| DMM | 16.030 | DEVICE MONITORING MODE |
| DMM | 17.030 | DEVICE MONITORING MODE |
| DNAC | 2.2018 | DNA CODIS FLAG |
| DNAF | 2.2016 | DNA FLAG |
| DOA | 2.045 | DATE OF ARREST |
| DOB | 2.022 | DATE OF BIRTH |
| DOO | 2.047A* | DATE OF OFFENSE |
| DORI | 2.2017 | DNA LOCATION |
| DOS | 2.046 | DATE OF ARREST-SUFFIX |
| DPR | 2.038 | DATE PRINTED |
| DUI | 17.017 | DEVICE UNIQUE IDENTIFIER |
| EAD | 2.039 | EMPLOYER AND ADDRESS |
| ECL | 17.020 | EYE COLOR |
| EID | 2.049 | EMPLOYEE IDENTIFICATION NUMBER |
| ERS | 2.075 | ELECTRONIC RAP SHEET |
| ETC | 2.069 | ESTIMATED TIME TO COMPLETE |
| EXP | 2.080 | RESPONSE EXPLANATION |
| EYE | 2.031 | COLOR EYES |
| FBI | 2.014 | FBI NUMBER |
| <u>FCD</u> | <u>14.005</u> | <u>TENPRINT CAPTURE DATE</u> |
| FCP | 9.016 | FINGERPRINT CHARACTERIZATION PROCESS |
| FFN | 2.003 | FBI FILE NUMBER |
| FGN | 9.014 | FINGER NUMBER |
| FGP | 2.034A* | FINGER NUMBER |
| FGP | 2.084A* | FINGER NUMBER |
| FGP | 2.091A* | FINGER NUMBER |
| FGP | 2.092A* | FINGER NUMBER |
| FGP | 2.074 | FINGER POSITION |
| FGP | 7.004 | FINGER POSITION |
| FGP | 9.006 | FINGER POSITION |
| <u>FGP</u> | <u>13.013</u> | <u>FINGER/PALM POSITION</u> |
| FGP | 14.013 | FINGER POSITION |
| FID | 17.003 | FEATURE IDENTIFIER |
| FIU | 2.072 | FINGERPRINT IMAGE(S) UPDATED |
| FMT | 9.004 | MINUTIAE FORMAT |
| FNR | 2.057 | FINGER NUMBER(S) REQUESTED |
| FNU | 2.064A* | FBI NUMBER |
| FPC | 2.033 | NCIC FINGERPRINT CLASSIFICATION |

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Formatted: Font: 7 pt, Not Bold, Font color: Black

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|------------|-----------------|------------------------------------|
| FPC | 9.007 | FINGERPRINT PATTERN CLASSIFICATION |
| GCA | 7.008 | GRAYSCALE COMPRESSION ALGORITHM |
| GEO | 2.044 | GEOGRAPHICAL AREA OF SEARCH |
| GUI | 17.018 | GLOBAL UNIQUE IDENTIFIER |
| HAI | 2.032 | HAIR COLOR |
| HDV | 99.100 | CBEFF HEADER VERSION |
| HGT | 2.027 | HEIGHT |
| HLL | 7.006 | HORIZONTAL LINE LENGTH |
| HLL | 10.006 | HORIZONTAL LINE LENGTH |
| <u>HLL</u> | <u>13.006</u> | <u>HORIZONTAL LINE LENGTH</u> |
| HLL | 14.006 | HORIZONTAL LINE LENGTH |
| HLL | 15.006 | HORIZONTAL LINE LENGTH |
| HLL | 16.006 | HORIZONTAL LINE LENGTH |
| HLL | 17.006 | HORIZONTAL LINE LENGTH |
| HPS | 10.009 | HORIZONTAL PIXEL SCALE |
| <u>HPS</u> | <u>13.009</u> | <u>HORIZONTAL PIXEL SCALE</u> |
| HPS | 14.009 | HORIZONTAL PIXEL SCALE |
| HPS | 15.009 | HORIZONTAL PIXEL SCALE |
| HPS | 16.009 | HORIZONTAL PIXEL SCALE |
| HPS | 17.009 | HORIZONTAL PIXEL SCALE |
| HTR | 2.028 | HEIGHT RANGE |
| ICO | 2.056 | IDENTIFICATION COMMENTS |
| IDC | 2.002 | IMAGE DESIGNATION CHARACTER |
| IDC | 7.002 | IMAGE DESIGNATION CHARACTER |
| IDC | 9.002 | IMAGE DESIGNATION CHARACTER |
| IDC | 10.002 | IMAGE DESIGNATION CHARACTER |
| <u>IDC</u> | <u>13.002</u> | <u>IMAGE DESIGNATION CHARACTER</u> |
| IDC | 14.002 | IMAGE DESIGNATION CHARACTER |
| IDC | 15.002 | IMAGE DESIGNATION CHARACTER |
| IDC | 16.002 | IMAGE DESIGNATION CHARACTER |
| IDC | 17.002 | IMAGE DESIGNATION CHARACTER |
| IDC | 99.002 | IMAGE DESIGNATION CHARACTER |
| IFS | 2.066 | IDENTIFICATION FIREARMS SALES |
| IID | 17.999 | IRIS IMAGE DATA |
| IIR | 2.2012 | IRIS IMAGES REQUESTED |
| IMA | 2.067 | IMAGE CAPTURE EQUIPMENT |
| IMG | 7.009 | IMAGE DATA |
| IMP | 7.003 | IMPRESSION TYPE |
| IMP | 9.003 | IMPRESSION TYPE |

Formatted

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

~~IAFIS-DOC-01078-8.1~~

~~L-5~~

~~XXXXX 99, 9999~~

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name | |
|---|-----------------|--|--|
| <u>IMP</u> | <u>13.003</u> | <u>IMPRESSION TYPE</u> | |
| IMP | 14.003 | IMPRESSION TYPE | |
| IMP | 15.003 | IMPRESSION TYPE | |
| IMT | 2.062 | IMAGE TYPE (IF TYPE -7 IMAGES) | |
| IMT | 10.003 | IMAGE TYPE | |
| IPC | 17.016 | IMAGE PROPERTY CODE | |
| IQM | 14.022 | IMAGE QUALLITY METRIC | |
| IQS | 17.024 | IMAGE QUALITY SCORE | |
| IRD | 17.005 | IRIS CAPTURE DATE | |
| ISR | 7.005 | IMAGE SCANNING RESOLUTION | |
| <u>LCD</u> | <u>13.005</u> | <u>LATENT CAPTURE DATE</u> | Deleted: LCD ... [62] |
| LCN | 2.012 | FBI LATENT CASE NUMBER | |
| LCX | 2.013 | FBI LATENT CASE EXTENSION | |
| LEN | 1.001 | LOGICAL RECORD LENGTH | |
| LEN | 2.001 | LOGICAL RECORD LENGTH | |
| LEN | 7.001 | LOGICAL RECORD LENGTH | |
| LEN | 9.001 | LOGICAL RECORD LENGTH | |
| LEN | 10.001 | LOGICAL RECORD LENGTH | |
| <u>LEN</u> | <u>13.001</u> | <u>LOGICAL RECORD LENGTH</u> | Formatted Formatted: Font: Times New Roman |
| LEN | 14.001 | LOGICAL RECORD LENGTH | |
| LEN | 15.001 | LOGICAL RECORD LENGTH | |
| LEN | 16.001 | LOGICAL RECORD LENGTH | |
| LEN | 17.001 | LOGICAL RECORD LENGTH | |
| LEN | 99.001 | LOGICAL RECORD LENGTH | |
| <u>LQM</u> | <u>13.024</u> | <u>LATENT QUALITY METRIC</u> | |
| MAK | 2.067A* | ORIGINATING FINGERPRINT READING SYSTEM MAKE | |
| MAT | 9.023 | MINUTIAE AND RIDGE COUNT DATA | |
| MCL | 14.014 | MAJOR CASE PRINT | |
| MCOUNT | 9.012E* | RIDGE COUNT DATA | |
| MCS | 14.015 | MAJOR CASE PRINT SEGMENT POSITION(S) | |
| MDX | 9.012A* | INDEX NUMBER | |
| MDX | 9.023A* | MINUTIAE INDEX NUMBER (III) | |
| MET | 9.016C* | METHOD | |
| MIL | 2.042 | MILITARY CODE | |
| MMS | 17.019 | MAKE/MODEL/SERIAL NUMBER | |
| MNT | 9.023D* | MINUTIA TYPE | |
| MNU | 2.017 | MISCELLANEOUS IDENTIFICATION NUMBER | |
| MODL | 2.067B* | ORIGINATING FINGERPRINT READING SYSTEM MODEL | |
| MQUAL | 9.012C* | QUALITY MEASURE | |
| *Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction | | | Formatted: Font: 7 pt, Not Bold, Font color: Black Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38" Deleted: 002 Deleted: APRIL 1, 2008 Formatted: Position: Vertical: 0.01", Relative to: Paragraph Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38" |
| <u>IAFIS-DOC-01078-8.1</u> | <u>L-6</u> | <u>XXXXX 99, 9999</u> | |

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|------------|-----------------|--|
| MRC | 9.012 | MINUTIAE AND RIDGE COUNT DATA |
| MRO | 9.023E* | MINUTIA INDEX AND RIDGE COUNT OCTANT 0 (NNNCC) |
| MRO | 9.023F* | MINUTIA INDEX AND RIDGE COUNT OCTANT 1 (NNNCC) |
| MRO | 9.023G* | MINUTIA INDEX AND RIDGE COUNT OCTANT 2 (NNNCC) |
| MRO | 9.023H* | MINUTIA INDEX AND RIDGE COUNT OCTANT 3 (NNNCC) |
| MRO | 9.023I* | MINUTIA INDEX AND RIDGE COUNT OCTANT 4 (NNNCC) |
| MRO | 9.023J* | MINUTIA INDEX AND RIDGE COUNT OCTANT 5 (NNNCC) |
| MRO | 9.023K* | MINUTIA INDEX AND RIDGE COUNT OCTANT 6 (NNNCC) |
| MRO | 9.023L* | MINUTIA INDEX AND RIDGE COUNT OCTANT 7 (NNNCC) |
| MSC | 2.089 | MATCH SCORE |
| MSG | 2.060 | STATUS/ERROR MESSAGE |
| MTD | 9.012D* | MINUTIA TYPE DESIGNATION |
| MXYTHETA | 9.012B* | X, Y, THETA VALUES |
| NAM | 2.064B* | NAME |
| NAM | 2.018 | NAME |
| NAM1 | 2.2001 | NAME-ONE |
| NAM2 | 2.2002 | NAME-TWO |
| NAM3 | 2.2003 | NAME-THREE |
| NAM4 | 2.2004 | NAME-FOUR |
| NAM5 | 2.2005 | NAME-FIVE |
| NCR | 2.079 | NUMBER OF CANDIDATE'S IMAGES RETURNED |
| NDR | 2.098 | NAME OF DESIGNATED REPOSITORY |
| NIR | 2.2010 | NUMBER OF IMAGES REQUESTED |
| NMN | 9.015 | NUMBER OF MINUTIAE |
| NOT | 2.088 | NOTE FIELD |
| NSR | 1.011 | NATIVE SCANNING RESOLUTION |
| NTR | 1.012 | NOMINAL TRANSMITTING RESOLUTION |
| OCA | 2.009 | ORIGINATING AGENCY CASE NUMBER |
| OCP | 2.040 | OCCUPATION |
| OFC | 2.053 | OFFENSE CATEGORY |
| OFR | 9.005 | ORIGINATING FINGERPRINT READING SYSTEM |
| OFR_METHOD | 9.005B* | ORIGINATING FINGERPRINT READER METHOD |
| OFR_NAME | 9.005A* | ORIGINATING FINGERPRINT READER NAME |
| OFR_SUBSYS | 9.005C* | ORIGINATING FINGERPRINT READER SUBSYS |
| ORI | 1.008 | ORIGINATING AGENCY IDENTIFIER |
| ORN | 9.020 | ORIENTATION UNCERTAINTY |
| PAS | 10.023 | PHOTO ACQUISITION SOURCE |
| PAT | 2.034 | PATTERN LEVEL CLASSIFICATIONS |
| PATCL | 2.034B* | PATTERN CLASSIFICATION CODE |

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Formatted: Font: 7 pt, Not Bold, Font color: Black

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|-------------|-----------------|-------------------------------------|
| PCD | 15.005 | PALMPRINT CAPTURE DATE |
| PEN | 2.078 | PENETRATION QUERY RESPONSE |
| PHD | 10.005 | PHOTO DATE |
| PHT | 2.036 | “PHOTO AVAILABLE” INDICATOR |
| PLP | 15.013 | PALMPRINT POSITION |
| POA | 10.021 | POSE OFFSET ANGLE |
| POB | 2.020 | PLACE OF BIRTH |
| POS | 10.020 | SUBJECT POSE |
| PPA | 2.035 | “PALMPRINTS AVAILABLE” INDICATOR |
| <u>PPC</u> | <u>13.015</u> | <u>PRINT POSITION COORDINATES</u> |
| PRI | 2.076 | PRIORITY |
| PRY | 1.006 | TRANSACTION PRIORITY |
| PTD | 2.063 | PERSON TYPE DESIGNATOR |
| PTY | 2.2009 | PHOTO TYPE |
| PUM | 9.021C* | POSITION UNCERTAINTY (RRRR) |
| PUM | 9.022E* | POSITION UNCERTAINTY (RRRR) |
| PXS | 10.022 | PHOTO DESCRIPTION |
| QDD | 2.004 | QUERY DEPTH OF DETAIL |
| QMS | 9.023C* | QUALITY MEASURE |
| RAC | 2.025 | RACE |
| RAE | 17.014 | ROTATION ANGLE OF EYE |
| RAP | 2.070 | REQUEST FOR ELECTRONIC RAP SHEET |
| RAU | 17.015 | ROTATION UNCERTAINTY |
| <u>*tbd</u> | 2.2014 | RAP BACK ELIGIBILITY |
| <u>*tbd</u> | 2.052 | RAP BACK REQUEST |
| <u>*tbd</u> | 2.058 | RAP BACK RECORD OWNER |
| <u>*tbd</u> | 2.2011 | RAP BACK VERIFICATION STATUS |
| RCD1 | 2.091 | RIDGE CORE DELTA ONE FOR SUBPATTERN |
| RCD2 | 2.092 | RIDGE CORE DELTA TWO FOR SUBPATTERN |
| RCN1 | 2.091B* | RIDGE COUNT NUMBER 1 |
| RCN1 | 9.017B* | FIRST SUBPATTERN RIDGE COUNT |
| RCN2 | 2.092B* | RIDGE COUNT NUMBER 2 |
| RCN2 | 9.017C* | SECOND SUBPATTERN RIDGE COUNT |
| RDG | 9.011 | MINUTIAE RIDGE COUNT INDICATOR |
| REC | 2.082 | RESPONSE CODE |
| RES | 2.041 | RESIDENCE OF PERSON FINGERPRINTED |
| RET | 2.005 | RETENTION CODE |
| <u>*tbd</u> | 2.2015 | RAP BACK EXPIRATION DATE |
| RFP | 2.037 | REASON FINGERPRINTED |

Deleted: RBE
 Deleted: RBR
 Deleted: RBRO
 Deleted: RBVS

Deleted: REXP
 Formatted: Font: 7 pt, Not Bold, Font color: Black
 Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"
 Deleted: 002
 Deleted: APRIL 1, 2008
 Formatted: Position: Vertical: 0.01", Relative to: Paragraph
 Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|----------------|------------------|---|
| RFR | 2.095 | REQUEST FEATURES RECORD |
| ROV | 9.018 | REGION OF VALUE POLYGON |
| RPR | 2.096 | REQUEST PHOTO RECORD |
| RSO | 9.023M* | OCTANT RESIDUALS (RRRRRRRR) |
| RSR | 2.065 | REPOSITORY STATISTICS RESPONSE |
| SAN | 2.099 | STATE ARREST NUMBER |
| SCNA | 2.086 | AFIS SEGMENT CONTROL NUMBER |
| <u>SCR</u> | <u>13.004</u> | <u>SOURCE AGENCY/ORI</u> |
| SCO | 2.007 | SEND COPY TO |
| SDOB | 2.2007 | SUBMITTED DATE OF BIRTH |
| SEAL | 2.050 | SEAL ARREST FLAG |
| SEC | 10.027 | SUBJECT EYE COLOR |
| SEG | 14.021 | FINGERPRINT SEGMENT POSITION(S) |
| SERNO | 2.067C* | ORIGINATING FINGERPRINT READING SYSTEM SERIAL |
| SEX | 2.024 | SEX |
| SFP | 10.029 | SUBJECT FEATURE POINTS |
| SHC | 10.028 | SUBJECT HAIR COLOR |
| <u>SHPS</u> | <u>13.016</u> | <u>SCANNED HORIZONTAL SCALE</u> |
| SHPS | 14.016 | SCAN HOR PIXEL SCALE |
| SHPS | 15.016 | SCAN HOR PIXEL SCALE |
| SHPS | 16.016 | SCAN HOR PIXEL SCALE |
| SID | 2.015 | STATE IDENTIFICATION NUMBER |
| SLC | 10.008 | SCALE UNITS |
| <u>SLC</u> | <u>13.008</u> | <u>SCALE UNITS</u> |
| SLC | 14.008 | SCALE UNITS |
| SLC | 15.008 | SCALE UNITS |
| SLC | 16.008 | SCALE UNITS |
| SLC | 17.008 | SCALE UNITS |
| SLE | 2.055 | CUSTODY OR SUPERVISORY STATUS LITERAL |
| SMD | 10.042 | SMT DESCRIPTORS |
| SMS | 10.041 | SCAR/MARK/TATTOO SIZE |
| SMT | 2.026 | SCARS, MARKS, AND TATTOOS |
| SMT | 10.040 | NCIC DESIGNATION CODE |
| SNAM | 2.2008 | SUBMITTED NAME |
| SOC | 2.016 | SOCIAL SECURITY ACCOUNT NUMBER |
| SPA | 10.025 | SUBJECT POSE ANGLES |
| SPCN | 2.093 | SPECIAL POPULATION COGNIZANT FILE NUMBER |
| <u>SPD</u> | <u>13.014</u> | <u>SEARCH POSITION DESCRIPTORS</u> |
| SQM | 14.023 | SEGMENTATION QUALITY METRIC |

Deleted: RSV [63]

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|-------------|-----------------|--|
| SQS | 10.024 | SUBJECT QUALITY SCORE |
| SRC | 10.004 | SOURCE AGENCY/ORI |
| SRC | 14.004 | SOURCE AGENCY/ORI |
| SRC | 15.004 | SOURCE AGENCY/ORI |
| SRC | 16.004 | SOURCE AGENCY/ORI |
| SRC | 17.004 | SOURCE AGENCY/ORI |
| SRC | 99.004 | SOURCE AGENCY/ORI |
| SRF | 2.059 | SEARCH RESULTS FINDINGS |
| SSD | 2.054 | CUSTODY OR SUPERVISORY STATUS - START DATE |
| <u>SVPS</u> | <u>13.017</u> | <u>SCANNED VERTICAL PIXEL SCALE</u> |
| SVPS | 14.017 | SCAN VERT PIXEL SCALE |
| SVPS | 15.017 | SCAN VERT PIXEL SCALE |
| SVPS | 16.017 | SCAN VERT PIXEL SCALE |
| SXS | 10.026 | SUBJECT FACIAL DESCRIPTION |
| TAA | 2.087 | TREAT AS ADULT |
| TCN | 1.009 | TRANSACTION CONTROL NUMBER |
| TCR | 1.010 | TRANSACTION CONTROL REFERENCE |
| THET | 9.019C* | ROTATION ANGLE CW DEGREES (III.FFFF) |
| TOT | 1.004 | TYPE OF TRANSACTION |
| TSR | 2.043 | TYPE OF SEARCH REQUESTED |
| UCN | 2.081 | UNIVERSAL CONTROL NUMBER |
| UDI | 16.003 | USER-DEFINED IMAGE |
| ULF | 2.083 | UNSOLVED LATENT FILE |
| UTD | 16.005 | USER-DEFINED TESTING DATE |
| VEN | 9.016A* | EQUIPMENT |
| VER | 1.002 | VERSION |
| VID | 9.016B* | VERSION IDENTIFIER |
| VLL | 7.007 | VERTICAL LINE LENGTH |
| VLL | 10.007 | VERTICAL LINE LENGTH |
| <u>VLL</u> | <u>13.007</u> | <u>VERTICAL LINE LENGTH</u> |
| VLL | 14.007 | VERTICAL LINE LENGTH |
| VLL | 15.007 | VERTICAL LINE LENGTH |
| VLL | 16.007 | VERTICAL LINE LENGTH |
| VLL | 17.007 | VERTICAL LINE LENGTH |
| VPS | 10.010 | VERTICAL PIXEL SCALE |
| <u>VPS</u> | <u>13.010</u> | <u>VERTICAL PIXEL SCALE</u> |
| VPS | 14.010 | VERTICAL PIXEL SCALE |
| VPS | 15.010 | VERTICAL PIXEL SCALE |
| VPS | 16.010 | VERTICAL PIXEL SCALE |

- Formatted:** Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"
- Formatted:** Font: 7 pt, Not Bold, Font color: Black
- Deleted: 002**
- Deleted: APRIL 1, 2008**
- Formatted:** Position: Vertical: 0.01", Relative to: Paragraph
- Formatted:** Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-1. Complete Element Cross-Reference List by Element ID

| Element ID | EBTS Tag Number | Element Name |
|------------|-----------------|--|
| VPS | 17.010 | VERTICAL PIXEL SCALE |
| WGT | 2.029 | WEIGHT |
| WTR | 2.030 | WEIGHT RANGE |
| XYM | 9.018A* | VERTEX (XXXXXXXX) |
| XYM | 9.021A* | LOCATION (XXXXXXXX) |
| XYM | 9.022A* | LOCATION (XXXXXXXX) |
| XYP | 9.019A* | OFFSET TO UL CORNER SUBIMAGE (XXXXXXXX) |
| XYP | 9.019B* | CENTER OF ROTATION IN SUBIMAGE (XXXXXXXX) |
| XYP | 9.019D* | ROTATION CENTER IN ROTATED SUBIMAGE (XXXXXXXX) |
| XYP | 9.019E* | OFFSET TO UL CORNER FINAL SUBIMAGE (XXXXXXXX) |
| XYT | 9.023B* | LOCATION DIRECTION (XXXXXXXX) |

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Formatted: Font: 7 pt, Not Bold, Font color: Black

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-2. Complete Element Cross-Reference List by Tag Number

Deleted: *Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction¶
 PENDING M TRANSACTION ERROR ME¶

| EBTS Tag Number | Element ID | Element Name |
|-----------------|------------|---------------------------------------|
| 1.001 | LEN | LOGICAL RECORD LENGTH |
| 1.002 | VER | VERSION |
| 1.003 | CNT | FILE CONTENT |
| 1.004 | TOT | TYPE OF TRANSACTION |
| 1.005 | DAT | DATE |
| 1.006 | PRY | TRANSACTION PRIORITY |
| 1.007 | DAI | DESTINATION AGENCY IDENTIFIER |
| 1.008 | ORI | ORIGINATING AGENCY IDENTIFIER |
| 1.009 | TCN | TRANSACTION CONTROL NUMBER |
| 1.010 | TCR | TRANSACTION CONTROL REFERENCE |
| 1.011 | NSR | NATIVE SCANNING RESOLUTION |
| 1.012 | NTR | NOMINAL TRANSMITTING RESOLUTION |
| | | |
| 2.001 | LEN | LOGICAL RECORD LENGTH |
| 2.002 | IDC | IMAGE DESIGNATION CHARACTER |
| 2.003 | FFN | FBI FILE NUMBER |
| 2.004 | QDD | QUERY DEPTH OF DETAIL |
| 2.005 | RET | RETENTION CODE |
| 2.006 | ATN | “ATTENTION” INDICATOR |
| 2.007 | SCO | SEND COPY TO |
| 2.009 | OCA | ORIGINATING AGENCY CASE NUMBER |
| 2.010 | CIN | CONTRIBUTOR CASE IDENTIFIER NUMBER |
| 2.010A* | CIN_PRE | CONTRIBUTOR CASE PREFIX |
| 2.010B* | CIN_ID | CONTRIBUTOR CASE ID |
| 2.011 | CIX | CONTRIBUTOR CASE IDENTIFIER EXTENSION |
| 2.012 | LCN | FBI LATENT CASE NUMBER |
| 2.013 | LCX | FBI LATENT CASE EXTENSION |
| 2.014 | FBI | FBI NUMBER |
| 2.015 | SID | STATE IDENTIFICATION NUMBER |
| 2.016 | SOC | SOCIAL SECURITY ACCOUNT NUMBER |
| 2.017 | MNU | MISCELLANEOUS IDENTIFICATION NUMBER |
| 2.018 | NAM | NAME |
| 2.019 | AKA | ALIASES |
| 2.020 | POB | PLACE OF BIRTH |
| 2.021 | CTZ | COUNTRY OF CITIZENSHIP |
| 2.022 | DOB | DATE OF BIRTH |
| 2.023 | AGR | AGE RANGE |
| 2.024 | SEX | SEX |
| 2.025 | RAC | RACE |

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|------------------|-----------------|--|
| <u>2.026</u> | <u>SMT</u> | <u>SCARS, MARKS, AND TATTOOS</u> |
| <u>2.027</u> | <u>HGT</u> | <u>HEIGHT</u> |
| <u>2.028</u> | <u>HTR</u> | <u>HEIGHT RANGE</u> |
| <u>2.029</u> | <u>WGT</u> | <u>WEIGHT</u> |
| <u>2.030</u> | <u>WTR</u> | <u>WEIGHT RANGE</u> |
| <u>2.031</u> | <u>EYE</u> | <u>COLOR EYES</u> |
| <u>2.032</u> | <u>HAI</u> | <u>HAIR COLOR</u> |
| <u>2.033</u> | <u>FPC</u> | <u>NCIC FINGERPRINT CLASSIFICATION</u> |
| <u>2.034</u> | <u>PAT</u> | <u>PATTERN LEVEL CLASSIFICATIONS</u> |
| <u>2.034A*</u> | <u>FGP</u> | <u>FINGER NUMBER</u> |
| <u>2.034B*</u> | <u>PATCL</u> | <u>PATTERN CLASSIFICATION CODE</u> |
| <u>2.035</u> | <u>PPA</u> | <u>"PALMPRINTS AVAILABLE" INDICATOR</u> |
| <u>2.036</u> | <u>PHT</u> | <u>"PHOTO AVAILABLE" INDICATOR</u> |
| <u>2.037</u> | <u>RFP</u> | <u>REASON FINGERPRINTED</u> |
| 2.038 | DPR | DATE PRINTED |
| 2.039 | EAD | EMPLOYER AND ADDRESS |
| 2.040 | OCF | OCCUPATION |
| 2.041 | RES | RESIDENCE OF PERSON FINGERPRINTED |
| 2.042 | MIL | MILITARY CODE |
| 2.043 | TSR | TYPE OF SEARCH REQUESTED |
| 2.044 | GEO | GEOGRAPHICAL AREA OF SEARCH |
| 2.045 | DOA | DATE OF ARREST |
| 2.046 | DOS | DATE OF ARREST-SUFFIX |
| 2.047 | ASL | ARREST SEGMENT LITERAL |
| 2.047A* | DOO | DATE OF OFFENSE |
| 2.047B* | AOL | ARREST OFFENSE LITERAL |
| 2.048 | CSR | CIVIL SEARCH REQUESTED INDICATOR |
| 2.049 | EID | EMPLOYEE IDENTIFICATION NUMBER |
| <u>2.050</u> | <u>SEAL</u> | <u>SEAL ARREST FLAG</u> |
| 2.051 | CSL | COURT SEGMENT LITERAL |
| 2.051A* | CDD | COURT DISPOSITION DATE |
| 2.051B* | COL | COURT OFFENSE LITERAL |
| 2.051C* | CPL | OTHER COURT SENTENCE PROVISION LITERAL |
| 2.052 | *tbd | RAP BACK REQUEST |
| 2.053 | OFC | OFFENSE CATEGORY |
| 2.054 | SSD | CUSTODY OR SUPERVISORY STATUS - START DATE |
| 2.055 | SLE | CUSTODY OR SUPERVISORY STATUS LITERAL |
| 2.056 | ICO | IDENTIFICATION COMMENTS |
| 2.057 | FNR | FINGER NUMBER(S) REQUESTED |
| <u>2.058</u> | <u>*tbd</u> | <u>RAP BACK RECORD OWNER</u> |

Deleted: 2.025 . RAC . RACE¶
 . 2.026 . SMT . SCARS, MARKS, AND TATTOOS¶
 . 2.027 . HGT . HEIGHT¶
 . 2.028 . HTR . HEIGHT RANGE¶
 . 2.029 . WGT . WEIGHT¶
 . 2.030 . WTR . WEIGHT RANGE¶
 . 2.031 . EYE . COLOR EYES¶
 . 2.032 . HAI . HAIR COLOR¶
 . 2.033 . FPC . NCIC FINGERPRINT CLASSIFICATION¶
 . 2.034 . PAT . PATTERN LEVEL CLASSIFICATIONS¶
 . 2.034A* . FGP . FINGER NUMBER¶
 . 2.034B* . PATCL . PATTERN CLASSIFICATION CODE¶
 . 2.035 . PPA . "PALMPRINTS AVAILABLE" INDICATOR¶
 . 2.036 . PHT . "PHOTO AVAILABLE" INDICATOR¶
 . 2.037 . RFP . REASON FINGERPRINTED¶

Deleted: RBR
Deleted: RBRO
Formatted: Font: 7 pt, Not Bold, Font color: Black
Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"
Deleted: 002
Deleted: APRIL 1, 2008
Formatted: Position: Vertical: 0.01", Relative to: Paragraph
Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|-----------------|--------------|--|
| <u>2.059</u> | <u>SRF</u> | <u>SEARCH RESULTS FINDINGS</u> |
| <u>2.060</u> | <u>MSG</u> | <u>STATUS/ERROR MESSAGE</u> |
| <u>2.061</u> | <u>CST</u> | <u>CASE TITLE</u> |
| <u>2.062</u> | <u>IMT</u> | <u>IMAGE TYPE (IF TYPE -7 IMAGES)</u> |
| <u>2.063</u> | <u>PTD</u> | <u>PERSON TYPE DESIGNATOR</u> |
| <u>2.064</u> | <u>CAN</u> | <u>CANDIDATE LIST</u> |
| <u>2.064A*</u> | <u>FNU</u> | <u>FBI NUMBER</u> |
| <u>2.064B*</u> | <u>NAM</u> | <u>NAME</u> |
| <u>2.065</u> | <u>RSR</u> | <u>REPOSITORY STATISTICS RESPONSE</u> |
| <u>2.066</u> | <u>IFS</u> | <u>IDENTIFICATION FIREARMS SALES</u> |
| <u>2.067</u> | <u>IMA</u> | <u>IMAGE CAPTURE EQUIPMENT</u> |
| <u>2.067A*</u> | <u>MAK</u> | <u>ORIGINATING FINGERPRINT READING SYSTEM MAKE</u> |
| <u>2.067B*</u> | <u>MODL</u> | <u>ORIGINATING FINGERPRINT READING SYSTEM MODEL</u> |
| <u>2.067C*</u> | <u>SERNO</u> | <u>ORIGINATING FINGERPRINT READING SYSTEM SERIAL</u> |
| <u>2.069</u> | <u>ETC</u> | <u>ESTIMATED TIME TO COMPLETE</u> |
| <u>2.070</u> | <u>RAP</u> | <u>REQUEST FOR ELECTRONIC RAP SHEET</u> |
| <u>2.071</u> | <u>ACN</u> | <u>ACTION TO BE TAKEN</u> |
| <u>2.072</u> | <u>FIU</u> | <u>FINGERPRINT IMAGE(S) UPDATED</u> |
| <u>2.073</u> | <u>CRI</u> | <u>CONTROLLING AGENCY IDENTIFIER</u> |
| <u>2.074</u> | <u>FGP</u> | <u>FINGER POSITION</u> |
| <u>2.075</u> | <u>ERS</u> | <u>ELECTRONIC RAP SHEET</u> |
| <u>2.076</u> | <u>PRI</u> | <u>PRIORITY</u> |
| <u>2.077</u> | <u>CFS</u> | <u>CANCEL FP SEARCH</u> |
| <u>2.078</u> | <u>PEN</u> | <u>PENETRATION QUERY RESPONSE</u> |
| <u>2.079</u> | <u>NCR</u> | <u>NUMBER OF CANDIDATE'S IMAGES RETURNED</u> |
| <u>2.080</u> | <u>EXP</u> | <u>RESPONSE EXPLANATION</u> |
| <u>2.081</u> | <u>UCN</u> | <u>UNIVERSAL CONTROL NUMBER</u> |
| <u>2.082</u> | <u>REC</u> | <u>RESPONSE CODE</u> |
| <u>2.083</u> | <u>ULF</u> | <u>UNSOLVED LATENT FILE</u> |
| <u>2.084</u> | <u>AMP</u> | <u>AMPUTATED OR BANDAGED</u> |
| <u>2.084A*</u> | <u>FGP</u> | <u>FINGER NUMBER</u> |
| <u>2.084B*</u> | <u>AMPCD</u> | <u>AMPUTATED OR BANDAGED CODE</u> |
| <u>2.085</u> | <u>CRN</u> | <u>CIVIL RECORD NUMBER</u> |
| <u>2.086</u> | <u>SCNA</u> | <u>AFIS SEGMENT CONTROL NUMBER</u> |
| <u>2.087</u> | <u>TAA</u> | <u>TREAT AS ADULT</u> |
| <u>2.088</u> | <u>NOT</u> | <u>NOTE FIELD</u> |
| <u>2.089</u> | <u>MSC</u> | <u>MATCH SCORE</u> |
| <u>2.091</u> | <u>RCD1</u> | <u>RIDGE CORE DELTA ONE FOR SUBPATTERN</u> |
| <u>2.091A*</u> | <u>FGP</u> | <u>FINGER NUMBER</u> |
| <u>2.091B*</u> | <u>RCN1</u> | <u>RIDGE COUNT NUMBER 1</u> |

Deleted: . 2.059 . SRF . SEARCH RESULTS FINDINGS¶
 . 2.060 . MSG . STATUS/ERROR MESSAGE¶
 . 2.061 . CST . CASE TITLE¶
 . 2.062 . IMT . IMAGE TYPE (IF TYPE -7 IMAGES)¶
 . 2.063 . PTD . PERSON TYPE DESIGNATOR¶
 . 2.064 . CAN . CANDIDATE LIST¶
 . 2.064A* . FNU . FBI NUMBER¶
 . 2.064B* . NAM . NAME¶
 . 2.065 . RSR . REPOSITORY STATISTICS RESPONSE¶
 . 2.067 . IMA . IMAGE CAPTURE EQUIPMENT¶
 . 2.067A* . MAK . ORIGINATING FINGERPRINT READING SYSTEM MAKE¶
 . 2.067B* . MODL . ORIGINATING FINGERPRINT READING SYSTEM MODEL¶
 . 2.067C* . SERNO . ORIGINATING FINGERPRINT READING SYSTEM SERIAL ¶
 . 2.069 . ETC . ESTIMATED TIME TO COMPLETE¶
 . 2.070 . RAP . REQUEST FOR ELECTRONIC RAP SHEET¶
 . 2.071 . ACN . ACTION TO BE TAKEN¶
 . 2.072 . FIU . FINGERPRINT IMAGE(S) UPDATED¶
 . 2.073 . CRI . CONTROLLING AGENCY IDENTIFIER¶
 . 2.074 . FGP . FINGER POSITION¶
 . 2.075 . ERS . ELECTRONIC RAP SHEET¶
 . 2.076 . PRI . PRIORITY¶
 . 2.077 . CFS . CANCEL FP SEARCH¶
 . 2.078 . PEN . PENETRATION QUERY RESPONSE¶
 . 2.079 . NCR . NUMBER OF CANDIDATE'S IMAGES RETURNED¶
 . 2.080 . EXP . RESPONSE EXPLANATION¶
 . 2.081 . UCN . UNIVERSAL CONTROL NUMBER¶
 . 2.082 . REC . RESPONSE CODE¶
 . 2.083 . ULF . UNSOLVED LATENT FILE¶

Formatted: Font: 7 pt, Not Bold, Font color: Black
Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"
Deleted: 002
Deleted: APRIL 1, 2008
Formatted: Position: Vertical: 0.01", Relative to: Paragraph
Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction.

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name | |
|---|-------------|---|---------------|
| <u>2.092</u> | <u>RCD2</u> | <u>RIDGE CORE DELTA TWO FOR SUBPATTERN</u> | |
| <u>2.092A*</u> | <u>FGP</u> | <u>FINGER NUMBER</u> | |
| <u>2.092B*</u> | <u>RCN2</u> | <u>RIDGE COUNT NUMBER 2</u> | |
| <u>2.093</u> | <u>SPCN</u> | <u>SPECIAL POPULATION COGNIZANT FILE NUMBER</u> | |
| <u>2.094</u> | <u>CCN</u> | <u>COURT CASE NUMBER</u> | |
| <u>2.095</u> | <u>RFR</u> | <u>REQUEST FEATURES RECORD</u> | |
| <u>2.096</u> | <u>RPR</u> | <u>REQUEST PHOTO RECORD</u> | |
| <u>2.098</u> | <u>NDR</u> | <u>NAME OF DESIGNATED REPOSITORY</u> | |
| <u>2.099</u> | <u>SAN</u> | <u>STATE ARREST NUMBER</u> | |
| <u>2.2001</u> | <u>NAM1</u> | <u>NAME-ONE</u> | |
| <u>2.2002</u> | <u>NAM2</u> | <u>NAME-TWO</u> | |
| <u>2.2003</u> | <u>NAM3</u> | <u>NAME-THREE</u> | |
| <u>2.2004</u> | <u>NAM4</u> | <u>NAME-FOUR</u> | |
| <u>2.2005</u> | <u>NAM5</u> | <u>NAME-FIVE</u> | |
| <u>2.2006</u> | <u>CSF</u> | <u>CASCADED SEARCH FLAG</u> | |
| <u>2.2007</u> | <u>SDOB</u> | <u>SUBMITTED DATE OF BIRTH</u> | |
| <u>2.2008</u> | <u>SNAM</u> | <u>SUBMITTED NAME</u> | |
| <u>2.2009</u> | <u>PTY</u> | <u>PHOTO TYPE</u> | |
| <u>2.2010</u> | <u>NIR</u> | <u>NUMBER OF IMAGES REQUESTED</u> | |
| <u>2.2011</u> | <u>*tbd</u> | <u>RAP BACK VERIFICATION STATUS</u> | Deleted: RBVS |
| <u>2.2012</u> | <u>IIR</u> | <u>IRIS IMAGES REQUESTED</u> | |
| <u>2.2013</u> | <u>DMI</u> | <u>DISPOSITION MAINTENANCE INDICATOR</u> | |
| <u>2.2014</u> | <u>*tbd</u> | <u>RAP BACK ELIGIBILITY</u> | Deleted: RBE |
| <u>2.2015</u> | <u>*tbd</u> | <u>RAP BACK EXPIRATION DATE</u> | Deleted: REXP |
| <u>2.2016</u> | <u>DNAF</u> | <u>DNA FLAG</u> | |
| <u>2.2017</u> | <u>DORI</u> | <u>DNA LOCATION</u> | |
| <u>2.2018</u> | <u>DNAC</u> | <u>DNA CODIS FLAG</u> | |
| | | | |
| <u>7.001</u> | <u>LEN</u> | <u>LOGICAL RECORD LENGTH</u> | |
| <u>7.002</u> | <u>IDC</u> | <u>IMAGE DESIGNATION CHARACTER</u> | |
| <u>7.003</u> | <u>IMP</u> | <u>IMPRESSION TYPE</u> | |
| <u>7.004</u> | <u>FGP</u> | <u>FINGER POSITION</u> | |
| <u>7.005</u> | <u>ISR</u> | <u>IMAGE SCANNING RESOLUTION</u> | |
| <u>7.006</u> | <u>HLL</u> | <u>HORIZONTAL LINE LENGTH</u> | |
| <u>7.007</u> | <u>VLL</u> | <u>VERTICAL LINE LENGTH</u> | |
| <u>7.008</u> | <u>GCA</u> | <u>GRAYSCALE COMPRESSION ALGORITHM</u> | |
| <u>7.009</u> | <u>IMG</u> | <u>IMAGE DATA</u> | |
| | | | |
| <u>9.001</u> | <u>LEN</u> | <u>LOGICAL RECORD LENGTH</u> | |
| <u>9.002</u> | <u>IDC</u> | <u>IMAGE DESIGNATION CHARACTER</u> | |
| | | | |
| *Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction | | | |
| IAFIS-DOC-01078-8.1 | L-15 | XXXXX 99, 9999* | |

Deleted: RBVS

Deleted: RBE

Deleted: REXP

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|-----------------|-------------------|---|
| <u>9.003</u> | <u>IMP</u> | <u>IMPRESSION TYPE</u> |
| <u>9.004</u> | <u>FMT</u> | <u>MINUTIAE FORMAT</u> |
| <u>9.005</u> | <u>OFR</u> | <u>ORIGINATING FINGERPRINT READING SYSTEM</u> |
| <u>9.005A*</u> | <u>OFR_NAME</u> | <u>ORIGINATING FINGERPRINT READER NAME</u> |
| <u>9.005B*</u> | <u>OFR_METHOD</u> | <u>ORIGINATING FINGERPRINT READER METHOD</u> |
| <u>9.005C*</u> | <u>OFR_SUBSYS</u> | <u>ORIGINATING FINGERPRINT READER SUBSYS</u> |
| <u>9.006</u> | <u>FGP</u> | <u>FINGER POSITION</u> |
| <u>9.007</u> | <u>FPC</u> | <u>FINGERPRINT PATTERN CLASSIFICATION</u> |
| <u>9.008</u> | <u>CRP</u> | <u>CORE POSITION</u> |
| <u>9.009</u> | <u>DLT</u> | <u>DELTA POSITION</u> |
| <u>9.011</u> | <u>RDG</u> | <u>MINUTIAE RIDGE COUNT INDICATOR</u> |
| <u>9.012</u> | <u>MRC</u> | <u>MINUTIAE AND RIDGE COUNT DATA</u> |
| <u>9.012A*</u> | <u>MDX</u> | <u>INDEX NUMBER</u> |
| <u>9.012B*</u> | <u>MXYTHETA</u> | <u>X, Y, THETA VALUES</u> |
| <u>9.012C*</u> | <u>MQUAL</u> | <u>QUALITY MEASURE</u> |
| <u>9.012D*</u> | <u>MTD</u> | <u>MINUTIA TYPE DESIGNATION</u> |
| <u>9.012E*</u> | <u>MCOUNT</u> | <u>RIDGE COUNT DATA</u> |
| <u>9.013</u> | <u>AFV</u> | <u>AFIS FEATURE VECTOR</u> |
| <u>9.014</u> | <u>FGN</u> | <u>FINGER NUMBER</u> |
| <u>9.015</u> | <u>NMN</u> | <u>NUMBER OF MINUTIAE</u> |
| <u>9.016</u> | <u>FPC</u> | <u>FINGERPRINT CHARACTERIZATION PROCESS</u> |
| <u>9.016A*</u> | <u>VEN</u> | <u>EQUIPMENT</u> |
| <u>9.016B*</u> | <u>VID</u> | <u>VERSION IDENTIFIER</u> |
| <u>9.016C*</u> | <u>MET</u> | <u>METHOD</u> |
| <u>9.017</u> | <u>APC</u> | <u>AFIS/FBI PATTERN CLASSIFICATION</u> |
| <u>9.017A*</u> | <u>APAT</u> | <u>PATTERN CLASSIFICATION</u> |
| <u>9.017B*</u> | <u>RCN1</u> | <u>FIRST SUBPATTERN RIDGE COUNT</u> |
| <u>9.017C*</u> | <u>RCN2</u> | <u>SECOND SUBPATTERN RIDGE COUNT</u> |
| <u>9.018</u> | <u>ROV</u> | <u>REGION OF VALUE POLYGON</u> |
| <u>9.018A*</u> | <u>XYM</u> | <u>VERTEX (XXXXYYYY)</u> |
| <u>9.019</u> | <u>COF</u> | <u>COORDINATE OFFSETS</u> |
| <u>9.019A*</u> | <u>XYP</u> | <u>OFFSET TO UL CORNER SUBIMAGE (XXXXYYYY)</u> |
| <u>9.019B*</u> | <u>XYP</u> | <u>CENTER OF ROTATION IN SUBIMAGE (XXXXYYYY)</u> |
| <u>9.019C*</u> | <u>THET</u> | <u>ROTATION ANGLE CW DEGREES (IILFFFF)</u> |
| <u>9.019D*</u> | <u>XYP</u> | <u>ROTATION CENTER IN ROTATED SUBIMAGE (XXXXYYYY)</u> |
| <u>9.019E*</u> | <u>XYP</u> | <u>OFFSET TO UL CORNER FINAL SUBIMAGE (XXXXYYYY)</u> |
| <u>9.020</u> | <u>ORN</u> | <u>ORIENTATION UNCERTAINTY</u> |
| <u>9.021</u> | <u>CRA</u> | <u>CORE ATTRIBUTES</u> |
| <u>9.021A*</u> | <u>XYM</u> | <u>LOCATION (XXXXYYYY)</u> |
| <u>9.021B*</u> | <u>DID</u> | <u>DIRECTION IN DEGREES (DDD)</u> |

Deleted: . 7.01 . LEN . LOGICAL RECORD LENGTH¶
 . 7.02 . IDC . IMAGE DESIGNATION CHARACTER¶
 . 7.03 . IMP . IMPRESSION TYPE¶
 . 7.04 . FGP . FINGER POSITION¶
 . 7.05 . ISR . IMAGE SCANNING RESOLUTION¶
 . 7.06 . HLL . HORIZONTAL LINE LENGTH¶
 . 7.07 . VLL . VERTICAL LINE LENGTH¶
 . 7.08 . GCA . GRAYSCALE COMPRESSION ALGORITHM¶
 . 7.99 . IMG . IMAGE DATA¶
 . 9.001 . LEN . LOGICAL RECORD LENGTH¶
 . 9.002 . IDC . IMAGE DESIGNATION CHARACTER¶
 . 9.003 . IMP . IMPRESSION TYPE¶
 . 9.004 . FMT . MINUTIAE FORMAT¶

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|-------------------------|---------------------|---|
| 9.021C* | PUM | POSITION UNCERTAINTY (RRRR) |
| 9.022 | DLA | DELTA ATTRIBUTES |
| 9.022A* | XYM | LOCATION (XXXXYYYY) |
| 9.022B* | DID | UPWARD FLOW DIRECTION (DDD) |
| 9.022C* | DID | LEFTWARD FLOW DIRECTION (DDD) |
| 9.022D* | DID | RIGHTWARD FLOW DIRECTION (DDD) |
| 9.022E* | PUM | POSITION UNCERTAINTY (RRRR) |
| 9.023 | MAT | MINUTIAE AND RIDGE COUNT DATA |
| 9.023A* | MDX | MINUTIAE INDEX NUMBER (III) |
| 9.023B* | XYT | LOCATION DIRECTION (XXXXYYYY) |
| 9.023C* | QMS | QUALITY MEASURE |
| 9.023D* | MNT | MINUTIA TYPE |
| 9.023E* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 0 (NNCC) |
| 9.023F* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 1 (NNCC) |
| 9.023G* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 2 (NNCC) |
| 9.023H* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 3 (NNCC) |
| 9.023I* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 4 (NNCC) |
| 9.023J* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 5 (NNCC) |
| 9.023K* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 6 (NNCC) |
| 9.023L* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 7 (NNCC) |
| 9.023M* | RSO | OCTANT RESIDUALS (RRRRRRR) |
| 9.024 | CHQ | CHARACTERIZATION QUALITY |
| 9.025 | CLQ | CLASSIFIER QUALITY |
| 10.001 | LEN | LOGICAL RECORD LENGTH |
| 10.002 | IDC | IMAGE DESIGNATION CHARACTER |
| 10.003 | IMT | IMAGE TYPE |
| 10.004 | SRC | SOURCE AGENCY/ORI |
| 10.005 | PHD | PHOTO DATE |
| 10.006 | HLL | HORIZONTAL LINE LENGTH |
| 10.007 | VLL | VERTICAL LINE LENGTH |
| 10.008 | SLC | SCALE UNITS |
| 10.009 | HPS | HORIZONTAL PIXEL SCALE |
| 10.010 | VPS | VERTICAL PIXEL SCALE |
| 10.011 | CGA | COMPRESSION ALGORITHM |
| 10.012 | CSP | COLOR SPACE |
| 10.020 | POS | SUBJECT POSE |
| 10.021 | POA | POSE OFFSET ANGLE |
| 10.022 | PXS | PHOTO DESCRIPTION |
| 10.023 | PAS | PHOTO ACQUISITION SOURCE |

Deleted: . 9.012 . MRC . MINUTIAE AND RIDGE COUNT DATA¶
 . 9.012A* . MDX . INDEX NUMBER¶
 . 9.012B* . MXYTHETA . X, Y, THETA VALUES¶
 . 9.012C* . MQUAL . QUALITY MEASURE¶
 . 9.012D* . MTD . MINUTIA TYPE DESIGNATION¶
 . 9.012E* . MCOUNT . RIDGE COUNT DATA¶
 . 9.013 . AFV . AFIS FEATURE VECTOR¶
 . 9.014 . FGN . FINGER NUMBER¶
 . 9.015 . NMN . NUMBER OF MINUTIAE¶
 . 9.016 . FCP . FINGERPRINT CHARACTERIZATION PROCESS¶
 . 9.016A* . VEN . EQUIPMENT¶
 . 9.016B* . VID . VERSION IDENTIFIER¶
 . 9.016C* . MET . METHOD¶
 . 9.017 . APC . AFIS/FBI PATTERN CLASSIFICATION¶
 . 9.017A* . APAT . PATTERN CLASSIFICATION¶
 . 9.017B* . RCN1 . FIRST SUBPATTERN RIDGE COUNT¶
 . 9.017C* . RCN2 . SECOND SUBPATTERN RIDGE COUNT¶
 . 9.018 . ROV . REGION OF VALUE POLYGON¶
 . 9.018A* . XYM . VERTEX (XXXXYYYY)¶
 . 9.019 . COF . COORDINATE OFFSETS¶
 . 9.019A* . XYP . OFFSET TO UL CORNER SUBIMAGE (XXXXYYYY)¶
 . 9.019B* . XYP . CENTER OF ROTATION IN SUBIMAGE (XXXXYYYY)¶
 . 9.019C* . THET . ROTATION ANGLE CW DEGREES (IIIFFF)¶
 . 9.019D* . XYP . ROTATION CENTER IN ROTATED SUBIMAGE (XXXXYYYY)¶
 . 9.019E* . XYP . OFFSET TO UL CORNER FINAL SUBIMAGE (XXXXYYYY)¶
 . 9.020 . ORN . ORIENTATION UNCERTAINTY¶
 . 9.021 . CRA . CORE ATTRIBUTES¶
 . 9.021A* . XYM . LOCATION (XXXXYYYY)¶

- Deleted:
- Formatted: Font: 7 pt, Not Bold, Font color: Black
- Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"
- Deleted: 002
- Deleted: APRIL 1, 2008
- Formatted: Position: Vertical: 0.01", Relative to: Paragraph
- Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction.

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|-----------------|-------------|---------------------------------------|
| <u>10.024</u> | <u>SQS</u> | <u>SUBJECT QUALITY SCORE</u> |
| <u>10.025</u> | <u>SPA</u> | <u>SUBJECT POSE ANGLES</u> |
| <u>10.026</u> | <u>SXS</u> | <u>SUBJECT FACIAL DESCRIPTION</u> |
| <u>10.027</u> | <u>SEC</u> | <u>SUBJECT EYE COLOR</u> |
| <u>10.028</u> | <u>SHC</u> | <u>SUBJECT HAIR COLOR</u> |
| <u>10.029</u> | <u>SFP</u> | <u>SUBJECT FEATURE POINTS</u> |
| <u>10.030</u> | <u>DMM</u> | <u>DEVICE MONITORING MODE</u> |
| <u>10.040</u> | <u>SMT</u> | <u>NCIC DESIGNATION CODE</u> |
| <u>10.041</u> | <u>SMS</u> | <u>SCAR/MARK/TATTOO SIZE</u> |
| <u>10.042</u> | <u>SMD</u> | <u>SMT DESCRIPTORS</u> |
| <u>10.043</u> | <u>COL</u> | <u>COLORS PRESENT</u> |
| <u>10.999</u> | <u>DAT</u> | <u>IMAGE DATA</u> |
| ▲----- | | |
| <u>13.001</u> | <u>LEN</u> | <u>LOGICAL RECORD LENGTH</u> |
| <u>13.002</u> | <u>IDC</u> | <u>IMAGE DESIGNATION CHARACTER</u> |
| <u>13.003</u> | <u>IMP</u> | <u>IMPRESSION TYPE</u> |
| <u>13.004</u> | <u>SRC</u> | <u>SOURCE AGENCY/ORI</u> |
| <u>13.005</u> | <u>LCD</u> | <u>LATENT CAPTURE DATE</u> |
| <u>13.006</u> | <u>HLL</u> | <u>HORIZONTAL LINE LENGTH</u> |
| <u>13.007</u> | <u>VLL</u> | <u>VERTICAL LINE LENGTH</u> |
| <u>13.008</u> | <u>SLC</u> | <u>SCALE UNITS</u> |
| <u>13.009</u> | <u>HPS</u> | <u>HORIZONTAL PIXEL SCALE</u> |
| <u>13.010</u> | <u>VPS</u> | <u>VERTICAL PIXEL SCALE</u> |
| <u>13.011</u> | <u>CGA</u> | <u>COMPRESSION ALGORITHM</u> |
| <u>13.012</u> | <u>BPX</u> | <u>BITS PER PIXEL</u> |
| <u>13.013</u> | <u>FGP</u> | <u>FINGER/PALM POSITION</u> |
| <u>13.014</u> | <u>SPD</u> | <u>SEARCH POSITION DESCRIPTORS</u> |
| <u>13.015</u> | <u>PPC</u> | <u>PRINT POSITION COORDINATES</u> |
| <u>13.016</u> | <u>SHPS</u> | <u>SCANNED HORIZONTAL PIXEL SCALE</u> |
| <u>13.017</u> | <u>SVPS</u> | <u>SCANNED VERTICAL PIXEL SCALE</u> |
| <u>13.020</u> | <u>COM</u> | <u>COMMENT</u> |
| <u>13.024</u> | <u>LQM</u> | <u>LATENT QUALITY METRIC</u> |
| <u>13.999</u> | <u>DAT</u> | <u>IMAGE DATA</u> |
| ▲----- | | |
| <u>14.001</u> | <u>LEN</u> | <u>LOGICAL RECORD LENGTH</u> |
| <u>14.002</u> | <u>IDC</u> | <u>IMAGE DESIGNATION CHARACTER</u> |
| <u>14.003</u> | <u>IMP</u> | <u>IMPRESSION TYPE</u> |
| <u>14.004</u> | <u>SRC</u> | <u>SOURCE AGENCY/ORI</u> |
| <u>14.005</u> | <u>LCD</u> | <u>TENPRINT CAPTURE DATE</u> |
| <u>14.006</u> | <u>HLL</u> | <u>HORIZONTAL LINE LENGTH</u> |

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction.

Formatted: Font: Times New Roman

Deleted: 9.023K MRO MINUTIA INDEX AND RIDGE COUNT OCTANT 6 (NNCC)¶

9.023L MRO MINUTIA INDEX AND RIDGE COUNT OCTANT 7 (NNCC)¶

9.023M RSO OCTANT RESIDUALS (RRRRRRR)¶

9.024 CHQ CHARACTERIZATION QUALITY¶

9.025 CLQ CLASSIFIER QUALITY¶

10.001 LEN LOGICAL RECORD LENGTH¶

10.002 IDC IMAGE DESIGNATION CHARACTER¶

10.003 IMT IMAGE TYPE¶

10.004 SRC SOURCE AGENCY/ORI¶

10.005 PHD PHOTO DATE¶

10.006 HLL HORIZONTAL LINE LENGTH¶

10.007 VLL VERTICAL LINE LENGTH¶

10.008 SLC SCALE UNITS¶

10.009 HPS HORIZONTAL PIXEL SCALE¶

10.010 VPS VERTICAL PIXEL SCALE¶

10.011 CGA COMPRESSION ALGORITHM¶

[65]

Formatted: Font: Times New Roman

Formatted [66]

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002...APRIL 1, 2008 [67]

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|-----------------|------------|--------------------------------------|
| 14.007 | VLL | VERTICAL LINE LENGTH |
| 14.008 | SLC | SCALE UNITS |
| 14.009 | HPS | HORIZONTAL PIXEL SCALE |
| 14.010 | VPS | VERTICAL PIXEL SCALE |
| 14.011 | CGA | COMPRESSION ALGORITHM |
| 14.012 | BPX | BITS PER PIXEL |
| 14.013 | FGP | FINGER POSITION |
| 14.014 | MCL | MAJOR CASE PRINT |
| 14.015 | MCS | MAJOR CASE PRINT SEGMENT POSITION(S) |
| 14.016 | SHPS | SCAN HOR PIXEL SCALE |
| 14.017 | SVPS | SCAN VERT PIXEL SCALE |
| 14.020 | COM | COMMENT |
| 14.021 | SEG | FINGERPRINT SEGMENT POSITION(S) |
| 14.022 | IQM | IMAGE QUALITY METRIC |
| 14.023 | SQM | SEGMENTATION QUALITY METRIC |
| 14.024 | AFM | ALTERNATE FINGERPRINT QUALITY METRIC |
| 14.030 | DMM | DEVICE MONITORING MODE |
| 14.999 | DAT | IMAGE DATA |

Deleted: 0

| | | |
|---------------|-------------|---|
| <u>15.001</u> | <u>LEN</u> | <u>LOGICAL RECORD LENGTH</u> |
| <u>15.002</u> | <u>IDC</u> | <u>IMAGE DESIGNATION CHARACTER</u> |
| <u>15.003</u> | <u>IMP</u> | <u>IMPRESSION TYPE</u> |
| <u>15.004</u> | <u>SRC</u> | <u>SOURCE AGENCY/ORI</u> |
| <u>15.005</u> | <u>PCD</u> | <u>PALMPRINT CAPTURE DATE</u> |
| <u>15.006</u> | <u>HLL</u> | <u>HORIZONTAL LINE LENGTH</u> |
| <u>15.007</u> | <u>VLL</u> | <u>VERTICAL LINE LENGTH</u> |
| <u>15.008</u> | <u>SLC</u> | <u>SCALE UNITS</u> |
| <u>15.009</u> | <u>HPS</u> | <u>HORIZONTAL PIXEL SCALE</u> |
| <u>15.010</u> | <u>VPS</u> | <u>VERTICAL PIXEL SCALE</u> |
| <u>15.011</u> | <u>CGA</u> | <u>COMPRESSION ALGORITHM</u> |
| <u>15.012</u> | <u>BPX</u> | <u>BITS PER PIXEL</u> |
| <u>15.013</u> | <u>PLP</u> | <u>PALMPRINT POSITION</u> |
| <u>15.016</u> | <u>SHPS</u> | <u>SCAN HOR PIXEL SCALE</u> |
| <u>15.017</u> | <u>SVPS</u> | <u>SCAN VERT PIXEL SCALE</u> |
| <u>15.020</u> | <u>COM</u> | <u>COMMENT</u> |
| <u>15.024</u> | <u>APM</u> | <u>ALTERNATE PALMPRINT QUALITY METRIC</u> |
| <u>15.030</u> | <u>DMM</u> | <u>DEVICE MONITORING MODE</u> |
| <u>15.999</u> | <u>DAT</u> | <u>IMAGE DATA</u> |

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

| | | |
|---------------|------------|------------------------------|
| <u>16.001</u> | <u>LEN</u> | <u>LOGICAL RECORD LENGTH</u> |
|---------------|------------|------------------------------|

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

IAFIS-DOC-01078-8.1

L-19

XXXXX 99, 9999

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|-----------------|------------|------------------------------------|
| <u>16.002</u> | <u>IDC</u> | <u>IMAGE DESIGNATION CHARACTER</u> |
| <u>16.003</u> | <u>UDI</u> | <u>USER-DEFINED IMAGE</u> |
| <u>16.004</u> | <u>SRC</u> | <u>SOURCE AGENCY/ORI</u> |
| <u>16.005</u> | <u>UTD</u> | <u>USER-DEFINED TESTING DATE</u> |
| <u>16.006</u> | <u>HLL</u> | <u>HORIZONTAL LINE LENGTH</u> |
| <u>16.007</u> | <u>VLL</u> | <u>VERTICAL LINE LENGTH</u> |
| <u>16.008</u> | <u>SLC</u> | <u>SCALE UNITS</u> |
| <u>16.009</u> | <u>HPS</u> | <u>HORIZONTAL PIXEL SCALE</u> |
| 16.010 | VPS | VERTICAL PIXEL SCALE |
| 16.011 | CGA | COMPRESSION ALGORITHM |
| 16.012 | BPX | BITS PER PIXEL |
| 16.013 | CSP | COLOR SPACE |
| 16.016 | SHPS | SCAN HOR PIXEL SCALE |
| 16.017 | SVPS | SCAN VERT PIXEL SCALE |
| 16.020 | COM | COMMENT |
| 16.030 | DMM | DEVICE MONITORING MODE |
| <u>16.999</u> | <u>DAT</u> | <u>IMAGE DATA</u> |
| <u>17.001</u> | <u>LEN</u> | <u>LOGICAL RECORD LENGTH</u> |
| 17.002 | IDC | IMAGE DESIGNATION CHARACTER |
| 17.003 | FID | FEATURE IDENTIFIER |
| 17.004 | SRC | SOURCE AGENCY/ORI |
| 17.005 | IRD | IRIS CAPTURE DATE |
| 17.006 | HLL | HORIZONTAL LINE LENGTH |
| 17.007 | VLL | VERTICAL LINE LENGTH |
| 17.008 | SLC | SCALE UNITS |
| 17.009 | HPS | HORIZONTAL PIXEL SCALE |
| 17.010 | VPS | VERTICAL PIXEL SCALE |
| 17.011 | CGA | COMPRESSION ALGORITHM |
| 17.012 | BPX | BITS PER PIXEL |
| 17.013 | CSP | COLOR SPACE |
| 17.014 | RAE | ROTATION ANGLE OF EYE |
| 17.015 | RAU | ROTATION UNCERTAINTY |
| 17.016 | IPC | IMAGE PROPERTY CODE |
| 17.017 | DUI | DEVICE UNIQUE IDENTIFIER |
| 17.018 | GUI | GLOBAL UNIQUE IDENTIFIER |
| 17.019 | MMS | MAKE/MODEL/SERIAL NUMBER |
| 17.020 | ECL | EYE COLOR |
| 17.024 | IQS | IMAGE QUALITY SCORE |
| 17.030 | DMM | DEVICE MONITORING MODE |

*Note: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction

Deleted: Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|-----------------|------------|------------------------------------|
| 15.001 | LEN | LOGICAL RECORD LENGTH |
| 15.002 | IDC | IMAGE DESIGNATION CHARACTER |
| 15.003 | IMP | IMPRESSION TYPE |
| 15.004 | SRC | SOURCE AGENCY/ORI |
| 15.005 | PCD | PALMPRINT CAPTURE DATE |
| 15.006 | HLL | HORIZONTAL LINE LENGTH |
| 15.007 | VLL | VERTICAL LINE LENGTH |
| 15.008 | SLC | SCALE UNITS |
| 15.009 | HPS | HORIZONTAL PIXEL SCALE |
| 15.010 | VPS | VERTICAL PIXEL SCALE |
| 15.011 | CGA | COMPRESSION ALGORITHM |
| 15.012 | BPX | BITS PER PIXEL |
| 15.013 | PLP | PALMPRINT POSITION |
| 15.016 | SHPS | SCAN HOR PIXEL SCALE |
| 15.017 | SVPS | SCAN VERT PIXEL SCALE |
| 15.020 | COM | COMMENT |
| 15.024 | APM | ALTERNATE PALMPRINT QUALITY METRIC |
| 15.030 | DMM | DEVICE MONITORING MODE |
| 15.099 | DAT | IMAGE DATA |

NOTE: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction.

16.001 . LEN . LOGICAL RECORD LENGTH

Deleted: 0

Deleted: *NOTE: The alpha suffixes shown here on EBTS tags are only to identify subfields. They must never be used in message construction.
Table L-2. Complete Element Cross-Reference List by Tag Number

Formatted: Font: 7 pt, Not Bold, Font color: Black

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Deleted: 002

Deleted: APRIL 1, 2008

Formatted: Position: Vertical: 0.01", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6.38"

Table L-3. Record Set Requirements Summary by Type of Transaction

| Transaction | Ref | TOT | T1 | T2 | T4* /14 | T7 /13 | T9 | T10 | T15 /17** | Normal Response | Delayed Response | Error Response |
|---|-----------------|-------------|----------|----------|-------------|------------|----------|------------|----------------|--------------------|---------------------|---|
| Fingerprint Identification Submissions | | | | | | | | | | | | |
| CRIMINAL TENPRINT SUBMISSION - ANSWER REQUIRED | 3.1.1.1 | CAR | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | SRE, ULM | Deleted: RBHN, |
| CRIMINAL TENPRINT SUBMISSION - NO ANSWER REQUIRED | 3.1.1.2 | CNA | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | None | ULM | Deleted: RBHN, |
| CRIMINAL FINGERPRINT CARD DIRECT ROUTE | 3.1.1.3 | CPDR | 1 | 1 | 1-14 | 0 | 0 | 0-4 | 0-8/0-2 | SRE | ULM | ERRT |
| CRIMINAL NON-URGENT FINGERPRINT CARD | 3.1.1.4 | CPNU | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | ULM | ERRT |
| DOCUMENT ORDER CHANNELING ELECTRONIC | 3.1.1.5 | DOCE | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | Deleted: (Future Capability) |
| ELECTRONIC DISPOSITION REPORTING (Future Capability) | 3.1.1.6 | DSPE | 1 | 1 | 0-14 | 0 | 0 | 0 | 0/0 | DSPR | | Deleted: (Future Capability) |
| ELECTRONIC IN/MANUAL OUT | 3.1.1.7 | EMUF | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | None | | ERRT |
| FEDERAL APPLICANT - NO CHARGE | 3.1.1.8 | FANC | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| FEDERAL APPLICANT - USER FEE | 3.1.1.9 | FAUF | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| ELECTRONIC FINGERPRINT DISPOSITION SUBMISSION (Future Capability) | 3.1.1.10 | FDSP | 1 | 1 | 1-14 | 0 | 0 | 0 | 0 | SRE | | ERRT |
| FEDERAL NO-CHARGE DIRECT ROUTE | 3.1.1.11 | FNDR | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| NON-FEDERAL NO-CHARGE DIRECT ROUTE | 3.1.1.12 | NNDR | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| NON-FEDERAL ADVANCED PAYMENT | 3.1.1.13 | NFAP | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| NON-FEDERAL APPLICANT USER FEE | 3.1.1.14 | NFUF | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| MISCELLANEOUS APPLICANT - CIVIL | 3.1.1.15 | MAP | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| KNOWN DECEASED | 3.1.1.16 | DEK | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | ULM | ERRT |
| UNKNOWN DECEASED | 3.1.1.17 | DEU | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| MISSING PERSON | 3.1.1.18 | MPR | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| AMNESIA VICTIM | 3.1.1.19 | AMN | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| NON-FEDERAL USER FEE EXPEDITE | 3.1.1.21 | NFUE | 1 | 1 | 1-14 | 0-2 | 0 | 0-4 | 0-8/0-2 | SRE | | ERRT |
| <u>RAPID PRINT IMAGE SEARCH (Future Capability)</u> | <u>3.1.1.22</u> | <u>RPIS</u> | <u>1</u> | <u>1</u> | <u>1-14</u> | <u>0-2</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>SRE</u> | | Formatted: Font: 8 pt |
| <u>INTERNATIONAL TERRORIST FILE REQUEST (Future Capability)</u> | <u>3.1.1.23</u> | <u>ITF</u> | <u>1</u> | <u>1</u> | <u>1-14</u> | <u>0-2</u> | <u>0</u> | <u>0-4</u> | <u>0-8/0-2</u> | <u>SRE</u> | | Formatted: Font: 8 pt |
| FINGERPRINT VERIFICATION REPORT (Future Capability) | 3.1.1.26 | FVR | 1 | 1 | 2-14 | 0 | 0 | 0 | 0/0 | SRE | | Formatted: Font: 8 pt |
| Fingerprint Investigative Searches | | | | | | | | | | | | |
| TENPRINT FINGERPRINT IMAGE SEARCH | 3.2.1.1 | TPIS | 1 | 1 | 2-10 | 0 | 0 | 0 | 0/0 | SRT | | Formatted: Font: 8 pt |
| TENPRINT FINGERPRINT FEATURES SEARCH | 3.2.1.2 | TPFS | 1 | 1 | 0 | 0 | 2-10 | 0 | 0/0 | SRT | | Deleted: 4 |
| TENPRINT RAPSHEET REQUEST | 3.2.1.5 | TPRS | 1 | 1 | 14 | 0 | 0 | 0 | 0/0 | TPRR | | Deleted: RAPID PRINT IMAGE SEARCH (Future Capability) ... [70] |
| Latent Submissions | | | | | | | | | | | | |
| LATENT FINGERPRINT IMAGE SUBMISSION | 3.3.1.1 | LFS | 1 | 1 | 1-10 | 1-10 | 0 | 0 | 0/0 | LSR | | ERRL |
| COMPARISON FINGERPRINT IMAGE SUBMISSION | 3.3.1.2 | CFS | 1 | 1 | 14 | 0 | 0 | 0 | 0/0 | none | | ERRL |
| MAJOR CASE IMAGE SUBMISSION | 3.3.1.3 | MCS | 1 | 1 | 0 or 14 | 1-10 | 0 | 0 | 0-8/0 | none | | ERRL |
| EVALUATION LATENT FINGERPRINT IMAGE SUBMISSION | 3.3.1.4 | ELR | 1 | 1 | 1-10 | 1-10 | 0 | 0 | 0/0 | NAR | | ERRL |
| Latent Fingerprint Searches | | | | | | | | | | | | |
| LATENT FINGERPRINT IMAGE SEARCH | 3.4.1.1 | LFIS | 1 | 1-2 | 1-10 | 0-10 | 0 | 0 | 0/0 | SRL | ULM, UULD | Formatted: Indent: Left: 0", First line: 0", Tabs: 4.5", Centered + 8.88", Right + Not at 0.5" + 1" + 1.5" + 2" + 4" + 7.5" + 7.63" |
| LATENT FINGERPRINT FEATURE SEARCH | 3.4.1.2 | LFFS | 1 | 1 | 0 | 0 | 1-10 | 0 | 0/0 | SRL | ULM, UULD | Formatted: Indent: Left: 0", First line: 0", Tabs: 4.5", Centered + 8.88", Right + Not at 0.5" + 1" + 1.5" + 2" + 4" + 7.5" + 7.63" |
| LATENT PENETRATION QUERY | 3.4.1.5 | LPNQ | 1 | 1 | 0 | 0 | 0 | 0 | 0/0 | LPNR | | Deleted: 002 |
| Latent File Maintenance Requests | | | | | | | | | | | | |
| UNSOLVED LATENT RECORD DELETE REQUEST | 3.5.1.1 | ULD | 1 | 1 | 0 | 0 | 0 | 0 | 0/0 | ULDR | | Deleted: ... |
| UNSOLVED LATENT ADD CONFIRM REQUEST | 3.5.1.2 | ULAC | 1 | 1 | 0 | 0 | 0 | 0 | 0/0 | ULAR | | Deleted: ... |
| Image Request and Upgrade | | | | | | | | | | | | |
| <u>IMAGE REQUEST</u> | <u>3.6.3.7</u> | <u>IRQ</u> | <u>1</u> | <u>1</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0/0</u> | <u>IRR</u> | | Deleted: ... |
| | <u>3.6.1.1</u> | <u>IRQ</u> | <u>1</u> | <u>1</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0/0</u> | <u>IRR</u> | | Deleted: APRIL 1, 2008 |

Table L-3. Record Set Requirements Summary by Type of Transaction

| Transaction | Ref | TOT | T1 | T2 | T4* /14 | T7 /13 | T9 | T10 | T15 /17** | Normal Response | Delayed Response | Error Response |
|--|-----------------|------------|----------|----------|------------|-----------|----------|----------|--------------|--------------------|---------------------|-------------------|
| <u>FINGERPRINT IMAGE SUBMISSION</u> | <u>3.7.1.1</u> | <u>FIS</u> | <u>1</u> | <u>1</u> | <u>14</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0/0</u> | <u>FISR</u> | | <u>ERRI</u> |
| <u>Subject Photo Services</u> | <u>3.10</u> | | | | | | | | | | | |
| <u>SUBJECT PHOTO REQUEST</u> | <u>3.10.1.1</u> | <u>CPR</u> | <u>1</u> | <u>1</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0/0</u> | <u>PRR</u> | | <u>PRR</u> |
| <u>SUBJECT PHOTO DELETE REQUEST</u> | <u>3.10.1.2</u> | <u>CPD</u> | <u>1</u> | <u>1</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0</u> | <u>0/0</u> | <u>PDR</u> | | <u>PDR</u> |
| <i>Latent Administrative Transactions</i> | 3.11 | | | | | | | | | | | |
| LATENT REPOSITORY STATISTICS QUERY | 3.11.1.1 | LSRQ | 1 | 1 | 0 | 0 | 0 | 0 | 0/0 | LRSR | | ERRA |
| LATENT SEARCH STATUS AND MODIFICATIONS QUERY | 3.11.1.2 | LSMQ | 1 | 1 | 0 | 0 | 0 | 0 | 0/0 | LSMR | | ERRA |
| <i>Palmprint Services (Future Capability)</i> | 3.13 | | | | | | | | | | | |
| PALMPRINT ENROLLMENT REQUEST (Future Capability) | 3.13.2 | PPE | | | | | | | | | | |
| <i>Iris Services (Future Capability)</i> | 3.14 | | | | | | | | | | | |
| IRIS ENROLLMENT REQUEST (Future Capability) | 3.14.1.1 | IIE | | | | | | | | | | |
| <i>Rap Back Services (Future Capability)</i> | 3.16 | | | | | | | | | | | |
| RAP BACK HIT NOTIFICATION (Future Capability) | 3.16.2.1 | | | | | | | | | | | |
| RAP BACK FLAG DELETION REQUEST (Future Capability) | 3.16.2.2 | | | | | | | | | | | |
| RAP BACK VERIFICATION REQUEST (Future Capability) | 3.16.2.3 | | | | | | | | | | | |
| RAP BACK MAINTENANCE REQUEST (Future Capability) | 3.16.2.4 | | | | | | | | | | | |

Deleted: Recordset

Deleted: 5

Deleted: 5

Deleted: RBHN

Deleted: RBFD

Deleted: RBV

Deleted: RBM

* For tenprint submissions, the number of Type-4/14 images is nominally 14. When less than 14 are sent, the AMP field of the accompanying Type-2 must account for all missing images.
 ** Type-15 images apply for Palmprint Enrollment and Major Case Print Collections in conjunction with tenprint submissions. Type-17 images apply for Iris Image Enrollment.

Formatted: Indent: Left: 0", First line: 0", Tabs: 4.5", Centered + 8.88", Right + Not at 0.5" + 1" + 1.5" + 2" + 4" + 7.5" + 7.63"

Deleted: 002

Deleted: . . .

Deleted:

Deleted: APRIL 1, 2008

Table L-4. Record Set Requirements Summary by Type of Response

Response Types

Deleted: Recordset

| Name of Transaction | Ref | Normal | Delayed | Error | T1 | T2 | T4 /14 | T7 /13 | T9 | T10 | T15 | Request TOTs |
|--|----------------------|--------|---------|-------|----|----|--------|--------|----|-----|-----|---------------------------------|
| <i>Fingerprint Identification Responses</i> | | | | | | | | | | | | |
| <u>RAPID PRINT IMAGE SEARCH RESPONSE (Future Capability)</u> | 3.1, 3.4 3.1.1.22 | RPSR | | ERRT | 1 | 1 | 0 | 0 | 0 | 1 | 0 | RPIS |
| <u>INTERNATIONAL TERRORIST FILE RESPONSE (Future Capability)</u> | 3.1.1.23 | ITFR | | ERRT | 1 | 1 | 0 | 0 | 0 | 1 | 0 | ITF |
| SUBMISSION RESULTS - ELECTRONIC | 3.1.1.24 | SRE | SRE | | 1 | 1 | 0 | 0 | 0 | 1 | 0 | CAR CPNU, CPDR |
| SUBMISSION RESULTS - ELECTRONIC | 3.1.1.24 | SRE | SRE | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | FANC, FAUF, NFUF, MAP, NFAP, FN |
| SUBMISSION RESULTS - ELECTRONIC | 3.1.1.24 | SRE | SRE | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | NNDR |
| UNSOLVED LATENT MATCH RESPONSE | 3.4.1.4 | ULM | | | 1 | 1 | 1-10 | 0-10 | 0 | 0 | 0 | DEK, DEU, MPR, AMN, NFUE |
| TENPRINT TRANSACTION ERROR | 3.1.1.27 | ERRT | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | CAR, CNA, DEK CPNU, CPDR |
| DISPOSITION RESPONSE (Future Capability) | 3.1.1.25 | DSPR | | ERRT | 1 | 1 | 0 | 0 | 0 | 0 | 0 | All the above DSPE |
| <i>Fingerprint Investigative Search Responses</i> | | | | | | | | | | | | |
| SEARCH RESULTS - TENPRINT | 3.2.1.3 | SRT | | | 1 | 1 | 0-14 | 0 | 0 | 0 | 0 | TPIS, TPFS |
| TENPRINT TRANSACTION ERROR | 3.2.1.4 | ERRT | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | TPIS, TPFS |
| TENPRINT RAPSHEET RESPONSE | 3.2.1.5 | TPRR | | ERRT | 1 | 1 | 0 | 0 | 0 | 0 | 0 | TPRS |
| <i>Latent Submission Responses</i> | | | | | | | | | | | | |
| <u>UNSOLVED LATENT MATCH RESPONSE</u> | 3.4.1.4 | ULM | | | 1 | 1 | 1-10 | 0-10 | 0 | 0 | 0 | LFS |
| <u>LATENT SUBMISSION RESULTS</u> | 3.3.1.5 | LSR | | | 1 | 1 | 0-14 | 0 | 0 | 0 | 0 | LFS |
| <u>NOTIFICATION OF ACTION RESPONSE</u> | 3.3.1.6 | NAR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ELR |
| <u>LATENT TRANSACTION ERROR</u> | 3.3.1.7 | ERRL | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LFS, CFS, MCS, ELR |
| <i>Latent Fingerprint Search</i> | | | | | | | | | | | | |
| <u>UNSOLVED LATENT MATCH RESPONSE</u> | 3.4.1.4 | ULM | | | 1 | 1 | 1-10 | 0-10 | 0 | 0 | 0 | LFIS, LFFS |
| <u>SEARCH RESULTS - LATENT</u> | 3.4.1.3 | SRL | | | 1 | 1 | 0-NCR | 0 | 0 | 0 | 0 | LFIS, LFFS |
| <u>LATENT PENETRATION RESPONSE</u> | 3.4.1.6 | LPNR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LPNQ |
| <u>LATENT SEARCH IDENT RESPONSE</u> | 3.4.1.7 | LSIR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LFIS, LFFS |
| <u>LATENT TRANSACTION ERROR</u> | 3.4.1.8 | ERRL | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LFIS, LFFS, LPNQ |
| <u>UNSOLICITED UNSOLVED LATENT DELETE</u> | 3.5.1.5 | UULD | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LFIS, LFFS |
| <i>Latent File Maintenance Request</i> | | | | | | | | | | | | |
| <u>UNSOLVED LATENT RECORD DELETE RESPONSE</u> | 3.5.1.4 | ULDR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ULD |
| <u>UNSOLVED LATENT ADD CONFIRM RESPONSE</u> | 3.5.1.3 | ULAR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ULAC |
| <u>UNSOLICITED UNSOLVED LATENT DELETE</u> | 3.5.1.5 | UULD | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ULAC |
| <u>LATENT TRANSACTION ERROR</u> | 3.5.1.7 | ERRL | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ULD, ULAC |
| <i>Image Services Responses</i> | | | | | | | | | | | | |
| IMAGE REQUEST RESPONSE | 3.6.1.2 | IRR | | | 1 | 1 | 0-14 | 1 | 1 | 0 | 0 | IRQ |
| <u>IMAGE SUMMARY RESPONSE</u> | 3.6.1.3 | ISR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | IRQ |
| <u>IMAGE TRANSACTION ERROR</u> | 3.6.1.4 | ERRI | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | IRQ, FIS |
| FINGERPRINT IMAGE SUBMISSION RESPONSE | 3.7.1.2 | FISR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | FIS |
| <i>Subject Photo Services</i> | | | | | | | | | | | | |
| PHOTO REQUEST RESPONSE | 3.10 3.10.1.3 | PRR | | PRR | 1 | 1 | 0 | 0 | 0 | 1-4 | 0 | CPR |

- Formatted: Indent: Left: 0", Hanging: 0.3"
- Formatted: Indent: Left: 0", Hanging: 0.3"
- Deleted: 2
- Deleted: RBHN
- Formatted: English (U.S.)
- Deleted: 2
- Formatted: English (U.S.)
- Deleted: 2
- Deleted: 5
- Deleted: 3
- Deleted: RAPID PRINT IMAGE SEARCH RESPONSE (Future Capability) ... [71]
- Formatted: Font: Times New Roman, 8 pt
- Deleted: 3
- Formatted: Font: Times New Roman, 8 pt
- Deleted: IMAGE TRANSACTION ERROR ... [72]
- Formatted: Indent: Left: 0", First line: 0", Tabs: 4.5", Centered + 8.88", Right + Not at 0.5" + 1" + 1.5" + 2" + 4" + 7.5" + 7.63"
- Deleted: 002
- Deleted: . . .
- Deleted:
- Deleted: APRIL 1, 2008

Table L-4. Record Set Requirements Summary by Type of Response

| Name of Transaction | Ref | Response Types | | | | | | | | | Request TOTs | |
|---|----------|----------------|---------|-------|----|----|--------|--------|----|-----|--------------|------------|
| | | Normal | Delayed | Error | T1 | T2 | T4 /14 | T7 /13 | T9 | T10 | | T15 |
| PHOTO DELETE RESPONSE | 3.10.1.3 | PDR | | PDR | 1 | 1 | 0 | 0 | 0 | 0 | 0 | CPD |
| <i>Latent Administrative Transactions</i> | 3.11 | | | | | | | | | | | |
| LATENT REPOSITORY STATISTICS QUERY | 3.11.1.3 | LRSR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LRSQ |
| LATENT SEARCH STATUS AND MODIFICATIONS | 3.11.1.4 | LSMR | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LSMQ |
| ADMINISTRATIVE TRANSACTION ERROR | 3.11.1.5 | ERRA | | | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LRSQ, LSMQ |

Deleted: Recordset

Deleted: Latent Submission Re... [73]

Formatted: English (U.S.)

Formatted: Indent: Left: 0", First line: 0", Tabs: 4.5", Centered + 8.88", Right + Not at 0.5" + 1" + 1.5" + 2" + 4" + 7.5" + 7.63"

Deleted: 002

Deleted: . . .

Deleted:

Deleted: APRIL 1, 2008

APPENDIX M

TRANSACTION ERROR MESSAGES

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|------------------------------------|---|-------|-------------------------|---|-----------|
| A0001 | Unauthorized ULF delete | Requested deletion from ULF not authorized. | 0 | | | |
| A0004 | Unauthorized EBTS Transaction | Requestor is not authorized for transaction type %1. | 1 | TOT of incoming message | | |
| A0008 | Unauthorized ULF Add Confirm | Requested ULF Add Confirm request not authorized. | 1 | SCNA | | |
| A0009 | Latent Search Queue Request Reject | This Latent Search Queue modification request is invalid. | 0 | | | |
| A0016 | Requested Photo Not Available | Photo requested in conjunction with Image Request is not available for %1 | 1 | UCN | | |
| A0017 | Quoted UCN Not Found | Quoted UCN 1% not found in database | 1 | UCN | | |
| E0001 | Required element missing | Mandatory element %1 was not supplied in message. | 1 | Element Name | | |
| E0002 | Element failed validation | Element %1, with value of [%2] contains invalid data. | 2 | Element Name | Element Value | |
| E0003 | Element failed validation | Element %1, with value of [%2] contains invalid data. The data may not comply with the acceptable range of values. | 2 | Element Name | Element Value | |
| E0004 | EBTS record parse error | EBTS logical record type %1 containing IDC of [%2] in message does not comply with message Contents or Length field values or the record is not parseable | 2 | Logical Record Type | IDC value or the value -1 if the named logical record is missing or is a Type-1 record. | |
| E0005 | EBTS field parse error | EBTS field %1 could not be parsed. Check use of separator characters and presence of all required subfields. | 1 | Field Tag | | |
| E0006 | Field relationship error | The value of element %1 is inconsistent with the value of element %2. | 2 | Element Name | Element Name | |
| E0007 | NFS File not available | NFS file %1 not available for transfer. | 1 | FILEHANDLE | | |
| E0008 | NFS File Read Error | NFS file %1 produced a read error during file transfer. Check for proper format. %2 %3 | 1-3 | FILEHANDLE | Free Text | Free Text |

Deleted: A0002 – INTERNAL ... [74]

Deleted: A0005 – INTERNAL ... [75]

Deleted: A0010 – INTERNAL ... [76]

Formatted: Tabs: 9", Right + Not at 7"

Deleted: 002

Deleted: .

Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|--|---|-------|-----------------|-------------------|-----------|
| E0009 | NFS File ICN Error | NFS File ICN does not match the ICN provided in the request message. | 0 | | | |
| E0010 | Too Few FNUs for FST | Only one FNU, %1, was supplied for Restore FNU File Synchronization with FST %2. | 2 | FNU | FST | |
| E0011 | Too many FNUs for FST | More than one FNU was supplied for Restore FNU File Synchronization with FST %1. | 1 | FST | | |
| E0012 | Message Length Inconsistent | The length of the CJIS WAN message is inconsistent with the sum of the lengths of the logical records contained within it. | 0 | | | |
| E0013 | NFS File Write Error | NFS file %1 produced a write error during file transfer %2 %3. | 1-3 | FILEHANDLE | Free Text | Free Text |
| H0001 | Required header element missing | Mandatory element %1 was not supplied in message header. | 1 | Element Name | | |
| H0002 | Header element failed validation | Header element %1, with value of [%2] contains invalid data. | 2 | Element Name | Element Value | |
| H0003 | Header element failed validation | Header element %1, with value of [%2], contains invalid data. The data may not comply with the acceptable range of values. | 2 | Element Name | Element Value | |
| L0001 | SLC Repositories Full | SLC repository %1 is at max allowed records; to add new subject, delete existing subject. | 1 | NDR | | |
| L0002 | Subject does not exist in Criminal or Civil File | Subject with identifier %1 does not exist in repository. | 1 | UCN | | |
| L0003 | SLC Repository does not exist | Cannot perform requested action, SLC repository %1 does not exist. Inform Segment Administrator of possible SLC File Synchronization error. | 1 | NDR | | |
| L0004 | File image not available | The images for subject identifier %1 are not available from repository %2. | 2 | UCN | NDR | |
| L0005 | High Penetration Search Rejected | Latent search penetration estimate of %1 percent exceeds the allowable limit of %2 percent. | 2 | Request Percent | Authorization Cap | |
| L0006 | Invalid image type | The supplied image(s) could not be used for characterization of subject. | 0 | | | |
| L0007 | Features not usable | The supplied features could not be used for requested search. | 0 | | | |
| L0008 | Characteristics quality low | The quality of the characteristics is too low to be used. | 0 | | | |

Formatted: Tabs: 9", Right + Not at 7"
 Deleted: 002
 Deleted: .
 Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|---|--|-------|--------------------|-------------------|-----------|
| L0009 | Image decompression error | Error occurred during decompression of the fingerprint images. | 0 | | | |
| L0010 | Cannot search an empty SLC repository | A search request was made against SLC repository number %1 which currently contains no subjects. To differentiate from a search with no results, this error is being returned. | 1 | NDR | | |
| L0011 | Subject already exists, duplicates not allowed in Criminal or Civil Files | A request was made to add subject identifier %1 to Criminal or Civil File in which the subject already exists. | 1 | UCN | | |
| L0012 | ULF Delete Error | An error was encountered in processing the requested deletion from the Unsolved Latent File. | 0 | | | |
| L0013 | General Logic Error | A general logic error was detected that is not currently defined. Optional error message: %1 %2 %3. | 0-3 | Free Text | Free Text | Free Text |
| L0014 | ULF Delete Subject Missing | Cannot perform the ULF delete request for %1 because the subject is not present in the ULF. | 1 | SCNA | | |
| L0015 | Attempt to remove last arrest, court, or custody component | An attempt has been made to remove the last %1 from subject record %2. | 2 | Filed Name | FNU | |
| L0016 | Latent Search Penetration Estimate | NOTICE ONLY, NOT AN ERROR – Latent search penetration estimate is %1. Your limit is currently %2. | 2 | Request Percentage | Authorization Cap | |
| L0017 | Attempt to modify SCHF with improper TYS | Attempt to change the Criminal History File with an improper TYS of %1. | 1 | TYS | | |
| L0018 | Latent search queue full | The requested search exceeds the allocation for your organization or state. | 0 | | | |
| L0019 | Subject already exists, duplicate identifiers not allowed in SLC file | A request was made to add subject identifier %1 to SLC repository %2 in which the subject already exists. Subjects may NOT be duplicated within this repository. | 2 | UCN | NDR | |
| L0020 | Subject does not exist in SLC file | A request was made to delete or update subject identifier %1 to SLC repository %2. The subject does not exist in this repository. | 2 | UCN | NDR | |
| L0021 | Restorability Mismatch | FNU %1 with restorability code of FST %2 does not match that provided in message. | 2 | FNU | RST value of FNU | |
| L0022 | FNU Not Restorable | FNU %1 has not undergone a restorable action. | 1 | FNU | | |

Formatted: Tabs: 9", Right + Not at 7"

Deleted: 002

Deleted: .

Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|---------------------------------------|---|-------|---|-----------|-----------|
| L0023 | SID required | NFF participants must provide a SID on a criminal retain tenprint submission. | 0 | | | |
| L0024 | SID already exists for NFF submission | The SID provided in the criminal tenprint submission, %1, is already associated with the subject with FBI number %2 and could not be established for a new NFF subject. | 2 | SID | FNU | |
| L0025 | SID already exists | The SID provided in the criminal tenprint submission, %1, is already associated with the subject with FBI number %2 and could not be established for a new subject. | 2 | SID | FNU | |
| L0026 | PUR not allowed for subject | Purpose code not allowed for subject %1. | 1 | FNU | | |
| L0027 | SPCs not allowed | A manual record cannot be established with additional SPC codes. | 0 | | | |
| L0028 | Exceeded ICO maximum length | Cannot add data because the maximum length of ICO field would be exceeded. There are only %1 characters remaining in the ICO field. | 1 | Number of unused bytes remaining in ICO field (ASCII representation). | | |
| L0029 | Invalid update of subject with AUD C | Cannot update subject record %1 because it contains an AUD=C. | 1 | FNU | | |
| L0030 | Invalid update of subject with AUD T | Cannot update subject record %1 because it contains an AUD=T | 1 | FNU | | |
| L0031 | Invalid update of subject record | Cannot update subject record %1 because of its AUD value. | 1 | FNU | | |
| L0032 | Duplicate DOA and DOS | Cannot update subject's record because DOA %1 and corresponding DOS already exist. Refer to FBI Number %2. | 2 | DOA | FNU | |
| L0033 | Element Entry Limit Exceeded | The requested update of this record would cause the maximum number of entries of the %1 field to be exceeded. | 1 | Field Name | | |
| L0034 | Existing identification comments | Cannot overwrite existing ICO. | 0 | | | |
| L0035 | DOD prior to DOA | Date of arrest in submission is later than the date of death in subject's record. | 0 | | | |
| L0036 | Conversion anomaly | Cannot add a conversion cycle for an NFF participating state. | 0 | | | |
| L0037 | DOA not later than existing DOB | Date of arrest in submission is prior to existing date of birth in the subject's record. | 0 | | | |

Formatted: Tabs: 9", Right + Not at 7"
 Deleted: 002
 Deleted: .
 Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|--|--|-------|---------------------|--------------|-----------|
| L0038 | SID already exists from NFF state | Cannot establish new SID %1 for this subject because your state has already established SID %2 for this subject. | 2 | SID from submission | Existing SID | |
| L0039 | Purpose Code Required | Purpose code is required to modify this record. | 0 | | | |
| L0040 | No Matching DOA/DOS | There is no matching DOA/DOS in the subject's record. | 0 | | | |
| L0041 | Cannot Update Due to Inactive Data | The subject's cycle cannot be updated due to inactive record status. | 0 | | | |
| L0042 | No Matching Court Data | Matching court data does not exist. | 0 | | | |
| L0043 | No Corresponding Court Count | Cannot add supplemental court data – there is no corresponding court count. | 0 | | | |
| L0044 | No Update Of NFF Record | Cannot update NFF record. | 0 | | | |
| L0045 | Data Already On File | Cannot update this cycle - data already exist in record. | 0 | | | |
| L0046 | TPTP Notify Error | AFIS Search number %1 or candidate number %2 cannot be associated with previous search. | 2 | SCNA | UCN | |
| L0047 | ULF Add Confirm Error | Cannot perform the ULF add confirm request for %1 because the subject is not present in the ULF. | 1 | SCNA | | |
| L0049 | No Matching Data Found | No data found to match input value %1 with record value %2. | 2 | Name of field | field value | |
| L0050 | Invalid Request for Segment Type | This maintenance request cannot be applied because of the SGT value contained in the record. | 0 | | | |
| L0051 | Cycle is not sealed. | Cannot apply unseal request because cycle has not previously been sealed. | 0 | | | |
| L0052 | Submitter is not Authorized to Update Record | Requestor is not authorized to perform the requested file maintenance action. | 0 | | | |
| L0057 | Improper Finger Specified | Latent searches cannot process %1 possible finger positions for %2 supplied search fingers. | 2 | FGN_CNT | AFV_CNT | |
| L0058 | UCN and NDR format incompatible | The designated repository (%1) does not correlate to the provided record format number (%2). | 2 | NDR | UCN | |
| L0059 | Duplicate fingers | Ten finger information supplied for field %1 (%2) is incorrect. | 2 | Name of field | Field Value | |

Deleted: L0048 – INTERNAL (... [77])

Deleted: L0053 – INTERNAL (... [78])

Formatted: Tabs: 9", Right + Not at 7"

Deleted: 002

Deleted: .

Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|--|--|-------|---------------|--------------------|-----------|
| L0060 | Death is already recorded for this subject | An indication that this subject is deceased is currently present in this record. | 0 | | | |
| L0061 | Non-matching DOB | DOB on submission document does not match DOB in record. | 0 | | | |
| L0062 | Reference Element Name Mismatch | The element %1 provided for reference in this maintenance request is not present in this record. | 1 | Name of Field | | |
| L0063 | Existing Data Condition | Data cannot be added to this field, %1, because data is already present. | 1 | Name of Field | | |
| L0064 | Duplicate Data Condition | An attempt to add or modify data that duplicates existing data in field %1 | 1 | Name of Field | | |
| L0065 | SID/ORI Mismatch | The SID in the maintenance request is not consistent with the ORI in the arrest. | 0 | | | |
| L0066 | SID/Pointer Mismatch | The SID in the maintenance request does not match the state pointer in the MF-IDENTIFICATION-DATA set. | 0 | | | |
| L0067 | Illegal Add to AUD N Record | An attempt has been made to add data to a deceased record. | 0 | | | |
| L0068 | Illegal Add to Non-AUD N Record | An attempt has been made to post microform data to a record containing an AUD other than N. | 0 | | | |
| L0069 | Invalid SPF Request | Existing SPF code precludes addition of this code. | 0 | | | |
| L0070 | Illegal Sequence Count | A request has been made for a value in %1 that is not the next available after %2 in the sequence. | 2 | Filed Name | Current last value | |
| L0071 | Illegal Delete Request for AUD W Record | A request has been made for deletion of data from a field other than ANA from an AUD W record. | 0 | | | |
| L0072 | No Match for Data | Cannot match data in field %1 in this maintenance request with any data in field %2 the record. | 2 | Field Name | Field Name | |
| L0073 | Cannot Delete SID | Cannot delete SID because record contains a matching state pointer. | 0 | | | |
| L0074 | Illegal Request to Delete Primary Data | Cannot delete primary data while secondary data are still present. | 0 | | | |
| L0075 | Illegal Request to Remove Custody Data | Attempt has been made to remove a custody segment while corresponding arrest data remain. | 0 | | | |

Formatted: Tabs: 9", Right + Not at 7"

Deleted: 002

Deleted: .

Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|--|--|-------|------------|-------------------|-----------|
| L0076 | Illegal SCH Modification Request | An SCH Modification Request has attempted to perform a maintenance action against a record awaiting expungement. | 0 | | | |
| L0077 | Invalid Modify Request Because of Code Value Set | Cannot modify field %1 because of the value of %2 code contained in record. | 2 | Field Name | Either AUD or SGT | |
| L0078 | Field Value Mismatch | Cannot find match in the database for %1 containing value %2. | 2 | Field Name | Field Value | |
| L0079 | Invalid SID | The SID %1 failed III edit check. | 1 | SID value | | |
| L0080 | Pointer/Data Mismatch | Cannot update data associated with active state pointer because of mismatch with %1 field. | 1 | Field Name | | |
| L0081 | Attempt to Modify Empty Field | A maintenance request has been made against empty field %1. | 1 | Field Name | | |
| L0089 | Year of Birth out of range | The year of birth in the maintenance request is not within 10 years of the DOB(s) contained in the subject. | 0 | | | |
| L0090 | No Name Match | The name in the maintenance request does not match any name contained in the indicated subject. | 0 | | | |
| L0091 | NIC Number Match | The maintenance request contains a NIC number already contained in the SCH. | 0 | | | |
| L0092 | DOW Matches DOB | The DOW contained in the maintenance request matches a DOB in the subject record. | 0 | | | |
| L0099 | CBL/DCA Error | An attempt has been made to add a CBL without a related DCA in either the request message or the SCH record. | 0 | | | |
| L0100 | Court Segment Data Error | This maintenance request must include CCT, CON, COL, and CPL. | 0 | | | |
| L0101 | Pointer/Date Mismatch | A request has been made to modify either %1 or %2 that would result in a DPE greater than the DDE. | 2 | DDE | DPE | |
| L0103 | Photo SPF 'E' Error | A request has been made to either set or remove SPF of 'E' that would be inconsistent with the state of CRIMINAL-SUBJECT-PHOTO-DATA. | 0 | | | |
| L0107 | Incomplete SCT | A request has been made that is missing a required element from set SCT. | 0 | | | |
| L0109 | Poor Image Quality | The quality of the fingerprint images is too poor to permit processing. | 0 | | | |

Deleted: L0082 – INTERNAL ... [79]

Deleted: L0093 – INTERNAL ... [80]

Deleted: L0102 – INTERNAL ... [81]

Deleted: L0104 – INTERNAL ... [82]

Deleted: L0108 – INTERNAL ... [83]

Formatted: Tabs: 9", Right + Not at 7"

Deleted: 002

Deleted: .

Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|---|--|-------|------------------------------------|-----------|-----------|
| L0110 | MRD Merge Failure | Tenprint submission failed to merge with MRD data. | 0 | | | |
| L0111 | Image Sequence Error | Submitted tenprint finger images are out of sequence. | 0 | | | |
| L0112 | No statutory authority | The agency indicated by the ORI or CRI in this submission is not authorized to request this service. | 0 | | | |
| L0113 | Non-serious charge | This submission references an arrest charge representing a non-criterion offense. | 0 | | | |
| L0114 | TOT/Submission Data Error | The Type of Transaction is inconsistent Error with the Reason Fingerprinted. | 0 | | | |
| L0115 | Other QC Error | A QC error has occurred. | 0 | | | |
| L0116 | Fingerprint Pattern Quality Error | Fingerprint pattern(s) not discernible | 0 | | | |
| L0117 | Fingerprint Pattern Area Error | Insufficient pattern area(s) recorded for identification purposes | 0 | | | |
| L0118 | ITN Image Quality/Sequence Error | Erroneous or incomplete fingerprint(s) on images: fingers or hands out of sequence, printed twice, missing, and no reason given. | 0 | | | |
| L0119 | Charge listed needs literal translation | The charge listed in the submission requires that a literal translation be provided. | 0 | | | |
| L0120 | Invalid update of subject with AUD N | Cannot update subject record %1 because AUD = N. | 1 | FNU | | |
| L0121 | Invalid update of subject with AUD M | Cannot update record %1 because this record is currently contained in the manual file. Record must be converted. | 1 | FNU | | |
| L0122 | No SLC Add | Unable to complete SLC Add for identifier %1 in repository %2 and user %3. | 3 | UCN | NDR | EID |
| L0123 | No SLC Delete | Unable to complete SLC Delete for identifier %1 in repository %2 and user %3. | 3 | UCN | NDR | EID |
| L0124 | Unacceptable Criteria | The submission does not meet latent acceptance criteria. | | | | |
| L0125 | Invalid ORI | This ORI, %1, is not present in the CCA file. | 1 | ORI value from Maintenance Request | | |

Formatted: Tabs: 9", Right + Not at 7"
 Deleted: 002
 Deleted: .
 Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|---|---|-------|--|-------------------------------|-----------|
| L0126 | Invalid CRI | This CRI, %1, is not present in the CCA file. | 1 | CRI value from Maintenance Request | | |
| L0127 | Invalid SCT | This file maintenance request contained an SCT with an invalid ORI of %1. | 1 | ORI value from Maintenance Request | | |
| L0128 | Missing SRE | This file maintenance request must contain a value for SRE. | 0 | | | |
| L0129 | Missing PUR code | Subject record contains sealed data – this request for an IDR requires a PUR code. | 0 | | | |
| L0130 | File Maintenance element error | This file maintenance request contains invalid data, %1, in the field %2. | 2 | Field value from Maintenance Request | Field | |
| L0131 | Required element missing | Mandatory element %1 was omitted from message. | 1 | Element Name | | |
| L0132 | STOT/NDR Discrepancy | The STOT, %1, for this request is not consistent with placing the images in the %2 file. | 2 | STOT value | Name of the target file (NDR) | |
| L0133 | Fingerprint Image Submission Non-ident | The subject of this Fingerprint Image Submission contains FNU %1, which is not contained in the FBI Subject Criminal History files. | 1 | FNU | | |
| L0134 | Ad Hoc Subject Search String Syntax Error | The submitted search string text contains a syntax error. The attachment includes the portion of the string up to the error, shown here: %1 | 1 | The expanded query string up to point of error | | |
| L0141 | STOT/RET Discrepancy | Retention code must equal Y for an STOT of CNA. | 0 | | | |
| L0142 | SLC Copy Failed | SLC Copy failed: %1 %2 %3. | 0-3 | Free Text | Free Text | Free Text |
| L0143 | AFIS Storage Full for SLC Repository | SLC repository %1 is at max allotted storage capacity within AFIS; to add new subject, delete existing subject or contact the ITN Segment Administrator to allot more storage capacity. | 1 | NDR | | |
| L0144 | Field Relationship Error | The value of element %1 is inconsistent with the value of element %2. | 2 | Element Name | Element Name | |

Deleted: L0135 – INTERNAL ... [84]

Formatted: English (U.S.)

Formatted: Tabs: 9", Right + Not at 7"

Deleted: 002

Deleted: .

Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|--|---|-------|------------|-----------|-----------|
| L0145 | Invalid Ad Hoc Search Criterion | The Service Provider is not authorized to perform the type of Ad Hoc Subject Search requested, or the query contains a restricted term. Contact the ITN Segment Administrator to determine corrective action. | 0 | | | |
| L0146 | SLC File Not Offline | COPY ALL SLC failed. To copy an entire SLC file, the source and destination SLC files must be offline. Contact the AFIS Segment Administrator to take the file(s) offline. | 0 | | | |
| L0147 | Contributor has remote capability | The contributing state has remote capability. | 0 | | | |
| L0148 | Poor Latent Image Quality | The image quality is not adequate for conducting an AFIS search. | 0 | | | |
| L0149 | Bad Search Criteria | The descriptive search criteria is not adequate or is incomplete. | 0 | | | |
| L0150 | Unassigned FBI Number | Subject %1 may be in the FBI manual files, but does not exist in the Subject Criminal History File. | 1 | FNU | | |
| L0151 | Photo Not Available | Photo Not Available | 0 | | | |
| L0152 | Photo Action on Improper AUD Code | IAFIS cannot retrieve or delete the cited photo because the associated record is purged, expunged, not automated, deceased, or deleted. | 0 | | | |
| L0153 | Photo Action on AUD C Record | IAFIS cannot retrieve or delete the cited photo with FBI %1 because it has been consolidated with FBI %2. | 2 | FNU | FNU | |
| R0001 | Queue Full | A message queue is temporarily full. | 0 | | | |
| R0002 | Undefined Segment Error | Internal segment error; retry message. | 0 | | | |
| R0003 | Service Unavailable | The requested Tuxedo service %1 is not currently available. | 1 | SERV value | | |
| S0001 | Cannot match the response with a request | A response message type %1 indicating IAFIS transaction %2, with SCN2 = %3, could not be associated with its request. | 3 | MTY | ICN | SCN2 |
| S0002 | General segment error | A general segment error was detected that is not currently defined. Optional error message: %1 %2%3. | 0-3 | Free Text | Free Text | Free Text |

Formatted: Tabs: 9", Right + Not at 7"
 Deleted: 002
 Deleted: .
 Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|---|--|-------|-----------|-----------|-----------|
| S0003 | Invalid Environment | The message environment does not match the current environment. | 0 | | | |
| S0004 | Transaction in Progress | A repeated message was received for which the transaction has already been started | 0 | | | |
| S0005 | Tenprint Search Notification Error | An error occurred during the routing and reporting of AFIS tenprint search notification. | 0 | | | |
| S0006 | Bitmap Generation Error | An error occurred during the generation or handling of the file comparison bitmap related to repository %1. | 1 | NDR | | |
| S0007 | Repository Statistics Error | The repository statistics file is corrupted or unavailable. | 0 | | | |
| S0008 | AFV Checksum Error | The Checksum provided with the AFV is wrong. Check for encoding or transmission error. | 0 | | | |
| W0001 | Reserved for AFIS | | | | | |
| W0002 | Manual Arrest Records | The Criminal History of subject %1 is contained in the FBI manual files. | 1 | FNU | | |
| W0003 | Unassigned FBI Number | Subject %1 may be in the FBI manual files, but does not exist in the Criminal History Files. | 1 | FNU | | |
| W0004 | Existing Post-Consolidation Information in Record | The consolidated record with kept FBI number %1 that was restored to unconsolidated records had information entered since the consolidation. | 1 | FBK | | |
| W0005 | Route to Wants | Route the document to Wants. | 0 | | | |
| W0006 | AUD T Subject | Requested service involves an AUD T subject. Route transaction to Special Stops for review prior to further action. | 0 | | | |
| W0007 | Ident Status Warning | Response for this submission may be non- Ident because this SCH record contains non-disseminable data. | 0 | | | |
| W0008 | Sealed Record Ident Status Warning | Response for this submission included an NFF subject and may be a non-Ident because the record is sealed. | 0 | | | |
| W0009 | Route to Dead Desk | The Subject Criminal History Record has been restored, however, the transaction requires further review. Route the hardcopy document to the Dead Desk. | 0 | | | |

Formatted: Tabs: 9", Right + Not at 7"
 Deleted: 002
 Deleted: .
 Deleted: APRIL 1, 2008

Table M-1. Transaction Error Messages

| Code | Error Condition | MDD Error Description | Count | Insert #1 | Insert #2 | Insert #3 |
|-------|------------------------------|---|-------|-----------|-----------|-----------|
| W0010 | Route to Wants and Dead Desk | The Subject Criminal History Record has been restored, however, the transaction requires further review. Route the hardcopy document to the Wants Unit and then to the Dead Desk. | 0 | | | |

IAFIS-DOC-01078-8.1

M-12

MMMMM 99, 9999

Formatted: Tabs: 9", Right + Not at 7"

Deleted: 002

Deleted: .

Deleted: APRIL 1, 2008

APPENDIX N

CIVIL BACKGROUND CHECKS USING FLAT IMPRESSIONS DESCRIPTORS AND FIELD EDIT SPECIFICATIONS FOR TYPE-14 LOGICAL RECORDS

This section presents the descriptors and field specifications for Type-14 logical records used with flats-based civil background checks. The flat fingerprint impressions are contained in three Type-14 image records. Two of the image records contain the left and right simultaneous four finger impressions, and the third contains the two thumbs. Offsets to the locations of image segments containing the individual fingers are included with the image records. Most of the following definitions are taken from the ANSI standard, Data Format for the Interchange of Fingerprint, Facial, & Other Biometric Information (ANSI/NIST-ITL 1-2007). Additional fields are defined to contain the NIST Fingerprint Image Quality (NFIQ) metric, alternate image quality metrics, and metrics for predicting the correctness of the segmentation. Table N-1 summarizes the content of each of the fields in the Type-14 record. However, the byte counts do not account for any separator characters.

AFM 14.024 – Alternate Fingerprint Quality Metric. This ASCII field is used to specify one or more different metrics of fingerprint image quality score data for the image stored in this record. The meaning attributed to this metric must be defined and interpreted by the producer of the scoring algorithm or by the person or system used to assign the metric to the fingerprint image. The metric may be a predictor of AFIS matcher accuracy performance or a different metric to indicate a value associated with the quality of the fingerprint image for a particular function.

This field may contain one or more subfields, each consisting of four information items separated by the S separator character. The first information item is the finger number as chosen from Table 12. The other three items identify a quality score and the algorithm used to create the quality score. This information is useful to enable the recipient of the quality score to differentiate between quality scores generated by different algorithms and adjust for any differences in processing or analysis as necessary.

1. The second information item shall be a quantitative expression of the predicted matching performance of the biometric sample. This item contains the ASCII representation of the integer image quality score between 0 and 100 assigned to the image data by a quality algorithm. Higher values indicate better quality. An entry of "255" shall indicate a failed attempt to calculate a quality score. An entry of "254" shall indicate that no attempt to calculate a quality score was made. The use of additional values to convey other information should be harmonized with ISO/IEC 19794 standards.

2. The third information item shall specify the integer value that is the ID of the vendor of the quality algorithm used to calculate the quality score. The IBIA shall maintain the Vendor Registry, which will map the value in this field to a registered organization.

3. The fourth information item shall specify a numeric product code assigned by the vendor of the quality algorithm, which may be registered with the IBIA, but registration is not required. It

Deleted: <

Deleted: US>

Deleted: ¶

Deleted: ¶

Deleted: ¶

Deleted: ¶

Deleted: 002

Formatted: Position: Horizontal: 4.25", Relative to: Page, Vertical: -0.02", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6"

Deleted: APRIL 1, 2008

IAFIS-DOC-01078-8.1

N-1

MMMMM 99, 9999

indicates which of the vendor's algorithms was used in the calculation of the quality score. This field contains the ASCII representation of the integer product code and should be within the range 1 to 65,535.

This subfield is repeated for each finger image and quality algorithm used, separated by the $\text{\$}$ character.

AMP 14.018 - Amputated or Bandaged. This optional ASCII field shall specify if one or more fingers are amputated or bandaged. This field shall consist of one subfield for each amputated or missing finger. Each subfield shall contain two information items separated by the $\text{\$}$ separator. The first item is the finger number between one and ten as chosen from Table 12 in the ANSI-NIST ITL 2007 Standard. The second item is the amputated or bandaged code (AMPCD). The following is a list of allowable indicators for the AMPCD:

| <u>Descriptor</u> | <u>AMPCD</u> |
|---|--------------|
| <u>Amputation</u> | <u>XX</u> |
| <u>Unable to print (e.g., bandaged)</u> | <u>UP</u> |

Multiple finger positions shall be separated by the $\text{\$}$ separator. This field is to be used anytime there are fewer than expected printable fingers in a submission (e.g., less than four in a left or right slap or less than two in the two-thumb slap). A partially scarred finger should be printed.

BPX 14.012 – Bits Per Pixel. This mandatory ASCII field shall contain the number of bits used to represent a pixel. This field shall contain an entry of 8 for normal grayscale values of 0 to 255.

CGA 14.011 – Compression Algorithm. This mandatory ASCII field shall specify the algorithm used to compress grayscale images. An entry of "NONE" in this field indicates that the data contained in this record are uncompressed. For those images that are to be compressed, this field shall contain "WSQ20" the preferred method for the compression of tenprint-fingerprint images.

COM 14.020 – Comment. This optional field may be used to insert comments or other ASCII text information with the tenprint image data.

DAT 14.999 – Image Data. This field shall contain all of the data from a captured tenprint image. It shall always be assigned field number 999 and must be the last physical field in the record. For example, 14.999: is followed by image data in a binary representation. Each pixel of uncompressed grayscale data shall be quantized to eight bits (256 gray-levels) contained in a single byte. If compression is used, the pixel data shall be compressed in accordance with the compression technique specified in the CGA field.

DMM 14.030 – Device Monitoring Mode. This optional field provides information describing the level of human monitoring for the image capture device. This field will contain an entry

- Deleted: <
- Deleted: RS>
- Formatted: Font: Bold, Underline
- Formatted: Indent: Left: 0", First line: 0"
- Formatted: Font: Bold

- Deleted: 002
- Formatted: Position: Horizontal: 4.25", Relative to: Page, Vertical: -0.02", Relative to: Paragraph
- Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6"
- Deleted: APRIL 1, 2008

from Table 26 of ANSI/NIST-ITL 1-2007 to indicate the monitoring mode of the biometric sample capture device.

Table 26. Device Monitoring Modes

| Condition | Description |
|------------|--|
| ASSISTED | Person available to provide assistance to subject submitting the biometric |
| OBSERVED | Person present to observe operation of the device but provides no assistance |
| UNATTENDED | No one present to observe or provide assistance |
| UNKNOWN | No information is known |

FGP 14.013 – Finger Position. This mandatory tagged field shall contain finger position code that matches the tenprint image. The decimal code number corresponding to the known or most probable finger position shall be taken from Table N-1 and entered as a one- or two-character ASCII subfield. Table 1 also lists the maximum image area that can be transmitted for each of the 14 possible finger positions.

Table N-1. Finger Position Code & Maximum Size

| Finger Position | Finger Code | Width | | Length | |
|--------------------------|-------------|-------|------|--------|------|
| | | (mm) | (in) | (mm) | (in) |
| Unknown | 0 | 40.6 | 1.6 | 38.1 | 1.5 |
| Right thumb | 1 | 40.6 | 1.6 | 38.1 | 1.5 |
| Right index finger | 2 | 40.6 | 1.6 | 38.1 | 1.5 |
| Right middle finger | 3 | 40.6 | 1.6 | 38.1 | 1.5 |
| Right ring finger | 4 | 40.6 | 1.6 | 38.1 | 1.5 |
| Right little finger | 5 | 40.6 | 1.6 | 38.1 | 1.5 |
| Left thumb | 6 | 40.6 | 1.6 | 38.1 | 1.5 |
| Left index finger | 7 | 40.6 | 1.6 | 38.1 | 1.5 |
| Left middle finger | 8 | 40.6 | 1.6 | 38.1 | 1.5 |
| Left ring finger | 9 | 40.6 | 1.6 | 38.1 | 1.5 |
| Left little finger | 10 | 40.6 | 1.6 | 38.1 | 1.5 |
| Plain right thumb | 11 | 25.4 | 1.0 | 50.8 | 2.0 |
| Plain left thumb | 12 | 25.4 | 1.0 | 50.8 | 2.0 |
| Plain right four fingers | 13 | 81.3 | 3.2 | 76.2 | 3.0 |
| Plain left four fingers | 14 | 81.3 | 3.2 | 76.2 | 3.0 |
| Left and Right thumbs | 15 | 81.3 | 3.2 | 76.2 | 3.0 |

HLL 14.006 – Horizontal Line Length. This mandatory ASCII field shall contain the number of pixels contained on a single horizontal line of the transmitted image.

Deleted: 002
 Formatted: Position: Horizontal: 4.25", Relative to: Page, Vertical: -0.02", Relative to: Paragraph
 Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6"
 Deleted: APRIL 1, 2008

HPS 14.009 – Horizontal Pixel Scale. This mandatory ASCII field shall specify the integer pixel density used in the horizontal direction providing the SLC contains a “1” or a “2.” Otherwise, it indicates the horizontal component of the pixel aspect ratio.

IDC 14.002 – Image Designation Character. This mandatory ASCII field shall be used to identify the tenprint-fingerprint image contained in the record. This IDC shall match the IDC found in the file content (CNT) field of the Type-1 record.

IMP 14.003 – Impression Type. This mandatory one- or two-byte ASCII field shall indicate the manner by which the tenprint image information was obtained. The appropriate code (0-29) selected from Table 11 of the ANSI/NIST-ITL 1-2007 standard shall be entered in this field.

IQM 14.022 – Image Quality Metric. This mandatory ASCII field shall contain the image quality scores for the individual fingers. Each finger score is defined by the FINGER NUMBER and the QUALITY SCORE separated by the ^GS separator. Individual finger quality definitions are separated by the ^RS separator. This field will be accepted for legacy users only. All new IAFIS users will be required to populate the Alternate Fingerprint Quality Metric field (14.024 AFM).

Deleted: <
Deleted: US>
Deleted: <
Deleted: RS>

LEN 14.001 – Logical Record Length. This mandatory ASCII field shall contain the total count of the number of bytes in the Type-14 logical record. Field 14.001 shall specify the length of the record, including every character of every field contained in the record, and the information separators.

MCP 14.014 – Major Case Prints. This optional tagged field shall be present when the finger position code “19” appears in Field 14.013. This field shall consist of two mandatory information items. The first is the probable decimal finger position code (0-10) taken from Table 12. A “0” indicates that all the fingers of a possible candidate should be searched. The second information item is the code taken from Table 31 to indicate the portion of the major case print fingerprint image that is stored as a single image in the database. There may be up to 17 such images for a single finger. There may be up to four full-finger images in an entire joint image (EJI). These are numbered 1 to 4 as they appear left to right in the EJI and correspond to the x in FV_x.

Note: Fields 14.014 and 14.015 are included to make the standard flexible enough to accommodate many different scenarios and applications. These two fields facilitate searching of latents formatted within Type-13 records against Type-14 records contained in the various database files. The search of a latent against a database can be narrowed with the use of additional information such as finger position, finger segment, or full finger view. It is unlikely that an entire EJI will ever be left at the scene of a crime. But a latent can be searched against the EJIs in an image or features file based on a specific finger segment or full finger view. This can be accomplished for a portion of the latent described by the X and Y coordinates.

Deleted: ¶
Deleted: ¶
Deleted: ¶
Deleted: ¶

MPS 14.015 – Major Case Print Segment Positions. This optional ASCII field may contain offsets to the locations for the bounding box of the EJI, each of the full-finger views, or segments within the EJI. When used, this field shall consist of six mandatory information items to describe the type or portion of the image and its location within an entire joint image. The first

Deleted: 002
Formatted: Position: Horizontal: 4.25", Relative to: Page, Vertical: -0.02", Relative to: Paragraph
Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6"
Deleted: APRIL 1, 2008

information item is the number of the full-finger view with values of “FV0” through “FV4.” A value of “FV0” is used to specify the bounding coordinates for all of the combined full-finger views within the EJI. Values of “FV1” to “FV4” specify the bounding coordinates for each full-finger view. The second information item is used to identify the location of a segment within a full-finger view. It will contain the not applicable code “NA” if the image portion refers to a full-finger view or to the entire joint image locations. It shall contain “PRX,” “DST,” “MED” for a proximal, distal, or medial segment. The next four information items are the horizontal and vertical offsets relative to the origin positioned in the upper left corner of the image. The horizontal offsets (X) are the pixel counts to the right, and the vertical offsets (Y) are the pixel counts down. The location of the image portion is defined by the sequence of X coordinates (LEFT, RIGHT) and the Y coordinates (TOP, BOTTOM), of its bounding box. For the case of a fingertip, the first information item shall be “TIP,” and the second information item shall be “NA.” The next four information items are the horizontal and vertical offsets as defined above.

The six information items within the field are separated by five U separators. This information will describe either the location of the entire joint image, one full-finger view, or segment.

Individual full-finger or segment definitions may be repeated as subfields separated by the R separator.

Deleted: <US>

Deleted: <

Deleted: RS>

SEG 14.021 – Finger Segment Position(s). This mandatory ASCII field shall contain offsets to the locations of image segments containing the individual fingers within the image. The offsets are relative to the origin (0,0), which is in the upper left corner of the image. The horizontal offsets (X) are the pixel counts to the right, and the vertical offsets (Y) are the pixel counts down. A finger segment is defined by the FINGER NUMBER, the X coordinates (LEFT, RIGHT), and the Y coordinates (TOP, BOTTOM) of its bounding box. The five information items within a finger segment definition are separated by the U separator. Individual finger segment definitions are separated by the R separator.

Deleted: <

Deleted: US>

Deleted: <

Deleted: RS>

SHPS 14.016 – Scanned Horizontal Pixel Scale. This optional ASCII field shall specify the horizontal pixel density used for the scanning of the original impression providing the SLC field contains a “1” or “2.” Otherwise, it indicates the horizontal component of the pixel aspect ratio.

SVPS 14.017 – Scanned Vertical Pixel Scale. This optional ASCII field shall specify the vertical pixel density used for the scanning of the original impression providing the SLC field contains a “1” or a “2.” Otherwise, it indicates the vertical component of the pixel aspect ratio.

SLC 14.008 – Scale Units. This mandatory ASCII field shall specify the units used to describe the image sampling frequency (pixel density). A “1” in this field indicates pixels per inch; a “2” indicates pixels per centimeter. A “0” in this field indicates no scale is given. For this case, the quotient of HPS/VPS gives the pixel aspect ratio.

Deleted: <

Deleted: US>

Deleted: 002

Formatted: Position: Horizontal: 4.25", Relative to: Page, Vertical: -0.02", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6"

Deleted: APRIL 1, 2008

SQM 14.023 – Segmentation Quality Metric. This optional ASCII field provides a measure of estimated correctness regarding the accuracy of the location of the segmented finger within the right or left four fingers or two thumbs slap image. For each segmented finger, this field shall contain four information items separated by the U separator character. The first information item is the finger number between one and ten as chosen from Table 12. The other three items identify a quality score and the algorithm used to create the quality score. This information is

useful to enable the recipient of the quality score to differentiate between quality scores generated by different algorithms and adjust for any differences in processing or analysis as necessary.

1. The second information item shall be a measure of estimated correctness regarding the accuracy of the location of the segmented finger. This item contains the ASCII representation of the integer image quality score between 0 and 100 assigned to the image data by a quality algorithm. Higher values indicate better quality. An entry of "255" shall indicate a failed attempt to calculate a quality score. An entry of "254" shall indicate that no attempt to calculate a quality score was made. The use of additional values to convey other information should be harmonized with ISO/IEC 19794 standards.

Deleted: ¶

Deleted: ¶

Deleted: ¶

2. The third information item shall specify the integer value that is the ID of the vendor of the quality algorithm used to calculate the quality score. The IBIA shall maintain the Vendor Registry of CBEFF Biometric Organizations that will map the value in this field to a registered organization.

Deleted: ¶

3. The fourth information item shall specify a numeric product code assigned by the vendor of the quality algorithm, which may be registered with the IBIA, but registration is not required. It indicates which of the vendor's algorithms was used in the calculation of the quality score. This field contains the ASCII representation of the integer product code and should be within the range 1 to 65,535. This subfield is repeated for each segmented finger whose coordinates appear in field 14.021.

Deleted: ¶

The **R** character separates each set of four information items. For the case where more than one segmentation algorithm is applied to a multi-finger plain image, the set of segmentation information items for each finger shall be ordered corresponding to the entries in field 14.021.

Deleted: <

Deleted: RS>

SRC 14.004 – Source Agency. This mandatory ASCII field shall contain the identification of the administration or organization that originally captured the tenprint image contained in the record. Normally, the ORI of the agency that captured the image will be contained in this field. The SRC may contain up to 43 identifying characters. The data content of this field shall be defined by the user and be in accordance with the receiving agency.

TCD 14.005 – Tenprint Capture Data. This mandatory ASCII field shall contain the date that the tenprint image was captured. The date shall appear as eight digits in the format CCYYMMDD. The CCYY characters shall represent the year the image was captured; the MM characters shall be the tens and units values of the month; and the DD characters shall be the tens and units values of the day in the month. For example, the entry 20000229 represents February 29, 2000. The complete date must be a legitimate date.

VLL 14.007 – Vertical Line Length. This mandatory ASCII field shall contain the number of horizontal lines contained in the transmitted image.

Deleted: 002

Formatted: Position: Horizontal: 4.25", Relative to: Page, Vertical: -0.02", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6"

Deleted: APRIL 1, 2008

VPS 14.010 – Vertical Pixel Scale. This mandatory ASCII field shall specify the integer pixel density used in the vertical direction providing the SLC contains a “1” or a “2.” Otherwise, it indicates the vertical component of the pixel aspect ratio.

| IAFIS-DOC-01078-8.1

N-7

~~MMMMM 99, 9999~~

Deleted: 002

Formatted: Position: Horizontal: 4.25", Relative to: Page, Vertical: -0.02", Relative to: Paragraph

Formatted: Tabs: 3.25", Centered + 6.5", Right + Not at 3" + 6"

Deleted: APRIL 1, 2008

TABLE N-2. Field List for Flats Civil Check Type-14 Record

| Identifier | Condition | Field Number | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Maximum Number of Bytes ... | Example Data |
|----------------|--------------|-------------------|-----------------------------------|----------------|---------------------------|--------------|--------------|--------------|--------------------------------|--------------------------------------|
| | | | | | Min | Max | Min | Max | | |
| LEN | M | 14.001 | LOGICAL REC LENGTH | N | 4 | 8 | 1 | 1 | 15 | 14.001:40164<GS> |
| IDC | M | 14.002 | IMAGE DESIGNATION CHAR | N | 2 | 5 | 1 | 1 | 12 | 14.002:01<GS> |
| IMP | M | 14.003 | IMPRESSION TYPE | A | 2 | 3 | 1 | 1 | 10 | 14.003:0<GS> |
| SRC | M | 14.004 | SOURCE AGENCY/ORI | AN | 10 | 21 | 1 | 1 | 28 | 14.004:CA0000001<GS> |
| TCD | M | 14.005 | TENPRINT CAPTURE DATE | N | 9 | 9 | 1 | 1 | 16 | 14.005:20040227<GS> |
| HLL | M | 14.006 | HORIZONTAL LINE LENGTH | N | 4 | 5 | 1 | 1 | 12 | 14.006:1600<GS> |
| VLL | M | 14.007 | VERTICAL LINE LENGTH | N | 4 | 5 | 1 | 1 | 12 | 14.007:1450<GS> |
| SLC | M | 14.008 | SCALE UNITS | N | 2 | 2 | 1 | 1 | 9 | 14.008:1<GS> |
| HPS | M | 14.009 | HORIZONTAL PIXEL SCALE | N | 2 | 5 | 1 | 1 | 12 | 14.009:500<GS> |
| VPS | M | 14.010 | VERTICAL PIXEL SCALE | N | 2 | 5 | 1 | 1 | 12 | 14.010:500<GS> |
| CGA | M | 14.011 | COMPRESSION ALGORITHM | A | 4 | 6 | 1 | 1 | 13 | 14.011:1<GS> |
| BPX | M | 14.012 | BITS PER PIXEL | N | 2 | 3 | 1 | 1 | 10 | 14.012:8<GS> |
| FGP | M | 14.013 | FINGER POSITION CODE | N | 2 | 2 | 1 | 6 | 25 | 14.013:13<GS> |
| MCP | O | 14.014 | MAJOR CASE PRINT | A/N | 6 | 7 | 0 | 1 | 14 | 14.014:<GS> |
| MPS | O | 14.015 | MAJOR CASE PRINT SEGMENT POSITION | A/N | 15 | 28 | 0 | 12 | 343 | 14.015:<GS> |
| SHPS | O | 14.016 | SCAN HOR PIXEL SCALE | N | 2 | 5 | 0 | 1 | 12 | 14.016:<GS> |
| SVPS | O | 14.017 | SCAN VER PIXEL SCALE | N | 2 | 5 | 0 | 1 | 12 | 14.017:<GS> |
| RSV | O | 14.018-14.019 | RESERVED FOR FUTURE DEFINITION | -- | -- | -- | -- | -- | -- | -- |
| COM | O | 14.020 | COMMENT | A/N | 2 | 128 | 0 | 1 | 135 | 14.020:<GS> |
| SEG | O | 14.021 | FINGER SEGMENTATION POSITIONS | N | 10 | 23 | 0 | * | * | 14.021:<GS> |

Deleted: 5

Deleted: 002

Deleted: APRIL 1, 2008

| Identifier | Condition | Field Number | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Maximum Number of Bytes ... | Example Data |
|------------|----------------|---------------|--------------------------------------|----------------|---------------------------|-----|-------------|-----|--|---|
| | | | | | Min | Max | Min | Max | | |
| | | | | | | | | | | |
| SEG | M | 14.021 | SEGMENT POSITION | | | 2 | 4 | 99 | 14.021:10<US>3<US>352<US>725<US>1265<RS> | |
| | M | | FINGER NUMBER | N | 1 | 2 | 1 | 1 | 9<US>375<US>750<US>175<US>765<RS> | |
| | M | | LEFT | N | 1 | 4 | 1 | 1 | 8<US>800<US>1150<US>5<US>581<RS> | |
| | M | | RIGHT | N | 1 | 4 | 1 | 1 | 7<US>1200<US>1598<US>274<US>801<GS> | |
| | M | | TOP | N | 1 | 4 | 1 | 1 | | |
| | M | | BOTTOM | N | 1 | 4 | 1 | 1 | | |
| IQM | O* | 14.022 | IMAGE QUALITY METRIC | | | 2 | 4 | 58 | 14.022:10<US>6<RS>9<US>4<RS>8<US>3<RS>7<US>3<GS> | |
| | 0 | | FINGER NUMBER | N | 1 | 2 | 1 | 1 | | |
| | 0 | | QUALITY SCORE | N | 1 | 2 | 1 | 1 | | |
| SQM | M | 14.023 | SEGMENTATION QUALITY METRIC | N | 16 | 76 | 0 | * | * | 14.023:10<US>75<US>IBIA VENDOR ID#<US>VENDOR QUALITY ALGORITHM ID<GS> |
| AFM | M ¹ | 14.024 | ALTERNATE FINGERPRINT QUALITY METRIC | N | 16 | 76 | 0 | * | * | 14.024:10<US>255<US>IBIA VENDOR ID<US>VENDOR ALGORITHM ID #<GS> |
| RSV | | 14.025-14.029 | RESERVED FOR FUTURE DEFINITION | -- | -- | -- | -- | -- | -- | |
| DMM | O | 14.030 | DEVICE MONITORING MODE | A | 8 | 11 | 0 | 1 | 18 | 14.030:ASSISTED<GS> |
| RSV | | 14.031-14.199 | RESERVED FOR FUTURE DEFINITION | -- | -- | -- | -- | -- | -- | |
| UDF | O | 14.200-14.998 | USER-DEFINED FIELDS | -- | -- | -- | -- | -- | -- | |
| DAT | M | 14.999 | IMAGE DATA | B | 2 | -- | 1 | 1 | -- | 14.999:<IMAGE DATA COMPRESSED@ 15:1> <FS> |

Deleted: 3

Deleted: 002

Deleted: APRIL 1, 2008

APPENDIX N NOTES

1. IMQ (14.022) is accepted for legacy users only. New IAFIS users are required to populate the Alternate Fingerprint Image Quality Metric field (14.024 AFM). Eventually, all users will be required to use 14.024 instead of 14.022.

| IAFIS-DOC-01078-8.1

N-10

~~MMMMM 99, 9999~~

Formatted: Tabs: 3.13", Centered + 6.5", Right + Not at 3" + 4.75"

Deleted: 002

Deleted: APRIL 1, 2008

APPENDIX AC

ACRONYMS

| | |
|-------|--|
| A | Army |
| AA | Plain Arch |
| ABIS | DoD Automated Biometric Identification System |
| AC | Approximate Finger Class |
| ACN | Action to be Taken |
| AF | Air Force Serial Number |
| AFIS | Automated Fingerprint Identification System |
| AFM | Alternate Fingerprint Quality Metric |
| AFV | AFIS Feature Vector |
| AGR | Age Range |
| AKA | Aliases |
| AMN | Amnesia Victim |
| AMP | Amputated or Bandaged |
| AMPCD | Amputated or Bandaged Code |
| AN | Non-Immigrant Admission Number |
| ANS | Alphanumeric Special |
| ANSI | American National Standards Institute |
| AOL | Arrest Offense Literal |
| APAT | Pattern Classification |
| APB | Advisory Policy Board |
| AR | Alien Registration Number |
| AS | Air National Guard Serial Number, Army Serial Number, or National Guard Serial Number |
| ASCII | American National Standard Code for Information Interchange |
| ASL | Arrest Segment Literal |
| ATN | “Attention” Indicator |
| AU | Arch, Type Not Designated |
| BCD | Biometric Capture Date |
| BDB | Biometric Data Block |
| BDQ | Biometric Data Quality |
| BF | Bureau Fugitive Index Number |
| BFO | BDB Format Owner |
| BFT | BDB Format Type |
| BIR | Biometric Information Record |
| BPX | bits per pixel |
| BTY | Biometric Type |
| CAN | Candidate List |

Deleted: BAL . . . Bald¶

Deleted: BLK . . . Black¶
BLN . . . Blond or Strawberry Blond¶
BLU . . . Blue¶
BO . . . Both Criminal File and Civil
File¶

Deleted: BRO . . . Brown¶

Deleted: 002

Deleted: APRIL 1, 2008

| | |
|-------|--|
| CAR | Criminal Tenprint Submission (Answer Required) |
| CBEFF | Common Biometric Exchange File Format |
| CCN | Court Case Number |
| CDD | Court Disposition Date |
| CFS | Comparison Fingerprint Image Submission or Cancel Fingerprint Search |
| CG | Coast Guard Serial Number |
| CHQ | Characterization Quality |
| CI | Criminal File |
| CI | Central Pocket – Loop Whorl – Inner |
| CI | Canadian Social Insurance Number |
| CIN | Contributor Case Identifier Number |
| CIX | Contributor Case Identifier Extension |
| CJIS | Criminal Justice Information Services |
| CLQ | Classifier Quality |
| CM | Central Pocket – Loop Whorl – Meeting |
| CNA | Criminal Tenprint Submission (No Answer Necessary) |
| CNT | File Content |
| CO | Central Pocket – Loop Whorl – Outer |
| COF | Coordinate Offsets |
| COM | Comment |
| COTS | Commercial Off-the-Shelf |
| CPD | Subject Photo Delete Request |
| CPDR | Criminal Fingerprint Card Direct Route |
| CPL | Other Court Sentence Provision Literal |
| CPNU | Criminal Fingerprint Card Processing Non-Urgent |
| CPR | Subject Photo Request |
| CR | Criminal File |
| CRA | Core(s) Attributes |
| CRI | Controlling Agency Identifier |
| CRN | Civil Record Number |
| CRP | Core Position |
| CSA | CJIS Systems Agency |
| CSF | Cascaded Search Flag |
| CSL | Court Segment Literal |
| CSN | Candidate Sequence Number |
| CSP | Color Space |
| CSR | Civil Search Requested |
| CST | Case Title |
| CTF | Contrast Transfer Function |
| CTZ | Country of Citizenship |
| DAI | Destination Agency Identifier |
| DCS | Directory of Character Sets |
| DEK | Known Deceased |
| DEU | Unknown Deceased |
| DHS | Department of Homeland Security |
| DI | Central Pocket – Double Loop Whorl – Inner |

Formatted: English (U.S.)

Deleted: 002

Deleted: APRIL 1, 2008

| | |
|-------------|--|
| DLA | Delta(s) Attributes |
| DLT | Delta(s) Position |
| DM | Central Pocket – Double Loop Whorl – Meeting |
| DMI | Disposition Maintenance Indicator |
| DMM | Device Monitoring Mode |
| DO | Central Pocket – Double Loop Whorl – Outer |
| DOA | Date of Arrest |
| <u>DOCE</u> | <u>Department Order Channeling Electronic</u> |
| DOM | Domain Name |
| DOO | Date of Offense |
| DOS | Date of Arrest – Suffix |
| DPR | Date Printed |
| DSPE | Electronic Disposition Reporting |
| DSPR | Disposition Response |
| DST | Distal |
| DUI | Device Unique Identifier |
| EAD | Employer and Address |
| EBTS | <u>Electronic Biometric Transmission Specification (started with version 8 of this document)</u> |
| ECL | Eye Color |
| EFTS | <u>Electronic Fingerprint Transmission Specification (ended with version 7.1 of this document)</u> |
| EID | Employee Identification Number |
| EJ | Entire Joint Image |
| ELR | Evaluation Latent Fingerprint Submission Request |
| <u>EMUF</u> | <u>Electronic (In)/Manual (Out) User Fee</u> |
| ERRA | Administrative Transaction Error |
| ERRI | Image Transaction Error |
| ERRL | Latent Transaction Error |
| ERRT | Tenprint Transaction Error |
| ERS | Electronic Rap Sheet |
| ETC | Estimated Time to Complete |
| EXP | Response Explanation |
| EYE | Color Eyes |
| F | Air Force |
| FANC | Federal Applicant (No Charge) |
| FAUF | Federal Applicant User Fee |
| FBI | Federal Bureau of Investigation or FBI Number |
| FCP | Fingerprint Characterization Process |
| <u>FDSP</u> | <u>Electronic Fingerprint Disposition Submission</u> |
| FFN | FBI File Number |
| FGN | Finger Number |
| FGP | Finger Position |
| FID | Feature Identifier |
| FIS | Fingerprint Image Submission |
| FISR | Fingerprint Image Submission Response |

Formatted: English (U.S.)

Formatted: Indent: Left: 0", Hanging: 1", Line spacing: At least 12 pt

Deleted: .

Formatted: Indent: Left: 0", Hanging: 1"

Deleted: .

Formatted: Danish

Deleted: 002

Deleted: APRIL 1, 2008

| | |
|-----------------|--|
| FIU | Fingerprint Image(s) Updated |
| FMT | Minutiae Format |
| FNDR | Federal No-Charge Direct Route |
| FNR | Finger Number(s) Requested |
| FNU | FBI Number |
| FP | Fingerprint |
| FS | File Separator – indicates the record is complete (end of file) |
| FVR | Fingerprint Verification Report |
| FV _x | Full Finger View (x = a number) |
| G | Coast Guard |
| GCA | Grayscale Compression Algorithm |
| GEO | Geographic Area of Search |
| GMT | Greenwich Mean Time |
| GS | Group Separator – indicates a new field is to follow |
| GUI | Global Unique Identifier |
| HAI | Hair Color |
| HDV | CBEFF Header Version |
| HGT | Height |
| HLL | Horizontal Line Length |
| HPS | Horizontal Pixel Scale |
| HTR | Height Range |
| HW | hardware |
| IAFIS | Integrated Automated Fingerprint Identification System |
| IBIA | International Biometrics Industry Association |
| ICN | IAFIS Control Number |
| ICO | Identification Comments |
| ID | Identity or Identification |
| IDC | Image Designation Character |
| IID | Iris Image Data |
| IIE | Iris Image Enrollment |
| IIER | Iris Image Enrollment Request Response |
| III | Interstate Identification Index |
| IIR | Iris Images Requested |
| IMA | Image Capture Equipment |
| IMG | Image Data |
| IMP | Impression Type |
| IMT | Image Type |
| INCITS | International Committee for Information Technology Standards |
| IO | Identification Order Number |
| IPC | Image Property Code |
| IQM | Image Quality Metric |
| IQS | Image Quality Score |
| IRD | Iris Capture Date |
| IRQ | Fingerprint Image Request |
| IRR | Fingerprint Image Request Response |
| ISO | International Organization for Standardization |

Deleted: GRN . . . Green¶
GRY . . . Gray¶

Deleted: (Some kind of separator,
found on pp. 5, 72, and J-21)

Deleted: HAZ . . . Hazel¶

Deleted: 002

Deleted: APRIL 1, 2008

| | |
|-------------|--|
| <u>ISR</u> | <u>Image Summary Response</u> |
| ITL | Information Technology Laboratory |
| ITN | Identification, Tasking, and Networking |
| <u>ITF</u> | <u>International Terrorist File Request</u> |
| <u>ITFR</u> | <u>International Terrorist File Request Response</u> |
| JPEG | Joint Photographic Experts Group |
| LCD | Latent Capture Date |
| LCN | Latent Case Number |
| LCX | Latent Case Number Extension |
| LFFS | Latent Fingerprint Features Search |
| LFIS | Latent Fingerprint Image(s) Search |
| LFS | Latent Fingerprint Image(s) Submission |
| LFMR | Latent File Maintenance Response |
| LPNQ | Latent Penetration Query |
| LPNR | Latent Penetration Query Response |
| <u>LPU</u> | <u>Latent Print Unit</u> |
| LRSQ | Latent Repository Statistics Query |
| LRSR | Latent Repository Statistics Response |
| LS | Left Slant Loop |
| LSIR | Latent Search Ident Response |
| <u>LSMQ</u> | <u>Latent Search Status and Modification Query</u> |
| LSMR | Latent Search Status and Modification Response |
| LSR | Latent Submission Results |
| M | Marines |
| MAK | Make |
| MAP | Miscellaneous Applicant Civil |
| <u>MC</u> | <u>Marine Corps Serial Number</u> |
| MCL | Major Case Latent |
| MCP | Major Case Print |
| MCS | Major Case Image(s) Submission |
| MD | Mariner's Document or Identification Number |
| MDD | Message Data Dictionary |
| MDX | Minutiae Identification Index |
| MED | Medial |
| MET | Method |
| MFC | Message Field Code |
| MIL | Military Code |
| MIN | Minutiae |
| MMS | Make/Model/Serial Number |
| MNC | Maximum Number of Candidates |
| MNT | Minutiae Type Designation |
| MNU | Miscellaneous Identification Number |
| MODL | Model |
| MP | RCMP Identification of Fingerprint Section Number |
| MPR | Missing Person |
| MPS | Major Case Print Segment |

Deleted: MAR . . . Maroon¶

Deleted: 002

Deleted: APRIL 1, 2008

| | |
|--------|---|
| MRC | Minutiae and Ridge Count Data |
| MSG | Message [or] Status/Error Message (appears both ways) |
| MTD | Minutiae Type Designation |
| MTF | Modular Transfer Function or Modulation Transfer Function (appears both ways) |
| N | Navy |
| NA | National Agency Case Number |
| NAM | Name |
| NAR | Notification of Action Response |
| NCIC | National Crime Information Center |
| NCR | Number of Candidates Returned [or] Number of Candidates' Images Returned |
| NDR | Name of Designated Repository |
| N-FACS | National Fingerprint-Based Applicant Check Study |
| NFAP | Non-Federal Advanced Payment |
| NFF | National Fingerprint File |
| NFIQ | NIST Fingerprint Image Quality |
| NFUE | Non-Federal User-fee Expedite |
| NFUF | Non-Federal Applicant User Fee |
| NIR | Number of Images Requested |
| NIST | National Institute of Standards and Technology |
| NMN | Number of Minutiae |
| NNDR | Non-Federal No-Charge Direct Route |
| NOT | Note Field |
| NRC | Number of Required Candidates |
| NS | Navy Serial Number |
| NSR | Native Scanning Resolution |
| NTR | Nominal Transmitting Resolution |
| OA | Originating Agency Police or Identification Number |
| OCA | Originating Agency Case Number |
| OCP | Occupation |
| OEM | Original Equipment Manufacturer |
| OFO | Other federal organizations |
| OFR | Originating Fingerprint Reading System |
| ORI | Originating Agency Identifier |
| ORN | Orientation Uncertainty |
| PAS | Photo Acquisition Source |
| PAT | Pattern Level Classifications |
| PATCL | Pattern Classification Code |
| PAX | Photo Acquisition Source |
| PCD | Palmprint Capture Date |
| PDR | Photo Delete Response |
| PEN | Penetration Query Response |
| PHD | Photo Date |
| PHT | "Photo Available" Indicator |
| PI | Personal Identification Number (State Issued Only) |
| PI | Plain Whorl – Inner |
| PLP | Palmprint Position |

Deleted: MUL . . . Multicolored¶

Deleted: ONG . . . Orange¶

Formatted: English (U.S.)

Deleted: This is listed throughout the document as both Photo Delete Request and

Deleted: , with one instance of Photo Delete Request Response

Deleted: PLE . . . Purple¶

Deleted: 002

Deleted: APRIL 1, 2008

PM Plain Whorl – Meeting
 PNG Portable Network Graphics
 PO Plain Whorl – Outer
 POA Pose Offsent Angle
 POB Place of Birth
 POS Subject Pose
 PP Passport Number (U.S. only)
 PPA Palmprints Available
 PPE Palmprint Enrollment Request
 ppi pixels per inch
 PPR Palmprint Enrollment Response
 PRI Priority
 PRR Subject Photo Request Response
 PRX Proximal
 PRY Transaction Priority
 PS Port Security Card Number
 PTD Person Type Designator
 PTY Photo Type
 PUM Position Uncertainty
 PXS Photo Description
 QDD Query Depth of Detail
 QMS Quality Measure
 RAC Race
 RAE Rotation Angle of Eye
 RAP Request for Electronic Rap Sheet
 RAU Rotation Uncertainty
 RCD1 Ridge Core Delta One for Subpattern Classification
 RCD2 Ridge Core Delta Two for Subpattern Classification
 RCN1 Ridge Count Number One
 RCN2 Ridge Count Number Two
 RDG Minutiae Ridge Count Indicator
 REC Response Code
 RES Residence of Person Fingerprinted
 RET Retention Code
 RFC Request For Change
 RFP Reason Fingerprinted
 RFR Request Features Record
 RISC Repository for Individuals of Special Concern
 RMS Root Mean Squared
 ROV Region of Value
 RPIS Rapid Print Image Search
 RPSR Rapid Print Image Search Response
 RPR Request Photo Record
 RS Record Separator – indicates a repetition of field or group of subfields are to follow*
 RSO Octant Residuals
 RSR Repository Statistics Response

Deleted: PNK . . . Pink¶

Deleted: This appears in different places as

Deleted: and as Photo Request Response (p. iv)

Deleted: (p. iii), also Record of Arrests and Prosecutions (p. 31)

Deleted: RBE . . . Rap Back Eligibility¶
 RBR . . . Rap Back Request¶
 RBRO . . . Rap Back Record Owner¶
 RBVS . . . Rap Back Verification Status¶

Deleted: RBE . . . Rap Back Eligibility Request¶
 RBER . . . Rap Back Eligibility Response¶
 RBFD . . . Rap Back Flag Delete Request¶
 RBHN . . . Rap Back Hit Notification Request¶
 RBM . . . Rap Back Maintenance Request¶
 RBMR . . . Rap Back Maintenance Response¶
 RBR . . . Rap Back Request¶
 RBRE . . . Rap Back Record Enrollment¶
 RBRO . . . Rap Back Record Owner¶
 RBV . . . Rap Back Verification Request¶
 RBVS . . . Rap Back Verification Status¶

Formatted: Highlight

Deleted: RED . . . Red or Auburn¶

Formatted: Right: -0.5", Tabs: Not at 6.5"

Deleted: 002

Deleted: APRIL 1, 2008

| | |
|-------|--|
| RSV | Reserved |
| RTID | (Canada) Real Time Identification |
| SAN | State Arrest Number |
| SAP | Subject Acquisition Profile |
| SCNA | AFIS Segment Control Number |
| SCO | Send Copy To |
| SDOB | Submitted Date of Birth |
| SEC | Subject Eye Color |
| SEG | Fingerprint Segment Position(s) |
| SERNO | Serial Number |
| SEX | Sex |
| SFP | Subject Feature Points |
| SHC | Subject Hair Color |
| SHPS | Scan Horizontal Pixel Scale |
| SID | State Identification Number |
| SLC | Scale Units |
| SLE | Custody or Supervisory Status Literal |
| SMD | SMT Descriptors |
| SMT | Scar, Mark and Tattoo |
| SMS | SMT Size |
| SNAM | Submitted Name |
| SOC | Social Security Account Number |
| SOR | Want or Sex Offender Registry |
| SPA | Subject Pose Angle |
| SPC | Special Population Cognizant Files |
| SPCN | Special Population Cognizant Number |
| SQM | Segmentation Quality Metric |
| SQS | Subject Quality Score |
| SRC | Source Agency |
| SRE | Submission Results – Electronic |
| SRF | Search Results Findings |
| SRL | Search Results — Latent |
| SRT | Search Results — Tenprint |
| SS | Selective Service Number |
| SSD | Custody or Supervisory Status Start Date |
| STD | Special Table Data |
| SVPS | Scan Vertical Pixel Scale |
| SW | Software |
| SXS | Subject Facial Description |
| TAA | Treat As Adult |

Deleted: SDY . . Sandy¶

Deleted: Three different definitions throughout: Custody or Supervisory, Custody or Supervisory Status, and

Deleted: (p. x)

Deleted: SPCA . . Special Population Cognizant File Record Add¶
 SPCAC . Special Population Cognizant File Add Confirm¶
 SPCD . . Special Population Cognizant File Record Delete¶
 SPCDC . Special Population Cognizant File Delete Confirm¶
 SPCM . . Special Population Cognizant File Modify¶
 SPCMC . Special Population Cognizant File Modify Confirm¶

Deleted: s

Deleted: 002

Deleted: APRIL 1, 2008

| | |
|-----------|---|
| TBD | To Be Determined |
| TBR | To be Resolved |
| TCD | Tenprint Capture Date |
| TCN | Transaction Control Number |
| TCR | Transaction Control Reference |
| TIP | Rolled Tip |
| TOT | Type of Transaction |
| TPFS | Tenprint Fingerprint Features Search |
| TPIS | Tenprint Fingerprint Image Searches |
| TPRS | Tenprint Rap Sheet |
| TPRR | Tenprint Rap Sheet Response |
| TSR | Type of Search Requested |
| TT | Tented Arch |
| UC | Unclassifiable [or] Unable to Classify |
| UCN | Universal Control Number |
| UDF | User-Defined Field |
| UDI | User-Defined Image |
| UK | United Kingdom |
| ULAC | Unsolved Latent Add Confirm Request |
| ULAR | Unsolved Latent Add Confirm Response |
| ULD | Unsolved Latent Record Delete Request |
| ULDR | Unsolved Latent Delete Response |
| ULF | Unsolved Latent File |
| ULM | Unsolved Latent Match Response |
| UP | Unable to Print |
| US | Unit Separator – indicates another subfield is to follow |
| US-VISIT | U.S. Visitor and Immigrant Status Indicator Technology |
| UTD | User-Defined Testing Date |
| UULD | Unsolicited Unsolved Latent Delete |
| V | Version |
| VA | Veterans Administration Claim Number |
| VAR | Value-Added Reseller |
| VER | Version |
| VID | Version Identifier |
| VLL | Vertical Line Length |
| VPS | Vertical Pixel Scale |
| WGT | Weight |
| WSQ | Wavelet Scalar Quantization |
| WTR | Weight Range |
| WU | Whorl, Type Not Designated |
| XI | Central Pocket – Accidental Whorl – Inner |
| XM | Central Pocket – Accidental Whorl – Meeting |
| XO | Central Pocket – Accidental Whorl – Outer |
| XXX | Unknown |

Deleted: WHI . . . White¶

Formatted: Indent: Left: 0", First line: 0", Tabs: 1", Left

Deleted: 002

Deleted: APRIL 1, 2008

| | | |
|-------------------------------------|-------------|-----------------------|
| Page 24: [1] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [2] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [3] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [4] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [5] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [6] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [7] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [8] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [9] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [10] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [11] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [12] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [13] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [14] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [15] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [16] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [17] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [18] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [19] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [20] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [21] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |

| | | |
|---|-------------|-----------------------|
| Page 24: [22] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [23] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [24] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [25] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [26] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [27] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [28] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [29] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [30] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [31] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [32] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [33] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [34] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [35] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 24: [36] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next, Keep lines together | | |
| Page 24: [37] Formatted | Cathy Wimer | 5/12/2008 12:51:00 PM |
| Keep with next | | |
| Page 1: [38] Formatted | Cathy Wimer | 5/7/2008 10:25:00 AM |
| Tabs: 6.38", Right + Not at 4.63" + 5.72" | | |
| Page 25: [39] Deleted | Cathy Wimer | 5/7/2008 10:21:00 AM |

Submissions: The types and quantities of logical records required in an electronic tenprint submission are as follows:

- X 1 Type-1 Header Record
- X 1 Type-2 Record

Nominally either,

X For criminal justice purposes (*e.g.*, CAR, CNA, CPDR, CPNU, and optionally DSPE)

X 14 Type-4 or Type-14 records as follows:

- 10 Rolled Impressions

4 Sets of Plain Impressions

X 0-20 Type-13 Supplemental Finger/Palmprint images (Future Capability)

X 0-8 Type-15 Palmprint Records

X 0-4 Type-10 Records containing photos

X 0-2 Type-17 Iris image records

X 0-N Type-99 CBEFF records (Future Capability)

Or

For non-criminal justice purposes (*e.g.*, FAUF, FANC, FNDR, NFUF, NFAP, NNDR, MAP) and with FBI coordination and authorization,

Either,

X 14 Type-4 or Type-14 records as follows

- 10 Rolled Impressions

- 4 Sets of Plain Impressions

Or,

X 3 Type-14 records (refer to Appendix N) as follows:

- 2 Plain Simultaneous Four Finger Impressions

- 1 Plain Left and Right Thumb Impression

Or, for FVR,

X 2-10 Type-4 or Type-14 flat or rolled fingerprint images

And,

X 0-12 Type-14 Major Case Print images

X 0-8 Type-15 Palmprint Records may be submitted with FAUF, FANC, FNDR, NFUF, NNDR, and MAP transactions if the retention field (2.005 RET) is set to "Y"

X 0-4 Type-10 Records containing photos may be submitted with AMN, DEK, DEU, MPR, FANC, FAUF, FNDR, MAP, NFAP, NFUF, and NNDR transactions if the retention field (2.005 RET) is set to "Y"

X 0-2 Type-17 Iris image records may be submitted with FAUF, FANC, FNDR, NFUF, NNDR, and MAP transactions if the retention field (2.005 RET) is set to “Y”

X 0-N Type-99 CBEFF records (Future Capability)

(See Appendix C write-up of the AMP field for how to handle submissions with fewer than 10 printable fingers.)

Responses: In response to an electronic tenprint submission, the following logical records will be returned:

- X 1 Type-1 Header Record
- X 1 Type-2 Record
- X 0-1 Type-10 Photo record containing the most recent mug shot

3.2.1.6 Rapid Print Image Search (RPIS) and Response (RPSR) (Future Capability)

This transaction is provided by the FBI to enable rapid fingerprint searches implemented as part of the FBI’s Repository for Individuals of Special Concern (RISC). RISC provides the capability to perform a rapid fingerprint search (with from two to ten rolled or flat fingerprint images) against a special file containing the most wanted individuals, including, among others, identified terrorists, wanted aliens, or other international subjects identified as a threat to the United States. Rapid Print Image Search (RPIS) transactions will provide a 10-second or less response to searches from authorized agencies; the response transaction (RPSR) consists of a red/yellow/green-light indicator corresponding to the match results against IAFIS tenprint repositories. Red indicates a hit has been made against an identified threat subject. Green indicates there are no disseminable hits. Yellow indicates a need for further investigation. As stated in paragraph 3.2, for a red light response, a criminal history will be returned for any candidates (similar to TPRR), as well as the most recent full frontal photo if requested, on file and disseminable. Additionally, further information describing the SRF value will be provided to the contributor in the Action to be Taken (ACN) field of the response. Edit specifications for the fields used may be found in Table C-1.

Note: RPIS is a limited-use TOT that requires coordination with FBI prior to use.

Input: The types and quantities of logical records required to submit a fingerprint investigative search are as follows:

- X 1 Type-1 Header Record
- X 1 Type-2 Record
- 1-10 Type-4 or Type-14 Fingerprint Image Records or Type-9 Fingerprint Features Records containing rolled impressions or features

Response: In response to a fingerprint investigative search request, the following logical records will be returned:

- X 1 Type-1 Header Record
- X 1 Type-2 Record
- 0-14 Type-4 or Type-14 Fingerprint Image Records containing the requested fingerprint images of the first candidate (SRT only)
- 0-1 Type-10 record containing the most recent full frontal photo of the number one candidate if requested, on file and disseminable (RPSR only)

The remaining candidates' fingerprints may be retrieved via a request for fingerprint image transaction (see IRQ in paragraph 3.6.1.1).

Requests: The types and quantities of logical records required to submit a latent search request are as follows:

- 1 Type-1 Header Record
- X 1-2 Type-2 Record
- X 1-10 Type-4, Type-7, Type-13, or Type-9 Record each containing the image of a latent fingerprint or the native-mode characteristics of a latent fingerprint. (Type-4, Type-7, and Type-13 records may not be combined in any single search message. However, Type-4, Type-7, or Type-13 records may accompany Type-9 records in a features search message.)

Note: The Latent Penetration Query (LPNQ) and Latent Search IDENT Response (LSIR) do not require the Type-4, Type-7, Type-13, or Type-9 submission.

Response: In response to a latent search, the following logical records will be returned:

- X 1 Type-1 Header Record
- X 1 Type-2 Record
- X 0-NCR Type-4 or Type-14 Fingerprint Image Records where NCR is the maximum number of candidate images the user has specified in the search message (see Appendix C regarding the NCR field - 2.079). The actual number of images returned may be fewer than NCR if fewer candidates resulted in the search. For example, if the user submits three fingers to be searched against the repository, specifying an NCR of 7 and only five candidates are returned, the user will receive five images: the top-scoring finger from each candidate. The image of the top-scoring latent match score fingers will be returned.

The remaining candidates' fingerprints may be retrieved via a request for fingerprint images using the IRQ transaction.

For the Latent Penetration Query Response, the penetration data will be in the Type-2 record. There is no response from the FBI to an LSIR transaction.

For the Unsolved Latent Match (ULM),

- X 1 Type-1 header record
- X 1 Type-2 record
- 1-10 Type-4 or Type-14 record (containing the image(s) of the candidate's finger that matched the latent print) and 0-10 Type-4, Type-7, or Type-13 records (containing the latent image from the Unsolved Latent File, if it exists in IAFIS).

| | | |
|-----------------------|----------------|----------------------|
| Page 43: [43] Deleted | Michael McCabe | 7/1/2008 11:42:00 PM |
|-----------------------|----------------|----------------------|

3.6.1.2 Image Request Response (IRR)

This transaction is returned by the FBI to provide requested images on file at the FBI to the requester. Each subject record identifier number in the request having images available causes a separate response. The response will include the subject record identifier number and the requested Type-4 or Type-14 fingerprint images. The specified fingerprint images will be transmitted in the response. If requested, the Type-9 features records will be included as well. The mandatory and optional fields for the IRR TOT are summarized in Table I-1 and the Field Edit Specifications for the fields that are used may be found in Table C-1.

| | | |
|-----------------------|-------------|---------------------|
| Page 55: [44] Deleted | Cathy Wimer | 6/3/2008 7:29:00 AM |
|-----------------------|-------------|---------------------|

is

| | | |
|-----------------------|-------------|---------------------|
| Page 55: [44] Deleted | Cathy Wimer | 6/3/2008 7:29:00 AM |
|-----------------------|-------------|---------------------|

service

| | | |
|-----------------------|-------------|-----------------------|
| Page 55: [44] Deleted | Cathy Wimer | 6/27/2008 10:44:00 AM |
|-----------------------|-------------|-----------------------|

allow

| | | |
|-----------------------|-------------|---------------------|
| Page 55: [44] Deleted | Cathy Wimer | 6/3/2008 7:38:00 AM |
|-----------------------|-------------|---------------------|

so the authorized agency will

| | | |
|-----------------------|-------------|---------------------|
| Page 55: [44] Deleted | Cathy Wimer | 6/3/2008 7:39:00 AM |
|-----------------------|-------------|---------------------|

If not legally prohibited

| | | |
|-----------------------|-------------|-----------------------|
| Page 55: [44] Deleted | Cathy Wimer | 6/27/2008 10:45:00 AM |
|-----------------------|-------------|-----------------------|

allow

| | | |
|-----------------------|-------------|---------------------|
| Page 55: [44] Deleted | Cathy Wimer | 6/3/2008 7:39:00 AM |
|-----------------------|-------------|---------------------|

cycles are added to an individual's record

| | | |
|-----------------------|-------------|---------------------|
| Page 55: [45] Deleted | Cathy Wimer | 6/3/2008 7:40:00 AM |
|-----------------------|-------------|---------------------|

“

| | | |
|-----------------------|-------------|---------------------|
| Page 55: [45] Deleted | Cathy Wimer | 6/3/2008 7:41:00 AM |
|-----------------------|-------------|---------------------|

”

| | | |
|-----------------------|-------------|-----------------------|
| Page 55: [45] Deleted | Cathy Wimer | 6/27/2008 10:46:00 AM |
|-----------------------|-------------|-----------------------|

i.

| | | |
|-----------------------|-------------|-----------------------|
| Page 55: [45] Deleted | Cathy Wimer | 6/27/2008 10:46:00 AM |
|-----------------------|-------------|-----------------------|

and

| | | |
|-----------------------------------|-------------|-----------------------|
| Page 55: [45] Deleted criminal | Cathy Wimer | 6/27/2008 10:46:00 AM |
|-----------------------------------|-------------|-----------------------|

| | | |
|--|-------------|-----------------------|
| Page 55: [45] Deleted transmission/routing, | Cathy Wimer | 6/27/2008 10:46:00 AM |
|--|-------------|-----------------------|

| | | |
|-------------------------------------|-------------|---------------------|
| Page 55: [46] Deleted use of the | Cathy Wimer | 6/3/2008 7:45:00 AM |
|-------------------------------------|-------------|---------------------|

| | | |
|----------------------------|-------------|---------------------|
| Page 55: [46] Deleted R | Cathy Wimer | 6/3/2008 7:45:00 AM |
|----------------------------|-------------|---------------------|

| | | |
|--|-------------|---------------------|
| Page 55: [46] Deleted (2.052 RBR) field | Cathy Wimer | 6/3/2008 7:45:00 AM |
|--|-------------|---------------------|

| | | |
|---|-------------|-----------------------|
| Page 55: [46] Deleted criminal and civil | Cathy Wimer | 6/27/2008 10:47:00 AM |
|---|-------------|-----------------------|

| | | |
|-----------------------------------|-------------|---------------------|
| Page 55: [46] Deleted subjects | Cathy Wimer | 6/3/2008 7:45:00 AM |
|-----------------------------------|-------------|---------------------|

| | | |
|----------------------------------|-------------|---------------------|
| Page 55: [46] Deleted the FBI | Cathy Wimer | 6/3/2008 7:46:00 AM |
|----------------------------------|-------------|---------------------|

| | | |
|---|-------------|---------------------|
| Page 55: [46] Deleted retain and monitor | Cathy Wimer | 6/3/2008 7:46:00 AM |
|---|-------------|---------------------|

| | | |
|--|-------------|---------------------|
| Page 55: [46] Deleted These submissions will be allowed with the tenprint transactions detailed in Section 3.1 above. | Cathy Wimer | 6/3/2008 7:46:00 AM |
|--|-------------|---------------------|

| | | |
|---|-------------|---------------------|
| Page 55: [46] Deleted Prior coordination with FBI is required for use of this field. When the RBR field is included in the transaction, the value in the retention field (2.005 RET) must also be "Y." If RET is populated with "N," the transaction will be rejected via the ERRT transaction. The RBR field values will be as follows: "1" requests monitoring for criminal activity; "2" requests monitoring for civil activity; and "3" requests monitoring for both criminal and civil activity. Requesting agencies may list additional ORIs to receive hit notifications by listing the ORIs in the Rap Back Record Owner (2.058 RBRO) field. | Cathy Wimer | 6/3/2008 7:46:00 AM |
|---|-------------|---------------------|

| | | |
|---|-------------|---------------------|
| Page 55: [47] Formatted Heading 4, Outline numbered + Level: 4 + Numbering Style: 1, 2, 3, ... + Start at: 2 + Alignment: Left + Aligned at: 0" + Tab after: 0.63" + Indent at: 0.63", Tabs: Not at 0.5" | Cathy Wimer | 6/3/2008 7:53:00 AM |
|---|-------------|---------------------|

| | | |
|-----------------------------------|-------------|----------------------|
| Page 55: [48] Deleted 6 | Cathy Wimer | 5/7/2008 10:34:00 AM |
|-----------------------------------|-------------|----------------------|

| | | |
|---|-------------|---------------------|
| Page 55: [48] Deleted Type of Transaction Definitions | Cathy Wimer | 6/3/2008 7:55:00 AM |
|---|-------------|---------------------|

3.16.2.1

| | | |
|-------------------------------------|-------------|---------------------|
| Page 55: [48] Deleted Hit | Cathy Wimer | 6/3/2008 7:55:00 AM |
|-------------------------------------|-------------|---------------------|

| | | |
|-----------------------|-------------|---------------------|
| Page 55: [48] Deleted | Cathy Wimer | 6/3/2008 7:56:00 AM |
|-----------------------|-------------|---------------------|

(RBHN)

| | | |
|--|-------------|---------------------|
| Page 55: [49] Deleted n arrest record | Cathy Wimer | 6/3/2008 7:56:00 AM |
|--|-------------|---------------------|

| | | |
|----------------------------|-------------|---------------------|
| Page 55: [49] Deleted a | Cathy Wimer | 6/3/2008 7:56:00 AM |
|----------------------------|-------------|---------------------|

| | | |
|---|-------------|---------------------|
| Page 55: [49] Deleted (if requested) matches that of a subject with an | Cathy Wimer | 6/3/2008 7:57:00 AM |
|---|-------------|---------------------|

| | | |
|--------------------------------|-------------|---------------------|
| Page 55: [49] Deleted Hit N | Cathy Wimer | 6/3/2008 7:57:00 AM |
|--------------------------------|-------------|---------------------|

| | | |
|----------------------|-------------|----------------------|
| Page 1: [50] Deleted | Cathy Wimer | 5/7/2008 10:25:00 AM |
|----------------------|-------------|----------------------|

002

| | | |
|----------------------|-------------|----------------------|
| Page 1: [50] Deleted | Cathy Wimer | 5/7/2008 10:25:00 AM |
|----------------------|-------------|----------------------|

APRIL 1, 2008

| | | |
|-----------------------|-------------|---------------------|
| Page 56: [51] Deleted | Cathy Wimer | 6/3/2008 7:59:00 AM |
|-----------------------|-------------|---------------------|

2.2 Rap Back Flag Delete Request (Rbfd) (Future Capability)

Agencies may request that a Rap Back flag for a subject be deleted, resulting in a discontinuation of Rap Back monitoring, by submitting a Rap Back Flag Delete (Rbfd) request. The Subject Record Identifier is a mandatory field. The response to an Rbfd request will be a Rap Back Delete Response (Rbdr) transaction. Failed requests (*e.g.*, Subject Record Identifier does not exist) will be handled via the ERRT transaction.

Note: This transaction may be rolled into RBM transaction detailed in 3.16.2.4, therefore this transaction may not be used after final design has been completed.

3.16.2.3 Rap Back Verification Request (RBV) (Future Capability)

The Rap Back status of every subject for which monitoring has been requested will be validated on an annual basis. The FBI will send a Rap Back Verification Request (RBV) to the submitting agency (or agencies) of record for each Rap Back subject (as indicated by ORI in the RBRO field). Each submitting agency will return a Rap Back Verification Response (RBVR) for each subject. A negative response will result in the deletion of the Rap Back monitoring flag and transmission of an Rbdr transaction by the FBI. Rap Back subscription will also be deleted if NO RESPONSE (see description of field 2.480 Rap Back Verification Status in Appendix C) is received within a specified period of time, *e.g.*, grace period of 30 days, of the RBV being sent to the contributor (subscriber). IAFIS considers deletion as the default action.

3.16.2.4

| | | |
|-----------------------|-------------|---------------------|
| Page 56: [52] Deleted | Cathy Wimer | 6/3/2008 8:00:00 AM |
|-----------------------|-------------|---------------------|

It is acknowledged that agencies desiring notification of a Rap Back hit (for either criminal or civil purposes) may change subsequent to original request for Rap Back monitoring. Therefore, this transaction

| | | |
|-----------------------|-------------|---------------------|
| Page 56: [53] Deleted | Cathy Wimer | 6/3/2008 8:01:00 AM |
|-----------------------|-------------|---------------------|

The Rap Back Maintenance Request (RBM) will be used to provide a revised Rap Back Record Owner (RBRO) field that will replace the previous ownership of record for a particular subject in the database (the default value of RBRO will be recorded as the value in the CRI field if not otherwise indicated in the original Rap Back Request). The response to the RBM transaction will be a Rap Back Maintenance Response (RBMR). Failed requests (*e.g.*, Subject Record Identifier does not exist) will be handled via the ERRT transaction.

3.16.2.5 Rap Back Record Enrollment (RBRE) (Future Capability)

For existing criminal records with fingerprints on file with the FBI, agencies may request Rap Back services be provided without resubmitting fingerprints by providing a valid FBI number (although fingerprint images may be submitted with the request). The Rap Back record owner will be the originating agency ORI unless otherwise specified in the RBRO field. The response to the RBRE transaction will be a Rap Back Maintenance Response (RBMR). If the quoted FBI number is not found, an ERRT transaction will be returned.

3.16.2.6 Rap Back Eligibility Request (RBE) and Response (RBER) (Future Capability)

Prior to a Rap Back Record Owner receiving any hit notification, whether from a civil or criminal transaction, the FBI requires verification that the owner is still eligible to receive Rap Back Hit Notification (*e.g.*, the subject is still employed by that organization). This verification will be accomplished via a Rap Back Eligibility Request (RBE). Once a satisfactory response in the form of a Rap Back Eligibility Response (RBER) is received by the FBI, the RBHN will be sent. If a satisfactory response is not received, the hit notification will not be forthcoming.

Request: The types and quantities of logical records required to submit a Rap Back Request transaction are as follows:

- X 1 Type-1 header record
- X 1 Type-2 record.

Response: The response to a Rap Back Request transaction will include the following logical records:

- X 1 Type-1 header record
- X 1 Type-2 record.

DMI Codes

| External Code | Flag | Literal | Description |
|---------------|------|---------|--|
| Blank | NULL | Blank | Default to add disposition data (A) from incoming request to a specified DOA. |
| A | ADD | Add | Add disposition data from incoming request to a specified DOA. |
| D | APP | Append | Append disposition data from an incoming request to existing disposition data on a specified DOA. |
| R | RPL | Replace | Replace existing disposition data for a specified DOA with disposition data from incoming request. |
| X | DEL | Delete | Delete existing disposition data for specified DOA. |

Page 19: [57] Deleted Cathy Wimer 5/7/2008 3:26:00 PM
Middle Eastern M

Page 2: [58] Deleted Cathy Wimer 5/12/2008 3:00:00 PM

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Exam |
|------------|----------------|-----------|-------------------------------|----------------|---------------------------|------|-------------|------|---|--------------------|
| | | | | | Min. | Max. | Min. | Max. | | |
| LEN | M | 2.001 | LOGICAL RECORD LENGTH | N | 2 | 7 | 1 | 1 | 14 | 2.001:90 |
| IDC | M | 2.002 | IMAGE DESIGNATION CHARACTER | N | 2 | 2 | 1 | 1 | 9 | 2.002:02 |
| ATN | O | 2.006 | "ATTENTION" INDICATOR | ANS | 3 | 30 | 0 | 1 | 37 | 2.006:SA DOE,RM |
| SCO | O | 2.007 | SEND COPY TO | ANS | 9 | 19 | 0 | 9 | 186 | 2.007:NY > |
| FBI | C ⁵ | 2.014 | FBI NUMBER | AN | 1 | 9 | 0 | 1 | 16 | 2.014:62 |
| DOA | O ¹ | 2.045 | DATE OF ARREST | N | 8 | 8 | 0 | 1 | 15 | 2.045:199 |
| DOS | O | 2.046 | DATE OF ARREST - SUFFIX | A | 1 | 1 | 0 | 1 | 8 | 2.046:L< |
| CRI | M ² | 2.073 | CONTROLLING AGENCY IDENTIFIER | ANS | 1 | 9 | 1 | 3 | 36 | 2.073:NY |
| UCN | C ⁶ | 2.081 | UNIVERSAL CONTROL NUMBER | AN | 1 | 9 | 0 | 1 | 16 | 2.081:407 |
| NDR | M | 2.098 | NAME OF DESIGNATED REPOSITORY | N | 1 | 3 | 1 | 1 | 10 | 2.098:1< |
| PTY | O | 2.2009 | PHOTO TYPE | A | 4 | 6 | 1 | 1 | 14 | 2.2009:F |
| NIR | O | 2.2010 | NUMBER OF IMAGES REQUESTED | N | 1 | 2 | 1 | 1 | 9 | 2.2010:99 |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Exam |
|------------|----------------|-----------|-------------------------------|----------------|---------------------------|------|-------------|------|---|--------------------|
| | | | | | Min. | Max. | Min. | Max. | | |
| LEN | M | 2.001 | LOGICAL RECORD LENGTH | N | 2 | 7 | 1 | 1 | 14 | 2.001:909 |
| IDC | M | 2.002 | IMAGE DESIGNATION CHARACTER | N | 2 | 2 | 1 | 1 | 9 | 2.002:020 |
| ATN | O | 2.006 | "ATTENTION" INDICATOR | ANS | 3 | 30 | 0 | 1 | 37 | 2.006:SA DOE,RM |
| SCO | O | 2.007 | SEND COPY TO | ANS | 9 | 19 | 0 | 9 | 186 | 2.007:NY > |
| FBI | C ⁵ | 2.014 | FBI NUMBER | AN | 1 | 9 | 1 | 1 | 16 | 2.014:627 |
| DOA | M ⁴ | 2.045 | DATE OF ARREST | N | 8 | 8 | 1 | 1 | 15 | 2.045:199 |
| DOS | M | 2.046 | DATE OF ARREST - SUFFIX | A | 1 | 1 | 1 | 1 | 8 | 2.046:L< |
| CRI | M ² | 2.073 | CONTROLLING AGENCY IDENTIFIER | ANS | 1 | 9 | 1 | 3 | 36 | 2.073:NY |
| UCN | C ⁶ | 2.081 | UNIVERSAL CONTROL NUMBER | AN | 1 | 9 | 0 | 1 | 16 | 2.081:407 |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Exam |
|------------|----------------|-----------|-------------------------------|----------------|---------------------------|------|-------------|------|---|--------------------|
| | | | | | Min. | Max. | Min. | Max. | | |
| LEN | M | 2.001 | LOGICAL RECORD LENGTH | N | 2 | 7 | 1 | 1 | 14 | 2.001:909 |
| IDC | M | 2.002 | IMAGE DESIGNATION CHARACTER | N | 2 | 2 | 1 | 1 | 9 | 2.002:020 |
| ATN | O | 2.006 | "ATTENTION" INDICATOR | ANS | 3 | 30 | 0 | 1 | 37 | 2.006:SA DOE,RM |
| SCO | O | 2.007 | SEND COPY TO | ANS | 9 | 19 | 0 | 9 | 186 | 2.007:NY > |
| FBI | C ⁵ | 2.014 | FBI NUMBER | AN | 1 | 9 | 1 | 1 | 16 | 2.014:627 |
| DOA | O | 2.045 | DATE OF ARREST | N | 8 | 8 | 0 | 1 | 15 | 2.045:199 |
| DOS | O | 2.046 | DATE OF ARREST - SUFFIX | A | 1 | 1 | 0 | 1 | 8 | 2.046:L< |
| CRI | M | 2.073 | CONTROLLING AGENCY IDENTIFIER | ANS | 1 | 9 | 1 | 3 | 36 | 2.073:NY |

| | | | | | | | | | | |
|-----|----------------|-------|-----------------------------|-----|---|----|---|---|----|---|
| EXP | O | 2.080 | RESPONSE EXPLANATION | ANS | 1 | 50 | 0 | 1 | 57 | 2.080:PH FOUND P SPECIFIC DOS<GS |
| UCN | C ⁶ | 2.081 | UNIVERSAL CONTROL NUMBER | AN | 1 | 9 | 0 | 1 | 16 | 2.081:407 |
| REC | M ³ | 2.082 | RESPONSE CODE | A | 1 | 1 | 1 | 1 | 8 | 2.082:Y< |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Page 5: [61] Deleted **Cathy Wimer** **5/12/2008 3:02:00 PM**

| Identifier | Condition | Field No. | Field Name | Character Type | Field Size Per Occurrence | | Occurrences | | Max. No. of Bytes Including Character Separators and Field Number | Exam |
|------------|----------------|-----------|-------------------------------|----------------|---------------------------|------|-------------|------|---|---|
| | | | | | Min. | Max. | Min. | Max. | | |
| LEN | M | 2.001 | LOGICAL RECORD LENGTH | N | 2 | 7 | 1 | 1 | 14 | 2.001:909 |
| IDC | M | 2.002 | IMAGE DESIGNATION CHARACTER | N | 2 | 2 | 1 | 1 | 9 | 2.002:020 |
| ATN | O | 2.006 | "ATTENTION" INDICATOR | ANS | 3 | 30 | 0 | 1 | 37 | 2.006:SA DOE,RM |
| SCO | O | 2.007 | SEND COPY TO | ANS | 9 | 19 | 0 | 9 | 186 | 2.007:NY > |
| FBI | C ⁵ | 2.014 | FBI NUMBER | AN | 1 | 9 | 1 | 1 | 16 | 2.014:627 |
| DOA | M | 2.045 | DATE OF ARREST | N | 8 | 8 | 0 | 1 | 15 | 2.045:199 |
| DOS | O | 2.046 | DATE OF ARREST - SUFFIX | A | 1 | 1 | 0 | 1 | 8 | 2.046:L< |
| CRI | M | 2.073 | CONTROLLING AGENCY IDENTIFIER | ANS | 1 | 9 | 1 | 3 | 36 | 2.073?HY > |
| EXP | O | 2.080 | RESPONSE EXPLANATION | ANS | 1 | 50 | 0 | 1 | 57 | 2.080:PH FOUND P SPECIFIC DOS<GS |
| UCN | C ⁶ | 2.081 | UNIVERSAL CONTROL NUMBER | AN | 1 | 9 | 0 | 1 | 16 | 2.081:407 |
| REC | M ³ | 2.082 | RESPONSE CODE | A | 1 | 1 | 1 | 1 | 8 | 2.082:Y< |

Under the Condition column: O = optional; M = mandatory; C = conditional, see notes.

Under the Character Type column: A = alpha; B = binary; N = numeric; S = special characters.

Page 6: [62] Deleted **Cathy Wimer** **7/3/2008 8:34:00 AM**

LCD 14.005 TENPRINT CAPTURE DATE

Page 9: [63] Deleted **Cathy Wimer** **7/3/2008 9:22:00 AM**

RSV 99.003 RESERVED FOR FUTURE INCLUSION

RSV 99.006- RESERVED FOR FUTURE INCLUSION

99.099

RSV 99.105- RESERVED FOR FUTURE INCLUSION

99.199

Page 17: [64] Deleted **Cathy Wimer** **5/12/2008 3:14:00 PM**

9.012 MRC MINUTIAE AND RIDGE COUNT DATA

9.012A* MDX INDEX NUMBER

| | | |
|---------|----------|--|
| 9.012B* | MXYTHETA | X, Y, THETA VALUES |
| 9.012C* | MQUAL | QUALITY MEASURE |
| 9.012D* | MTD | MINUTIA TYPE DESIGNATION |
| 9.012E* | MCOUNT | RIDGE COUNT DATA |
| 9.013 | AFV | AFIS FEATURE VECTOR |
| 9.014 | FGN | FINGER NUMBER |
| 9.015 | NMN | NUMBER OF MINUTIAE |
| 9.016 | FCP | FINGERPRINT CHARACTERIZATION PROCESS |
| 9.016A* | VEN | EQUIPMENT |
| 9.016B* | VID | VERSION IDENTIFIER |
| 9.016C* | MET | METHOD |
| 9.017 | APC | AFIS/FBI PATTERN CLASSIFICATION |
| 9.017A* | APAT | PATTERN CLASSIFICATION |
| 9.017B* | RCN1 | FIRST SUBPATTERN RIDGE COUNT |
| 9.017C* | RCN2 | SECOND SUBPATTERN RIDGE COUNT |
| 9.018 | ROV | REGION OF VALUE POLYGON |
| 9.018A* | XYM | VERTEX (XXXXYYYY) |
| 9.019 | COF | COORDINATE OFFSETS |
| 9.019A* | XYP | OFFSET TO UL CORNER SUBIMAGE (XXXXYYYY) |
| 9.019B* | XYP | CENTER OF ROTATION IN SUBIMAGE (XXXXYYYY) |
| 9.019C* | THET | ROTATION ANGLE CW DEGREES (III.FFFF) |
| 9.019D* | XYP | ROTATION CENTER IN ROTATED SUBIMAGE (XXXXYYYY) |
| 9.019E* | XYP | OFFSET TO UL CORNER FINAL SUBIMAGE (XXXXYYYY) |
| 9.020 | ORN | ORIENTATION UNCERTAINTY |
| 9.021 | CRA | CORE ATTRIBUTES |
| 9.021A* | XYM | LOCATION (XXXXYYYY) |
| 9.021B* | DID | DIRECTION IN DEGREES (DDD) |
| 9.021C* | PUM | POSITION UNCERTAINTY (RRRR) |
| 9.022 | DLA | DELTA ATTRIBUTES |
| 9.022A* | XYM | LOCATION (XXXXYYYY) |
| 9.022B* | DID | UPWARD FLOW DIRECTION (DDD) |
| 9.022C* | DID | LEFTWARD FLOW DIRECTION (DDD) |
| 9.022D* | DID | RIGHTWARD FLOW DIRECTION (DDD) |
| 9.022E* | PUM | POSITION UNCERTAINTY (RRRR) |

| | | |
|---------|-----|--|
| 9.023K* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 6 (NNNCC) |
| 9.023L* | MRO | MINUTIA INDEX AND RIDGE COUNT OCTANT 7 (NNNCC) |
| 9.023M* | RSO | OCTANT RESIDUALS (RRRRRRRR) |
| 9.024 | CHQ | CHARACTERIZATION QUALITY |
| 9.025 | CLQ | CLASSIFIER QUALITY |
| 10.001 | LEN | LOGICAL RECORD LENGTH |
| 10.002 | IDC | IMAGE DESIGNATION CHARACTER |
| 10.003 | IMT | IMAGE TYPE |

| | | |
|--------|-----|----------------------------|
| 10.004 | SRC | SOURCE AGENCY/ORI |
| 10.005 | PHD | PHOTO DATE |
| 10.006 | HLL | HORIZONTAL LINE LENGTH |
| 10.007 | VLL | VERTICAL LINE LENGTH |
| 10.008 | SLC | SCALE UNITS |
| 10.009 | HPS | HORIZONTAL PIXEL SCALE |
| 10.010 | VPS | VERTICAL PIXEL SCALE |
| 10.011 | CGA | COMPRESSION ALGORITHM |
| 10.012 | CSP | COLOR SPACE |
| 10.020 | POS | SUBJECT POSE |
| 10.021 | POA | POSE OFFSET ANGLE |
| 10.022 | PXS | PHOTO DESCRIPTION |
| 10.023 | PAS | PHOTO ACQUISITION SOURCE |
| 10.024 | SQS | SUBJECT QUALITY SCORE |
| 10.025 | SPA | SUBJECT POSE ANGLES |
| 10.026 | SXS | SUBJECT FACIAL DESCRIPTION |
| 10.027 | SEC | SUBJECT EYE COLOR |
| 10.028 | SHC | SUBJECT HAIR COLOR |
| 10.029 | SFP | SUBJECT FEATURE POINTS |
| 10.030 | DMM | DEVICE MONITORING MODE |
| 10.040 | SMT | NCIC DESIGNATION CODE |
| 10.041 | SMS | SCAR/MARK/TATTOO SIZE |
| 10.042 | SMD | SMT DESCRIPTORS |
| 10.043 | COL | COLORS PRESENT |
| 10.999 | DAT | IMAGE DATA |

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 18: [66] Formatted Cathy Wimer 7/3/2008 8:24:00 AM

Font: Times New Roman

Page 1: [67] Deleted Cathy Wimer 5/12/2008 3:04:00 PM

002

Page 1: [67] Deleted Cathy Wimer 5/12/2008 3:04:00 PM

APRIL 1, 2008

Page 20: [68] Deleted Cathy Wimer 5/12/2008 3:17:00 PM

Table L-2. Complete Element Cross-Reference List by Tag Number

| EBTS Tag Number | Element ID | Element Name |
|------------------------|-------------------|-----------------------------|
| 15.001 | LEN | LOGICAL RECORD LENGTH |
| 15.002 | IDC | IMAGE DESIGNATION CHARACTER |
| 15.003 | IMP | IMPRESSION TYPE |
| 15.004 | SRC | SOURCE AGENCY/ORI |
| 15.005 | PCD | PALMPRINT CAPTURE DATE |
| 15.006 | HLL | HORIZONTAL LINE LENGTH |
| 15.007 | VLL | VERTICAL LINE LENGTH |
| 15.008 | SLC | SCALE UNITS |
| 15.009 | HPS | HORIZONTAL PIXEL SCALE |

| | | | | | | | | | | |
|----------------------------|---------|------|---|---|-------|------|---|---|---|------------------|
| TS - LATENT | 3.4.1.3 | SRL | 1 | 1 | 0-NCR | 0 | 0 | 0 | 0 | LFIS, LFFS |
| ATION RESPONSE | 3.4.1.6 | LPNR | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LPNQ |
| ENT MATCH RESPONSE | 3.4.1.4 | ULM | 1 | 1 | 1-10 | 0-10 | 0 | 0 | 0 | LFIS, LFFS |
| NSOLVED LATENT DELETE | 3.5.1.5 | UULD | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LFIS, LFFS |
| ACTION ERROR | 3.4.1.7 | ERRL | 1 | 1 | 0 | 0 | 0 | 0 | 0 | LFIS, LFFS, LPNQ |
| <i>Maintenance Request</i> | 3.5 | | | | | | | | | |
| ENT RECORD DELETE | 3.5.1.4 | ULDR | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ULD |
| ENT ADD CONFIRM RESPONSE | 3.5.1.3 | ULAR | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ULAC |
| NSOLVED LATENT DELETE | 3.5.1.5 | UULD | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ULAC |
| ACTION ERROR | 3.5.1.7 | ERRL | 1 | 1 | 0 | 0 | 0 | 0 | 0 | ULD, ULAC |

Page 1: [74] Deleted Cathy Wimer 5/12/2008 3:22:00 PM

| | | | | | | | |
|-----------------------|--------------------------------------|---|---|--|--|--|--|
| 02 – INTERNAL ONLY | Unauthorized Criminal History Access | Request suspended. Initiate a Print Screen and route document and printout to supervisor. | 0 | | | | |
| 03 – INTERNAL ONLY | Unauthorized SPF Modification | Request suspended. Route to supervisor. PRD review and authorization is required. | 0 | | | | |

Page 1: [75] Deleted Cathy Wimer 5/12/2008 3:22:00 PM

| | | | | | | | |
|-----------------------|---|--|---|--|-----|--|--|
| 05 – INTERNAL ONLY | Unauthorized Criminal History Access | Requestor is not authorized to change existing record. Document specialist review and authorization is required. | 0 | | | | |
| 06 – INTERNAL ONLY | Unauthorized Processing or SPF Modification | Requestor is not authorized for requested action. Document specialist review and authorization is required. | 0 | | | | |
| 07 – INTERNAL ONLY | Unauthorized Criminal History Access | Requestor is not authorized to access existing record with FNU %1. Hits to Wants review and authorization is required. | 1 | | FNU | | |

Page 1: [76] Deleted Cathy Wimer 5/12/2008 3:23:00 PM

| | | | | | | | |
|-----------------------|---|---|---|--|--|--|--|
| 10 – INTERNAL ONLY | Hits to Want | IDRR or NIDR cannot be provided without proper authorization. Route to Answer Hits to Wants. | 0 | | | | |
| 11 – INTERNAL ONLY | An Unauthorized IDRR/NIDR Request (SPF 5/6/C/N) | Request suspended. Route to Supervisor. PRD review and authorization is required. | 0 | | | | |
| 12 – INTERNAL ONLY | Unauthorized IDRR Request (DOD or SPF K) | Unauthorized Service Provider not (DOCSPEC) requests IDRR (A1040) for a subject with DOD in identification data or SPF=K. | 0 | | | | |
| 13 – INTERNAL ONLY | Unauthorized Criminal History Request (OFO) | An OFO User is authorized to use the Criminal History request only for an IDRR, either printed locally or displayed. | 0 | | | | |
| 14 – INTERNAL ONLY | Unauthorized CCA Update | Requestor is not authorized to update the CCA file. | 0 | | | | |
| 15 – INTERNAL ONLY | Unauthorized File Update | Requestor is not authorized to update the requested file. | 0 | | | | |

Page 5: [77] Deleted Cathy Wimer 5/12/2008 3:23:00 PM

| | | | | | | | |
|-----------------------|----------------|--|---|--|--|--|--|
| 18 – INTERNAL ONLY | Route to Wants | Route this document to the Wants group for processing. | 0 | | | | |
|-----------------------|----------------|--|---|--|--|--|--|

Page 5: [78] Deleted Cathy Wimer 5/12/2008 3:24:00 PM

| | | | | | | | |
|-----------------------|---|---|---|--|-----|--|--|
| 53 – INTERNAL ONLY | Attempt to Consolidate AUD M Record | The request for consolidation has been made against a record %1 in the Manual File. Record must be converted. | 1 | | FNU | | |
| 54 – INTERNAL ONLY | Reverse Consolidation Pointers | Reverse kept FNU (%1) and killed FNUs due to the III pointers contained in the respective records. | 1 | | FNU | | |
| 55 – INTERNAL ONLY | Consolidation Subject Contains NFF State Pseudo Pointer | Consolidation attempt has been made against subject record containing a Pseudo Pointer for an NFF state for FNU %1. | 1 | | FNU | | |

| | | | | | | |
|-----------------------|-----------------------------|---|---|-----|--|--|
| 36 – INTERNAL ONLY | Reverse Consolidation Wants | Reverse kept FNU %I and killed FNUs due to Wants contained in the respective records. | 1 | FNU | | |
|-----------------------|-----------------------------|---|---|-----|--|--|

Page 7: [79] Deleted Cathy Wimer 5/13/2008 7:39:00 AM

| | | | | | | |
|-----------------------|--|--|---|--|--|--|
| 32 – INTERNAL ONLY | ORI Exists in CCA File | The ORI contained in the Add request already exists in the CCA File. | 0 | | | |
| 33 – INTERNAL ONLY | ORI does not exist in CCA File | The ORI contained in the maintenance request does not exist in the CCA File. | 0 | | | |
| 34 – INTERNAL ONLY | Alternate ORI does not exist in CCA File | The alternate ORI contained in the maintenance request does not exist in the CCA File. | 0 | | | |
| 35 – INTERNAL ONLY | Alternate ORI cannot be deleted | Cannot delete alternate ORI because ONC is equal to "A." | 0 | | | |
| 36 – INTERNAL ONLY | CRS Data do not exist | The maintenance request references CRS Data that do not exist. | 0 | | | |
| 37 – INTERNAL ONLY | CRS Data already exist | The maintenance request has attempted to add CRS Data that already exist. | 0 | | | |
| 38 – INTERNAL ONLY | Attempt to Update AUD W Record | The maintenance request has attempted to add data to a deleted record. | 0 | | | |

Page 7: [80] Deleted Cathy Wimer 5/13/2008 7:42:00 AM

| | | | | | | |
|-----------------------|-----------------------------|--|---|--|--|--|
| 33 – INTERNAL ONLY | Attempt to Delete Last Want | A request has been received to delete the last active Want from a record containing an AUD = "P." | 0 | | | |
| 34 – INTERNAL ONLY | AKA/ANA Error | A request has been made to delete or modify AKA with matching ANA present. | 0 | | | |
| 35 – INTERNAL ONLY | ANF/Name Error | A request has been made to modify ANF without a matching AKA or MNM present. | 0 | | | |
| 36 – INTERNAL ONLY | DOB Delete Error | A request has been made to delete the last DOB contained in the SCH record. | 0 | | | |
| 37 – INTERNAL ONLY | DOB Modification Error | A request has been made to modify a DOB to "unknown" (all zeroes) with DOBs remaining in the SCH record. | 0 | | | |
| 38 – INTERNAL ONLY | Arrest Segment Data Error | This maintenance request must include ACH, AON, and AOL. | 0 | | | |

Page 7: [81] Deleted Cathy Wimer 5/13/2008 7:42:00 AM

| | | | | | | |
|-----------------------|--------------------------|---|---|--|--|--|
| 32 – INTERNAL ONLY | Illegal AID Modification | Cannot change the ORI to a different type or different state. | 0 | | | |
|-----------------------|--------------------------|---|---|--|--|--|

Page 7: [82] Deleted Cathy Wimer 5/13/2008 7:42:00 AM

| | | | | | | |
|-----------------------|-----------------------|--|---|--|--|--|
| 34 – INTERNAL ONLY | TOW/AID Error | If input TOW or input AID is blank. | 0 | | | |
| 35 – INTERNAL ONLY | Insufficient CCA Data | Cannot add, modify, or delete an ORI. | 0 | | | |
| 36 – INTERNAL ONLY | ORI/ZIP | The format of the field ZIP is not consistent with the country specified by ORI. | 0 | | | |

Page 7: [83] Deleted Cathy Wimer 5/13/2008 7:43:00 AM

| | | | | | | |
|-----------------------|-------------------|--|---|--|--|--|
| 38 – INTERNAL ONLY | Invalid ONC Value | An attempt has been made to add a new ORI to a record containing an ONC value other than "A" or "D." | 0 | | | |
|-----------------------|-------------------|--|---|--|--|--|

Page 9: [84] Deleted Cathy Wimer 5/13/2008 7:43:00 AM

| | | | | | | |
|-----------------------|--|--|---|---|--|--|
| 35 – INTERNAL ONLY | Ad Hoc Subject Search Candidate Cap Exceeded | The number of candidates meeting the submitted search criteria, %1, exceeds the maximum allowed, %2. Refine the criteria before resubmitting the search. | 2 | Number of candidates returned from AdHoc Search (element NUMCANS) | The element MAXCANS from the search request. If MAXCANS is not specified in the search request, the default value. | |
|-----------------------|--|--|---|---|--|--|

| | | | | | | |
|-----------------------|-------------------------------------|--|---|------------|--|--|
| 36 – INTERNAL ONLY | Invalid Request for Subject Record | IDRR or NIDR cannot be provided for subject with non-blank AUD. | 0 | | | |
| 37 – INTERNAL ONLY | Unable to Print Subject Record | Subject record cannot be printed due to restricted cycles. | 0 | | | |
| 38 – INTERNAL ONLY | Unable to Print Subject Record | Subject record cannot be printed for the specified contributor due to restricted cycles. | 0 | | | |
| 39 – INTERNAL ONLY | Extraneous Data | The file maintenance request contained data for %1 that is either not needed or not allowed in this context. | 1 | Field Name | | |
| 40 – INTERNAL ONLY | Invalid AUD Code Conversion Request | Active Want on file for this subject. Record cannot be converted from AUD P to AUD T. | 1 | FNU | | |